
TILTING & SLEWING FORKS CARRIAGE



- Perfectly adapted to the handling of sugar beets and other root crops & tubercules by scooping the beet and leaving the soil behind.
- Openwork spill guard for a better visibility.
- Strong structure for long lasting use.
- Not adapted to earthwork or stone handling.

- FEM cat forks. 2.
- 90°/90° hydraulic rotation.
- Use of reliable Manitou components.
- Rotation with 2 cylinders for more precision.
- Straight and turned capacity 1500 kg / 3308 lb.
- Note: Road circulation kit mandatory in Italy. Contact your dealer

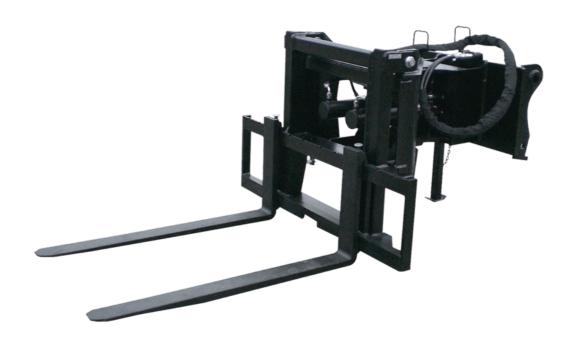

TILTING & SLEWING FORKS CARRIAGE

	PFB 90° (a)	PFB 90° (b)
		755
	1000	1500
	631	662
h1	-	1008
I1	•	2432
	1360	1360
	 	
	9 9	YY
		000040
		923348

PFB 90° (a)	PFB 90° (b)
-	923348
	X
•	X
·	X
	X
	X
	Х
	X
	X
•	Х
	Х
•	Х
	Х
•	Х
	Х
Х	X
	Х
Х	Х
	Х
	Х
X	Χ
	Х
X	Χ
	Х
	X

\times	春 春	





