Technical sheet:

# HIGH CAPACITY AGRICULTURAL GRAB BUCKET



## **Technical characteristics**

- Welded teeth WE.
- Handling materials with a density ≤ 1000 kg/m³ / 62 lb/ft³.
- 500 HB bolt-on cutting edge in standard.
- Reinforced bucket: improved material grip on sides & top Increased struck capacity (1500 L / 53 ft³).

[The 3D picture at the top of this page is the reference CBG  $2480 / 2600 \, MS - 790658$ ].

## **Customer benefits**

- Robust and versatile bucket suitable for massive agricultural applications.
- Reinforced bucket for a massive work output in agricultural applications.
- Ideal to handle cereals and other bulk materials.




#### HIGH CAPACITY AGRICULTURAL GRAB BUCKET Created on October 24, 2025 at 2:08 PM UTC

Technical characteristics		CBG 2480 / 2000 MS	CBG 2480 / 2600 MS		
Distance to center of gravity (in)		1' 3"	1' 3"		
Capacities					
Capacity (Ib)		4409	5732		
Heaped capacity (US gal)		528	687		
Struck capacity (US gal)		396	396		
Weight					
Overall weight (lb)		2701	2992		
Weight and dimensions					
Overall length (in)	l1	4' 11"	5' 6"		
Width (in)		8' 2"	8' 2"		
Closed grapple height (in)	h33	4' 11"	4' 11"		
Opened grapple height (in)	h34	7" 6"	8' 1"		
Working Parameters					
Required machine equipment		<b>\beta</b> \beta	88		
Teeth		6	7		
Minimum forks spread (in)	b5	1' 6"	1' 2"		
Maximum forks spread (in)	b5	1' 6"	1' 2"		
Other Data for Attachments					
Wear plate hardness		500	500		

Machines compatibility	CBG 2480 / 2000 MS	CBG 2480 / 2600 MS
Reference number with bolted wearplate (WP)	790656	790658
MLT 841-145 PS+	X	
MLT 850-145 V+	X	X
MLT 961-160 V+ L		X
MLT 1041-145 PS+L	X	
MLT-X 841 - 145 PS+	X	
MLT-X 850-145 V+	X	X
MLT-X 961-160 V+ L		Х
MLT-X 1041-145 PS+L	X	
MLT 840-145 PS+ <b>OLD</b>	X	
MLT 845-100 H OLD	X	
MLT 845-120 <b>OLD</b>	X	
MLT 961-145 V+ L <b>OLD</b>		Х
MLT 1040-145 PS+ L <b>OLD</b>	X	
MLT-X 840-140 PS+ OLD	X	
MLT-X 845-120 OLD	Х	
MLT-X 845-120 H <b>OLD</b>	Х	
MLT-X 961-145 V+ L <b>OLD</b>		Х
MLT-X 1040-140 PS+ L OLD	X	

TABLE SYMBOL							
X	No predisposition required	88	Hydraulic line		Return piping to hydraulic oil tank		
	Electric predisposition		Platform predisposition		Tyre handler, cylinder handler predisposition		

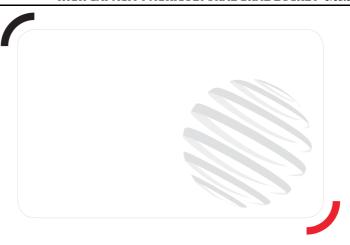



#### **Head Office**

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes