



SLIM TYRE HANDLER










- A compact solution for all limited-access tyre removal operations.
- Fork-based concept (2 pairs of forks), suitable for underground mining trucks.
- Perfect tyre holding, fork covered with anti-slip material.
- Available on several telehandler types.
- Limited machine downtime.
- Maximum capacity up to 2900 kg/6939 lbs.
- Clamping with forks, 93mm thin.
- Accept a wide variety of tyre diameters.
- Compact design, centre of gravity stays close to the telehandler.
- Body rotation : $\pm 360^\circ$.
- Constant side shift : ± 100 mm.
- Control: from cab or remote control (MHT).


[The 3D picture at the top of this page is the reference TH 35 / 2900 S - 939040].

SLIM TYRE HANDLER

	TH 33 / 2000 S	TH 35 / 2900 S
	2000	2900
	1160	1345
h17	916	916
l1	1743	1841
s	93	107
	1360	1650
	1149	1199
	480 / 2100	650 / 2650
		
	360	360
	100	100
	4	4
	470	640
	2120	2700

	TH 33 / 2000 S	TH 35 / 2900 S
	939039	939040
	X	-
	X	-
	X	X
	X	X
	X	X
	X	X
	X	X
	939039	939040
	X	X
	X	X
	X	X
	X	X
	X	X
	52721340	-
	X	-
	X	-
	X	-
	X	-
	X	-
	X	-
	X	-
	X	-
	X	-
	X	-
	X	-
	X	-
	X	-

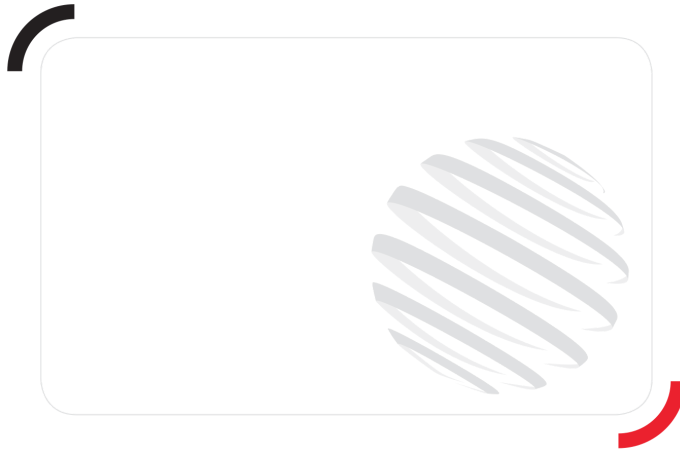

 **MANITOU**
HANDLING YOUR WORLD

