技術シート：

BALE CLAMP SUPER COMPACT

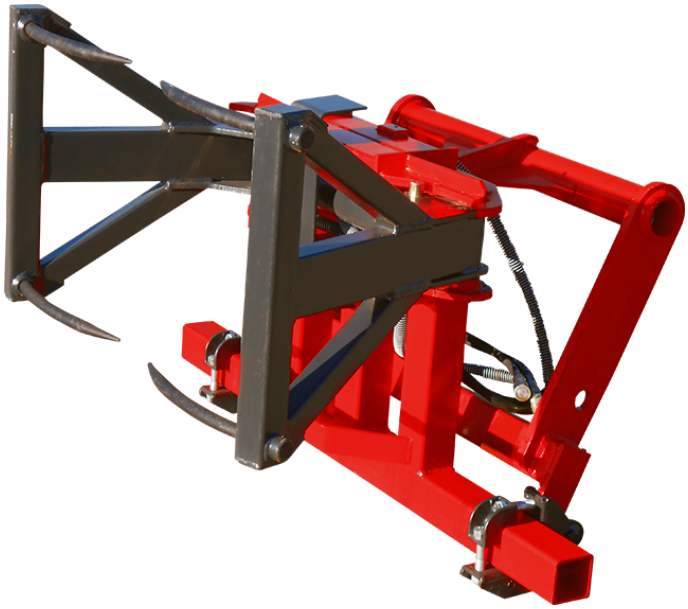

諸元

- 2x2 teeth
- Non-synchronized closure
- Capacity: 800 kg / 1764 lb
- Handles 1 round bale - Ø 1,8 m / 6 ft maximum
- Handles 1 rectangular bale - 1,2 m / 4 ft high.

[The 3D picture at the top of this page is the reference PBG 2x2 - 757639].

お客様のメリット

- Easy to use and durable attachment
- Very compact clamp - ideal for under roof stacking
- Rounded teeth in wrought iron that offer an accurate and clean penetration on materials.

キャパシティー		PBG 2x2
諸元 (kg)		800
重量		
重量 (kg)		156
仕様		
全高 (mm)	h17	869
全長 (mm)	l1	922
フォーク長 (mm)	l	335
幅 (mm)		1090
アーム長 (mm)		500
ワーキング パラメーター		
機械設備		
歯 / 爪		2 / 2
最大開口 (mm)		1583

マシンの互換性	PBG 2x2
参照番号	757639
MLT 420-60 H	X
MLT 625-75 H	X
MLT 625 e	X
MLT 630-115 (S2)	X
MLT 630-115 V (S2)	X
MLT 630-115 V CP (S2)	X
MLT 635-130 PS+ (S2)	X
MLT 635-140 V+ (S2)	X
MLT 730-115 V (S2)	X
MLT 730-115 V CP (S2)	X
MLT 733-115 (S2)	X
MLT 738-130 PS+ (S1)	X
MLT 742-130 PS+ (S1)	X
MLT 742-140 V+ (S1)	X
MLT 841-145 PS+	X
MLT 940-140 V+ (S2)	X
MLT 1041-145 PS+L	X
MLT-X 625-75 H	X
MLT-X 735 T LSU	X
MLT-X 738-130 PS+ (S1)	X
MLT-X 741 T LSU	X
MLT-X 841 - 145 PS+	X
MLT-X 1041-145 PS+L	X
MLT 630-105 ST4 OLD	X
MLT 630-105 V CP ST4 OLD	X
MLT 630-105 V ST4 OLD	X
MLT 630-115 (S1) OLD	X
MLT 630-115 V (S1) OLD	X
MLT 630-115 V CP (S1) OLD	X
MLT 635-130 PS+ ST4 OLD	X
MLT 635-130 PS+ (S1) OLD	X
MLT 635-140 V+ (S1) OLD	X
MLT 635-140 V+ ST4 OLD	X
MLT 730-115 V (S1) OLD	X
MLT 730-115 V CP (S1) OLD	X
MLT 730-115 V CP ST4 OLD	X
MLT 730-115 V ST4 OLD	X
MLT 733-115 OLD	X
MLT 733-115 LSU (S1) OLD	X
MLT 733-115 LSU ST4 OLD	X
MLT 733-115 ST4 OLD	X
MLT 737-130 PS+ (S1) OLD	X
MLT 737-130 PS+ ST4 OLD	X
MLT 741-130 PS+ (S1) OLD	X
MLT 741-140 V+ (S1) OLD	X
MLT 741-140 V+ ST4 OLD	X
MLT 840-145 PS+ OLD	X
MLT 845-100 H OLD	X
MLT 845-120 OLD	X
MLT 940-140 V+ (S1) OLD	X
MLT 940-140 V+ ST4 OLD	X
MLT 1040-145 PS+ L OLD	X
MLT-X 737-130 PS+ OLD	X
MLT-X 737-130 PS+ (S2) OLD	X
MLT-X 741-140 V+ S1 OLD	X
MLT-X 840-140 PS+ OLD	X
MLT-X 845-120 OLD	X
MLT-X 845-120 H OLD	X
MLT-X 1040-140 PS+ L OLD	X

記号の表					
	前処理が不要		油圧ライン		タンクへの油圧リターン
	電気要素		プラットフォーム要素		タイヤクランプ、シリンダークランプ要素

本社ビル
B.P. 249 - 430 rue de l'Aubinière オービニエール通り
44150 Ancenis Cedex - France
電話 +33 (0)2 40 09 10 11 - ファックス +33 (0)2 40 09 10 97
www.manitou.com

本書では、マニトウ製品の構成バージョンやオプションについて説明していますが、機器によって異なる場合があります。このパンフレットで紹介されている機器は、バージョンによってシリーズの一部であったり、オプションであったり、あるいは利用できない場合があります。Manitouは、いつでも予告なしに、記載・表現されている仕様を変更する権利を有します。提供された仕様はメーカーを拘束するものではありません。詳細につきましては、マニトウの代理店にお問い合わせください。本資料は、契約上の拘束力を有するものではありません。製品の提示は、契約上の拘束力はありません。仕様のリストは無尽蔵です。ロゴおよび会社のビジュアル・アイデンティティはManitouが所有しており、許可なく使用することはできません。すべての権利はマニトウに帰属します。このパンフレットに掲載されている写真や図は、相談や情報提供を目的としています。
MANITOU BF SA - 取締役会を有する有限会社 - 株式資本。39 668 399 ユーロ - 857 802 508 RCS Nantes