


Ficha técnica :

FIXED SLEWING ROOFER PLATFORM

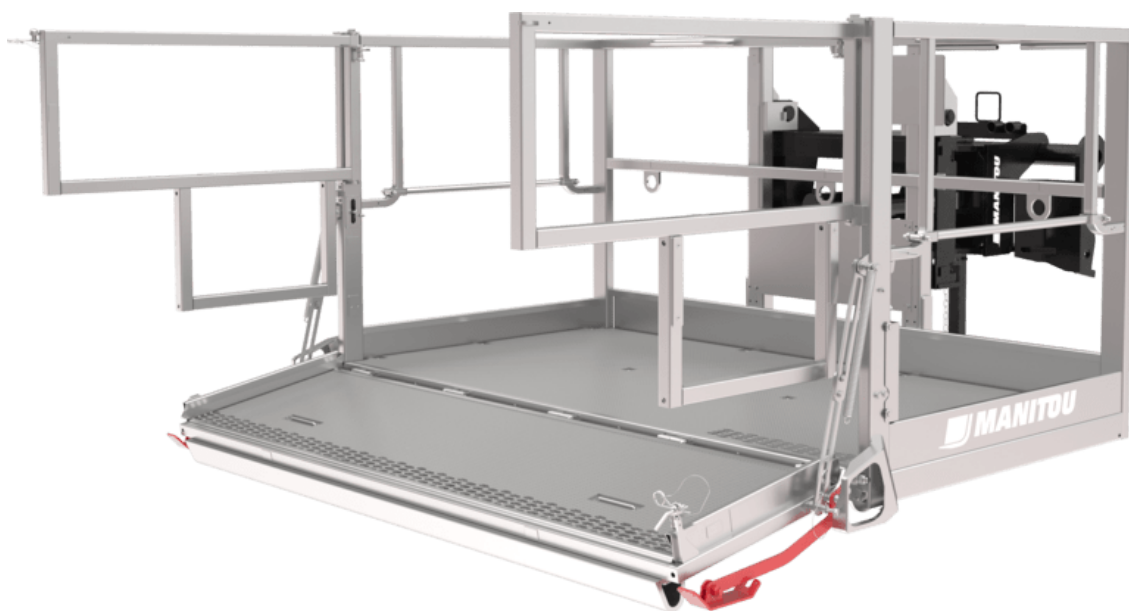

Customer benefits

- Cutting edge platforms designed for roof work.
- Secured platform.
- Non-slip metal flooring.
- Heavy duty and galvanised structure for an improved longevity.
- Platform 2,3x1.2: possibility to load a Euro pallet.

Technical characteristics

- Total capacity 1000 kg, of which 400 kg can be applied of the overhanging part.
- Slewing platform +/- 90° on both sides.
- Legally approved for 3 persons.
- Presence sensors forbidding any movement after door opening.
- Overload sensor.
- Physical sensors allowing door opening only if roof contact.

[The 3D picture at the top of this page is the reference NC 2.3 x 1.2 - 923323].

Technical characteristics		NC 2.3 x 1.2	PSR 2300 / 1000F 3P
Distance to center of gravity (mm)		1300	1300
Capacities			
Capacity including people (kg)		1000	1000
Number of people		3	3
Weight			
Overall weight (kg)		945	945
Weight and dimensions			
Overall height (mm)	h17	1307	1307
Overall length (mm)	l1	2430	2430
Width (mm)		2404	2404
Depth (mm)	p5	1120	1120
Working Parameters			
Machine Equipment			
Rotation 1 (°)		90	90
Rotation 2 (°)		90	90

Compatibilidad de la máquina		NC 2.3 x 1.2	PSR 2300 / 1000F 3P
Reference number E-RECO		923323	52719261
MRT 1645 75		-	X
MRT 1645 115		-	X
MRT 1845 75		-	X
MRT 1845 115		-	X
MRT 2145 115		-	X
MRT 2260		-	X
MRT 2260 e		-	X
MRT 2545 115		-	X
MRT 2570		-	X
MRT 2660		-	X
MRT 2660 e		-	X
MRT 3060		-	X
MRT 3570		-	X
MRT 3570 ES		-	X
MRT-X 1645		-	X
MRT-X 1845		-	X
MRT-X 2145		-	X
MRT-X 2260		-	X
MRT-X 2545		-	X
MRT-X 2570		-	X
MRT-X 2660		-	X
MRT-X 3060		-	X
MRT-X 3570		-	X
MRT-X 3570 ES		-	X
MRT 1640 Easy T4 S2 360° OLD		X	-
MRT 1840 Easy T4 S2 360° OLD		X	-
MRT 1840 Easy T4 S2 400° OLD		X	-
MRT 2145 Easy 3B S2 360° OLD		X	-
MRT 2145 Easy T4 S2 360° OLD		X	-
MRT 2145 Easy T4 S2 400° OLD		X	-
MRT 2150 Privilege Plus OLD		X	-
MRT 2470 Privilege Plus OLD		X	-
MRT 2545 Easy T4 S2 360° OLD		X	-
MRT 2550 Privilege Plus OLD		X	-
MRT 3050 Privilege Plus OLD		X	-
MRT-X 1440 Easy 400° OLD		X	-
MRT-X 2150 Privilege Plus OLD		X	-
MRT-X 2470 Privilege Plus OLD		X	-
MRT-X 2550 Privilege Plus OLD		X	-
MRT-X 3050 Privilege Plus OLD		X	-

TABLA DE SÍMBOLOS

	No se requiere predisposición		Línea hidráulica		Retomo al depósito de aceite hidráulico
	Predisposición eléctrica		Predisposición de la plataforma		Predisposición manipulador de neumáticos, de cilindros



Oficina Central

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - Francia

Tel.: 00 33 (0)2 40 09 10 11 - Fax: 00 33 (0)2 40 09 10 97

www.manitou.com



Esta publicación describe las versiones y posibilidades de configuración de los productos Manitou que puedan diferir en equipamiento. Los equipamientos presentados en este folleto pueden ser de serie, opcionales o no estar disponibles en algunas versiones. Manitou se reserva el derecho, en cualquier momento y sin previo aviso, de modificar las especificaciones descritas y representadas. Las especificaciones aportadas no comprometen al fabricante. Para más información, póngase en contacto con su concesionario Manitou. Documento no contractual. Presentación de los productos no contractual. Lista de especificaciones no exhaustiva. Los logos y la identidad visual de la empresa son propiedad de Manitou y no pueden ser utilizados sin autorización. Todos los derechos reservados. Las fotos y los esquemas contenidos en este folleto se ofrecen para consulta y a título indicativo solamente.

Manitou BF SA - Sociedad anónima con Consejo de Administración - Capital social: 39 668 399 euros - 857 802 508 RCS Nantes