


Technical sheet :

# **SHEAR BUCKETS**

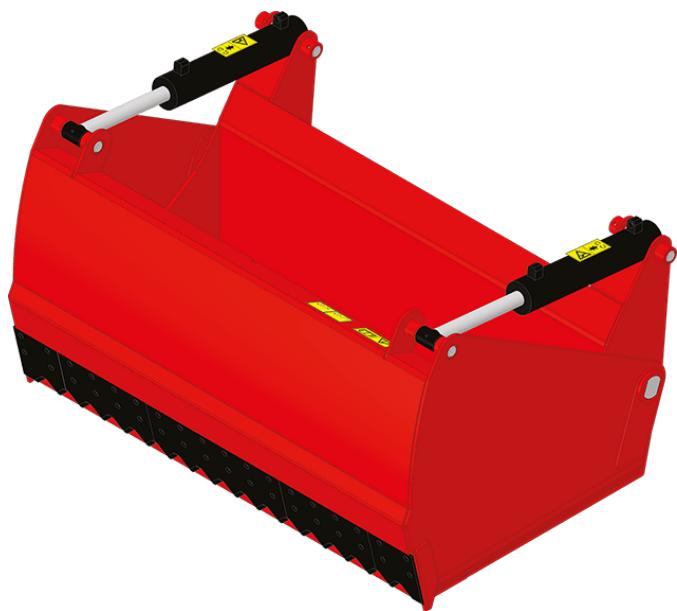

## **Technical characteristics**

- Boxed structure, rigidity & longevity.
- Body made of high resistance steels.
- Heavy duty teeth for easy penetration.
- Lateral shears for a good pit penetration & clean cutting.
- Increased cylinder diameter for more power.
- 500 HB welded cutting edge.

## **Customer benefits**

- Suitable for any type of silage.
- Clean silage pit face, limits secondary fermentation.
- Powerful attachment for a fast cutting.
- Open back for more visibility.
- Bucket-type bottom, ideal for the handling of mineral feed & other materials.




Technical characteristics		SHB 2200 / 1650	SHB 2400 / 1800
Distance to center of gravity (mm)		522	522
<b>Capacities</b>			
Capacity (kg)		1650	1800
Heaped capacity (l)		1650	1800
<b>Weight</b>			
Overall weight (kg)		892	1080
<b>Weight and dimensions</b>			
Overall height (mm)	h17	1010	1010
Overall length (mm)	l1	1295	1295
Width (mm)		2254	2454
Opened grapple height (mm)	h34	1475	1475
Depth (mm)	p5	850	850
<b>Working Parameters</b>			
Required machine equipment			
<b>Other Data for Attachments</b>			
Wear plate hardness		500	500

Machines compatibility		SHB 2200 / 1650	SHB 2400 / 1800
Reference number		52000386	52000387
ALT950		X	-
MLA-T 533-145 V+ - ST5		X	-
MLT 635-130 PS+ (S1)		X	-
MLT 635-130 PS+ (S2)		X	-
MLT 635-140 V+ (S1)		X	-
MLT 635-140 V+ (S2)		X	-
MLT 733-115		-	X
MLT 733-115 (S2)		X	-
MLT 733-115 LSU (S1)		-	X
MLT 737-130 PS+ (S1)		-	X
MLT 738-130 PS+ (S1)		-	X
MLT 741-130 PS+ (S1)		-	X
MLT 741-140 V+ (S1)		-	X
MLT 742-130 PS+ (S1)		-	X
MLT 742-140 V+ (S1)		-	X
MLT 841-145 PS+		-	X
MLT 850-145 V+		-	X
MLT 937-115 (S1)		-	X
MLT 940-140 V+ (S1)		-	X
MLT 940-140 V+ (S2)		-	X
MLT 1041-145 PS+L		-	X
MLT-X 732		X	-
MLT-X 735 T LSU		X	-
MLT-X 735 T LSU (70 KW)		X	-
MLT-X 738-130 PS+ (S1)		-	X
MLT-X 741 T LSU		X	X
MLT-X 841 - 145 PS+		-	X
MLT-X 850-145 V+		-	X
MLT-X 1041-145 PS+L		-	X
MLT 635-130 PS+ ST4 (OLD)		X	-
MLT 635-140 V+ ST4 (OLD)		X	-
MLT 733-115 ST4 (OLD)		-	X
MLT 737-130 PS+ ST4 (OLD)		-	X
MLT 741-140 V+ ST4 (OLD)		-	X
MLT 840-145 PS+ (OLD)		-	X
MLT 940-140 V+ ST4 (OLD)		-	X
MLT 1040-145 PS+ L (OLD)		-	X
MLT-X 737-130 PS+ (OLD)		-	X
MLT-X 737-130 PS+ (S2) (OLD)		-	X
MLT-X 741-140 V+ S1 (OLD)		-	X
MLT-X 840-140 PS+ (OLD)		-	X
MLT-X 1040-140 PS+ L (OLD)		-	X

## TABLE SYMBOL

	No predisposition required		Hydraulic line		Return piping to hydraulic oil tank
	Electric predisposition		Platform predisposition		Tyre handler, cylinder handler predisposition

## Shear buckets - Dimensional drawing

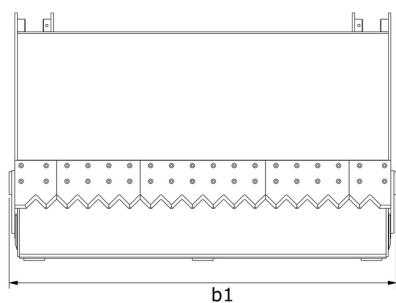



# **MANITOU** HANDLING YOUR WORLD

## Head Office

B.P. 249 - 430 rue de l'Aubinière  
44150 Ancenis Cedex - France  
Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97  
[www.manitou.com](http://www.manitou.com)



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes