

Technical sheet :

BIG BAG FILLING BUCKET



Technical characteristics

- adjustable and hydraulic door opening from the cab.
- Bolt-on cutting edge standard.

Customer benefits


- For loading bulk material like sand, gravel, grains, fertilizer, seeds...
- Enables bulk material to be loaded, big bags to be filled and then moved.
- Saves time and productivity for the operator.
- Ensures less material loss during big bag filling.
- Easy to use: specifically designed for big bag filling, handling and unhooking.

Capacities		BBF 1200 / 600	BBF 1400 / 1100	BBF 1650 / 1750
Heaped capacity (l)		600	1120	1750
Weight				
Overall weight (kg)		455	610	750
Weight and dimensions				
Overall height (mm)	h17	685	923	1158
Overall length (mm)	l1	1549	1723	1896
Width (mm)		1200	1400	1650
Working Parameters				
Required machine equipment				
Maximum density of material (kg/m3)		2000	2000	1000
Opening type		Hydraulic	Hydraulic	Hydraulic
Other Data for Attachments				
E-RECO		No	No	No
Connection system		Manitou	Manitou	Manitou

Machines compatibility	BBF 1200 / 600	BBF 1400 / 1100	BBF 1650 / 1750
Reference number	52676645	52614700	52634800
MLA-T 533-145 V+ - ST5	X	X	-
MLT 420-60 H	X	-	-
MLT 625-75 H	X	X	-
MLT 625 e	X	X	-
MLT 630-115 (S1)	X	X	-
MLT 630-115 (S2)	X	X	-
MLT 630-115 V (S1)	X	X	-
MLT 630-115 V (S2)	X	X	-
MLT 630-115 V CP (S1)	X	X	-
MLT 630-115 V CP (S2)	X	X	-
MLT 635-130 PS+ (S1)	X	X	X
MLT 635-130 PS+ (S2)	X	X	X
MLT 635-140 V+ (S1)	X	X	X
MLT 635-140 V+ (S2)	X	X	X
MLT 730-115 V (S1)	X	X	-
MLT 730-115 V (S2)	X	X	-
MLT 730-115 V CP (S1)	X	X	-
MLT 730-115 V CP (S2)	X	X	-
MLT 733-115	X	X	-
MLT 733-115 (S2)	X	X	-
MLT 733-115 LSU (S1)	X	X	-
MLT 737-130 PS+ (S1)	X	X	X
MLT 738-130 PS+ (S1)	X	X	X
MLT 741-130 PS+ (S1)	X	X	X
MLT 741-140 V+ (S1)	X	X	X
MLT 742-130 PS+ (S1)	X	X	X
MLT 742-140 V+ (S1)	X	X	X
MLT 841-145 PS+	X	X	X
MLT 850-145 V+	X	X	X
MLT 940-140 V+ (S1)	X	X	X
MLT 940-140 V+ (S2)	X	X	X
MLT 961-160 V+ L	X	X	X
MLT 1041-145 PS+L	X	X	X
MLTX 625-75 H	X	X	-
MLTX 732	X	X	-
MLTX 735 T LSU	X	X	X
MLTX 735 T LSU (70 KW)	X	X	X
MLTX 738-130 PS+ (S1)	X	X	X
MLTX 741 T LSU	X	X	X
MLTX 841 - 145 PS+	X	X	X
MLTX 850-145 V+	X	X	X
MLTX 961-160 V+ L	X	X	X
MLTX 1041-145 PS+L	X	X	X
MT 420 H	X	-	-
MT 420 H SKID	X	-	-
MT 625 e	X	X	-
MT 625 H	X	X	-
MT 625 H Comfort	X	X	-
MT 625 HA	X	X	-
MT 730 H	X	X	-
MT 735 75D ST5	X	X	-
MT 930 H	X	X	-
MT 930 HA	X	X	-
MT 935 75D ST5	X	X	-
MT 1135 75 D	X	X	-
MT 1135	X	X	-
MT 1135 H 100D	X	X	-
MT 1335 75D ST5	X	X	-
MT 1335 100D ST5	X	X	-
MT 1335 H 75D ST5	X	X	-
MT 1335 H 100D ST5	X	X	-
MT 1335 HA 75D ST5	X	X	-

Machines compatibility	BBF 1200 / 600	BBF 1400 / 1100	BBF 1650 / 1750
MT 1335 HA 100D ST5	X	X	-
MT-X 420 H	X	-	-
MT-X 625 H	X	X	-
MT-X 625 H Comfort	X	X	-
MT-X 625 HA Comfort	X	X	-
MT-X 735	X	X	-
MT-X 1135	X	X	-
MLT 630-105 ST4 OLD	X	X	-
MLT 630-105 V CP ST4 OLD	X	X	-
MLT 630-105 V ST4 OLD	X	X	-
MLT 635-130 PS+ ST4 OLD	X	X	X
MLT 635-140 V+ ST4 OLD	X	X	X
MLT 730-115 V CP ST4 OLD	X	X	-
MLT 730-115 V ST4 OLD	X	X	-
MLT 733-115 LSU ST4 OLD	X	X	-
MLT 733-115 ST4 OLD	X	X	-
MLT 737-130 PS+ ST4 OLD	X	X	X
MLT 741-140 V+ ST4 OLD	X	X	X
MLT 940-140 V+ ST4 OLD	X	X	X
MLT 961-145 V+ L OLD	X	X	X
MLT-X 737-130 PS+ OLD	X	X	X
MLT-X 737-130 PS+ (S2) OLD	X	X	X
MLT-X 741-140 V+ OLD	X	X	X
MLT-X 741-140 V+ S1 OLD	X	X	X
MLT-X 961-145 V+ L OLD	X	X	X
MLT-X 1035 LT LSU OLD	X	X	X
MT 1135 easy ST5 OLD	X	X	-
MT 1135 H easy ST5 OLD	X	X	-
MT 1135 HA Easy ST5 OLD	X	X	-
MT 1135 ST5 OLD	X	X	-
MT 1335 OLD	X	X	-
MT 1335 easy ST5 OLD	X	X	-
MT 1335 H easy ST5 OLD	X	X	-
MT 1335 HA easy ST5 OLD	X	X	-
MT 1335 ST5 OLD	X	X	-

TABLE SYMBOL					
	No predisposition required		Hydraulic line		Return piping to hydraulic oil tank
	Electric predisposition		Platform predisposition		Tyre handler, cylinder handler predisposition

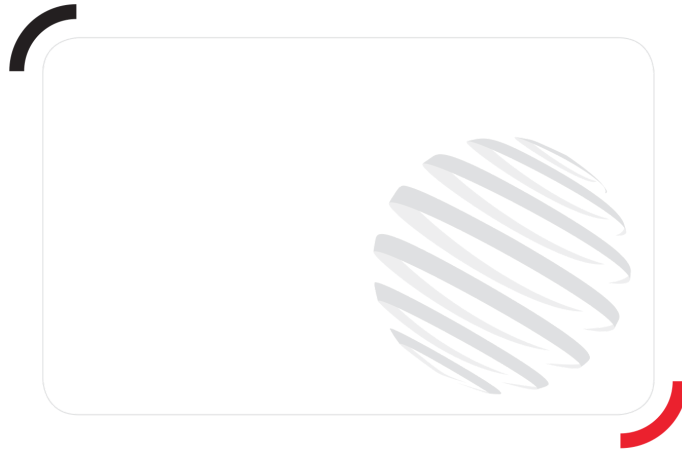

Head Office

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes