Technical sheet :

## FLAIL MOWER (COMPACT MACHINES)



## **Customer benefits**

- Must-have attachment for parks and gardens maintenance.
- Efficient work, cuts grass and small branches in one shot.
- Equipped with a floating deck to work on rough terrain with ease.
- Equipped with chains on the front to minimize projections.

## **Technical characteristics**

- Cut grass up to 30 mm high and small branches up to 2-3 cm diameter.

- Equipped with hammer tools.
- Front protection chains.
- Floating mower deck.

- Machine equipment needed : Hydraulic line - High flow - Return to pipe - Continuous hydraulics - Speed limiter

[The 3D picture at the top of this page is the reference MV 1500 - 52728002].




## FLAIL MOWER (COMPACT MACHINES) Created on May 12, 2024 at 9:37:21 PM UTC

| Weight                |     | MV 1500 |
|-----------------------|-----|---------|
| Overall weight (kg)   |     | 268     |
| Weight and dimensions |     |         |
| Overall height (mm)   | h17 | 633     |
| Overall length (mm)   | 11  | 999     |
| Width (mm)            |     | 1664    |
| Working Parameters    |     |         |
| Machine Equipment     |     | 音音 音匠   |

| Machines compatibility | MV 1500  |
|------------------------|----------|
| All-Tach®              | 52728002 |
| 4 point Carriage       | 52741076 |
| Euro Carriage          | 52741075 |
| GCT 3-14               | x        |
| GCT 3-14               | x        |
| GCT 3-14 +             | x        |
| GCT 3-14+              | x        |
| ULM 412 H              | x        |
| ULM 412 H              | x        |
| ULM 415 H              | x        |
| ULM 415 H              | Х        |

| TABLE SYMBOL |                            |  |                         |  |   |  |  |  |
|--------------|----------------------------|--|-------------------------|--|---|--|--|--|
| $\times$     | No predisposition required |  | Hydraulic line          |  | Return piping to hydraulic oil tank           |  |  |  |
|              | Electric predisposition    |  | Platform predisposition |  | Tyre handler, cylinder handler predisposition |  |  |  |

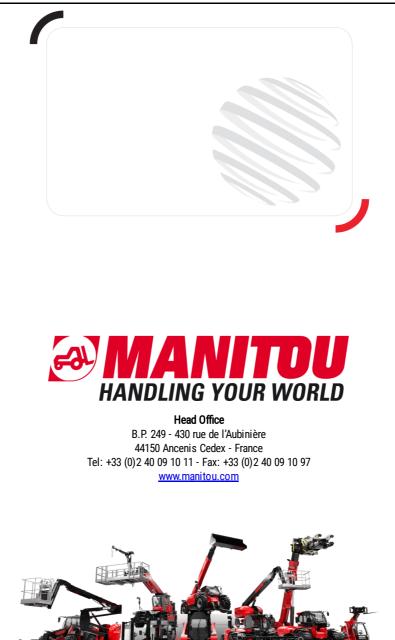

This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes