



- 
- Usually placed in from on a window/ an opening on a deconstructed building to load rubbles.
  - Especially usefull for deconstruction applications: the wide opening of this bucket prevents rubbles & misc. materials from falling to the ground.
  - Designed to suit to MRT's specific boom head position.
  - Note: rotating telehandlers are not designed for intensive loading applications.

- Bucket dedicated to the handling of light materials (< 1000kg/m3).
- Reinforced structure (base, blade and sides).


CBA 1500 / 2450



CBA 1500 / 2450

921279



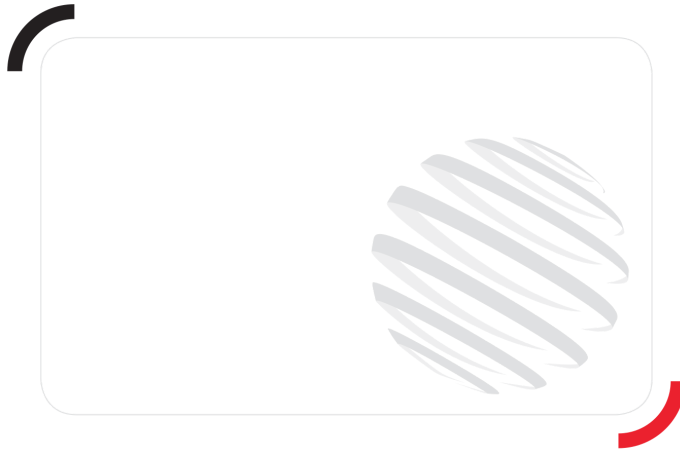

 **MANITOU**  
HANDLING YOUR WORLD

