


Technical sheet :

# ***TUNNELING PLATFORM***

---

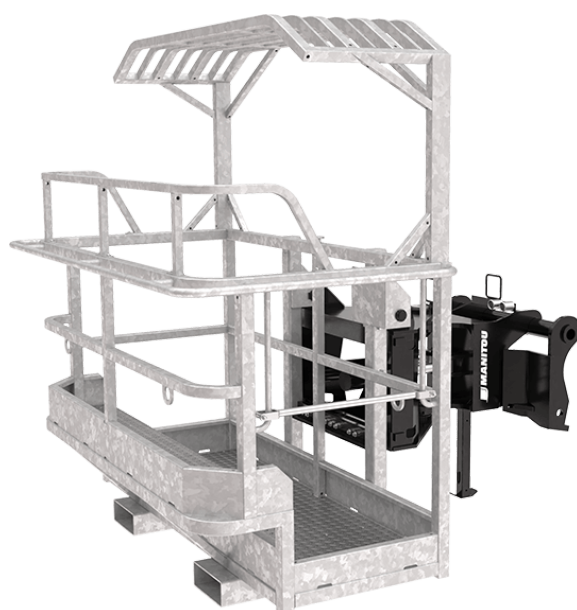

## **Customer benefits**

- Maximum protection for tunneling applications
- No unsafe climbing on the platform required to work above the FOPS roof.
- To use heavy tools in the platform.
- No compromise on safety: EN 280 compliant.

## **Technical characteristics**

- Platform fitted with a FOPS-TYPE roof (length: 580mm / full platform width / 1930 mm under the roof).
- Protected elevated position (+ 300 mm).
- Capacity 1000 kg.
- Rotation 90° on both sides.
- Access: sliding bar on one side.
- Fork sleeves for yard handling.

[The 3D picture at the top of this page is the reference GALLERY PLATFORM - 921356].

| Capacities            |     | GALLERY PLATFORM                                                                  | PST 1800 / 1000 3P FOPS1                                                            |
|-----------------------|-----|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Capacity (kg)         |     | 1000                                                                              | 1000                                                                                |
| Number of people      |     | 3                                                                                 | 3                                                                                   |
| Weight                |     |                                                                                   |                                                                                     |
| Overall weight (kg)   |     | 730                                                                               | 730                                                                                 |
| Weight and dimensions |     |                                                                                   |                                                                                     |
| Overall height (mm)   | h17 | 2125                                                                              | 2125                                                                                |
| Overall length (mm)   | l1  | 2175                                                                              | 2175                                                                                |
| Width (mm)            |     | 1990                                                                              | 1990                                                                                |
| Depth (mm)            | p5  | 1000                                                                              | 1000                                                                                |
| Working Parameters    |     |                                                                                   |                                                                                     |
| Machine Equipment     |     |  |  |
| Rotation 1 (°)        |     | 90                                                                                | 90                                                                                  |
| Rotation 2 (°)        |     | 90                                                                                | 90                                                                                  |

| Machines compatibility                     | GALLERY PLATFORM | PST 1800 / 1000 3P FOPS1 |
|--------------------------------------------|------------------|--------------------------|
| Reference number                           | -                | 52574289                 |
| MT-X 1033 A Mining                         | -                | X                        |
| Reference number E-RECO                    | 921356           | 52719262                 |
| MHT 790 Mining ST5                         | -                | X                        |
| MHT 790 ST5                                | -                | X                        |
| MHT 10135 ST5                              | -                | X                        |
| MHT 10160 ST5                              | -                | X                        |
| MHT 10200 ST5                              | -                | X                        |
| MHT-X 790 Mining                           | -                | X                        |
| MHT-X 10135 ST3A                           | -                | X                        |
| MHT-X 10160 ST3A                           | -                | X                        |
| MHT-X 10200 ST3A                           | -                | X                        |
| MRT 1645 75                                | -                | X                        |
| MRT 1645 115                               | -                | X                        |
| MRT 1845 75                                | -                | X                        |
| MRT 1845 115                               | -                | X                        |
| MRT 2145 115                               | -                | X                        |
| MRT 2260                                   | -                | X                        |
| MRT 2260 e                                 | -                | X                        |
| MRT 2545 115                               | -                | X                        |
| MRT 2570                                   | -                | X                        |
| MRT 2660                                   | -                | X                        |
| MRT 2660 e                                 | -                | X                        |
| MRT 3060                                   | -                | X                        |
| MRT 3570                                   | -                | X                        |
| MRT 3570 ES                                | -                | X                        |
| MRT-X 1645                                 | -                | X                        |
| MRT-X 1845                                 | -                | X                        |
| MRT-X 2145                                 | -                | X                        |
| MRT-X 2260                                 | -                | X                        |
| MRT-X 2545                                 | -                | X                        |
| MRT-X 2570                                 | -                | X                        |
| MRT-X 2660                                 | -                | X                        |
| MRT-X 3060                                 | -                | X                        |
| MRT-X 3570                                 | -                | X                        |
| MRT-X 3570 ES                              | -                | X                        |
| MHT 790 <span>OLD</span>                   | X                | X                        |
| MHT-X 790 <span>OLD</span>                 | -                | X                        |
| MRT 1440 Easy T4 S2 400° <span>OLD</span>  | X                | -                        |
| MRT 1640 Easy T4 S2 360° <span>OLD</span>  | X                | -                        |
| MRT 1640 Easy T4 S2 400° <span>OLD</span>  | X                | -                        |
| MRT 1840 Easy T4 S2 360° <span>OLD</span>  | X                | -                        |
| MRT 1840 Easy T4 S2 400° <span>OLD</span>  | X                | -                        |
| MRT 2145 Easy 3B S2 400° <span>OLD</span>  | X                | -                        |
| MRT 2145 Easy T4 S2 360° <span>OLD</span>  | X                | -                        |
| MRT 2145 Easy T4 S2 400° <span>OLD</span>  | X                | -                        |
| MRT 2150 Privilege Plus <span>OLD</span>   | X                | -                        |
| MRT 2470 Privilege Plus <span>OLD</span>   | X                | -                        |
| MRT 2545 Easy T4 S2 360° <span>OLD</span>  | X                | -                        |
| MRT 2545 Easy T4 S2 400° <span>OLD</span>  | X                | -                        |
| MRT 2550 Privilege Plus <span>OLD</span>   | X                | -                        |
| MRT 3050 Privilege Plus <span>OLD</span>   | X                | -                        |
| MRT-X 1440 Easy 400° <span>OLD</span>      | X                | -                        |
| MRT-X 1640 Easy 360° <span>OLD</span>      | X                | -                        |
| MRT-X 1640 Easy 400° <span>OLD</span>      | X                | -                        |
| MRT-X 1840 Easy 360° <span>OLD</span>      | X                | -                        |
| MRT-X 1840 Easy 400° <span>OLD</span>      | X                | -                        |
| MRT-X 2145 Easy 360° <span>OLD</span>      | X                | -                        |
| MRT-X 2145 Easy 400° <span>OLD</span>      | X                | -                        |
| MRT-X 2150 Privilege Plus <span>OLD</span> | X                | -                        |
| MRT-X 2470 Privilege Plus <span>OLD</span> | X                | -                        |
| MRT-X 2545 Easy 360° <span>OLD</span>      | X                | -                        |
| MRT-X 2545 Easy 400° <span>OLD</span>      | X                | -                        |
| MRT-X 2550 Privilege Plus <span>OLD</span> | X                | -                        |

|                                            |                  |                          |
|--------------------------------------------|------------------|--------------------------|
| Machines compatibility                     | GALLERY PLATFORM | PST 1800 / 1000 3P FOPS1 |
| MRT-X 3050 Privilege Plus <span>OLD</span> | X                | -                        |

| TABLE SYMBOL                                                                      |                            |                                                                                   |                         |                                                                                     |                                               |
|-----------------------------------------------------------------------------------|----------------------------|-----------------------------------------------------------------------------------|-------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------|
|  | No predisposition required |  | Hydraulic line          |  | Return piping to hydraulic oil tank           |
|  | Electric predisposition    |  | Platform predisposition |  | Tyre handler, cylinder handler predisposition |



**Head Office**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes