

Scheda tecnica :

120 SE S3




 **MANITOU**
HANDLING YOUR WORLD

| Capacities | | Metrico |
|--|---------|--|
| Working height | h21 | 11.78 m |
| Working height maximum (indoor) | h21 | 11.78 m |
| Working height maximum (outdoor) | h21' | 8.71 m |
| Platform height maximum (indoor) | h7 | 9.78 m |
| Platform height maximum (outdoor) | h7' | 6.71 m |
| Platform capacity | Q | 318 kg |
| Max. capacity on the extension deck | | 113 kg |
| Number of people (indoor / outdoor) | | 2 / 1 |
| Weight and dimensions | | |
| Platform weight* | | 2367 kg |
| Platform dimensions (length x width) | lp / ep | 2.26 m x 1.16 m |
| Platform dimensions with extension (length x width) | | 3.18 m x 1.16 m |
| Overall length | l1 | 2.44 m |
| Overall width | b1 | 1.18 m |
| Overall height | h17 | 2.43 m |
| Overall height (stowed) | h18 *** | 1.82 m |
| Internal turning radius / External turning radius | Wa3 | 0 mm/2.29 m |
| Ground clearance with pothole guards deployed | m6 | 0.02 m |
| Ground clearance with pothole guards folded | m2 | 0.12 m |
| Ground clearance at centre of wheelbase | m2 | 0.12 m |
| Wheelbase | y | 1.85 m |
| Performances | | |
| Drive speed - stowed | | 4 km/h |
| Drive speed - raised | | 0.80 km/h |
| Raise speed (laden) / Lower speed (laden) | | 53 s / 34 s |
| Gradeability | | 25 % |
| Indoor and outdoor max Tilt Rating (Fore and Aft / Side-to-Side) | | 3 ° / 1.50 ° |
| Wheels | | |
| Tires type | | Non marking |
| Standard tires | | 380 x 130 mm |
| Drive wheels (front / rear) | | 2 / 0 |
| Steering wheels (front / rear) | | 2 / 0 |
| Braking wheels (front / rear) | | 2 / 0 |
| Engine/Battery | | |
| Battery voltage | | 6 V |
| Battery capacity | | 225 Ah |
| Battery energy | | 5 kWh |
| On-board charger (V / A) | | 24 V / 20 A |
| Miscellaneous | | |
| Ground Pressure | | 10.26 dan/cm2 |
| Hydraulic tank capacity | | 15.10 l |
| Noise to environment (LwA) | | < 70 dB |
| Vibration on hands/arms | | < 0.50 m/s ² |
| Standards compliance | | |
| This machine is in compliance with: | | European directives: 2006/42/EC- Machinery (revised EN280:2013) - 2004/108/EC (EMC) - 2006/95/EC (Low voltage) |

*Varies according to options and standards of the country to which the machine is delivered

120 SE S3 - Diagramma di carico

Load Chart metric

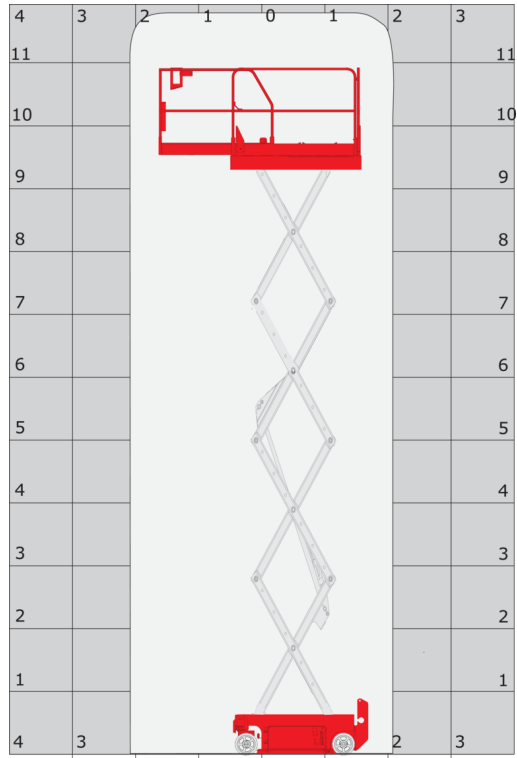

120 SE S3 - Disegno quotato



Allestimento

Standard

2 flashing LED beacons

2 swing out component trays (hydraulic/electric)

220V predisposition in the platform

Anti-slip platform surface

Audible alarm and illuminated indicator lamp (leveling, overload, lowering)

Battery charge indicator lamp

CAN bus technology

Descent alarm

Emergency stop

Emergency stop button in platform and on frame

Folding rails

Hom in the platform

Hour meter

Integrated diagnostic assistance

Load management according to environment (indoor/outdoor)

Manual emergency lowering

Multi-voltage integrated charger

Non-marking rubber tyres

Platform access gate

Pothole protection with automatic operation

Side and rear forklift pockets

Opzionale

Biodegradable oil

Cold weather protection oil

Safety harness



 **MANITOU**
HANDLING YOUR WORLD

Sede centrale

MANITOU ITALIA Srl

Via Cristoforo Colombo 2, Loc. Cavazzona - 41013 CASTELFRANCO EMILIA (MO)

Tel: 059.95.98.11 - Fax 059.95.98.65

www.manitou.com



Questa pubblicazione presenta la descrizione delle versioni e delle possibilità di configurazione dei prodotti Manitou, che possono differire per attrezzature. Gli allestimenti presentati nel presente opuscolo possono essere di serie, optional o non disponibili, a seconda delle versioni. Manitou si riserva il diritto di modificare, in qualsiasi momento e senza alcun preavviso, le specifiche tecniche descritte e rappresentate. Le specifiche indicate non rappresentano alcun obbligo per il costruttore. Per maggiori dettagli, rivolgersi al proprio concessionario Manitou. Documento non contrattuale. Elenco delle specifiche non esaustivo. I loghi nonché l'identità visiva dell'azienda sono di proprietà di Manitou e non possono essere utilizzati senza autorizzazione. Tutti i diritti riservati. Le immagini e gli schemi contenuti nel presente opuscolo sono forniti esclusivamente a fini di consultazione e a titolo indicativo.

Manitou BF SA - Società anonima con consiglio di amministrazione. Capitale sociale: 39,668,399 euro - 857 802 508 RCS Nantes