


R190 GEN:2

SKID LOADERS



GEHL®

Kapazität		Metrisch
Operating Capacity At 50% Tipping Load		861.82 kg
Operating Weight		3172.87 kg
Gewicht und Abmessungen		
Overall Operating Height - Fully Raised	h27	3886.20 mm
Höhe bis Schaufeldrehpunkt – bei max. Hubhöhe	h28	3022.60 mm
Overall Height to top of ROPS	h17	1955.80 mm
Auskippwinkel bei voller Hubhöhe	a5	38 °
Dump height	h29	2387.60 mm
Overall length with bucket	l16	3251.20 mm
Dump reach - Full height	r6	584.20 mm
Einkippwinkel auf Standebene	a13	28 °
Rückrollwinkel bei voller Hubhöhe	a4	99 °
Seat to ground height	h30	904.24 mm
Radstand	y	1066.80 mm
Overall width less bucket	b1	1574.80 mm
Schaufelbreite	e1	1676.40 mm
Bodenfreiheit der Maschine	m4	160.02 mm
Overall length - Less Bucket	l2	2446.02 mm
Clearance Radius - Front with Bucket	b18	2032 mm
Wendekreis - vorne ohne Schaufel	b19	1168.40 mm
Clearance Circle - Rear	wa1	1511.30 mm
Leistung		
Travel Speed with Two-Speed Option - Maximum		19.47 km/h
Fahrtgeschwindigkeit (unbeladen)		12.55 km/h
Reifen		
Standard tires		10 x 16.5
Motor		
Marke		Yanmar
Motor Modell		4TNV98C-NMS2V
Motornorm		Stage IIIB, Stage V, Stage IV / Tier 4 Final
Gross Power		51.67 kW
Net Power		51 kW
Max. Drehmoment / Motordrehzahl		241 Nm / 1625 rpm
Antriebsart		Diesel
Nennleistung Verbrennungsmotor		69.30 Hp
Batterie		12 V
Starter		3 kW
Hydraulisch		
Zusatzhydraulik		70.78 l/min
Auxiliary Hydraulic Pressure		207 bar
High-Flow Auxiliary Hydraulics – Option		113.94 l/min
High-Flow Auxiliary Hydraulics Pressure – Option		200 bar
Tankkapazität		
Kapazität des Kraftstoffbehälters		58.67 l
Kapazität des Hydraulikölbehälters		35.96 l
Lärm und Vibrationen		
Umgebungsgeräusch (LwA)		100 dB
Ganzkörper Schwingungen (ISO 2631 - 1)		0.96 m/s ²
Vibrationswert an Händen/Armen		< 1.53 m/s ²

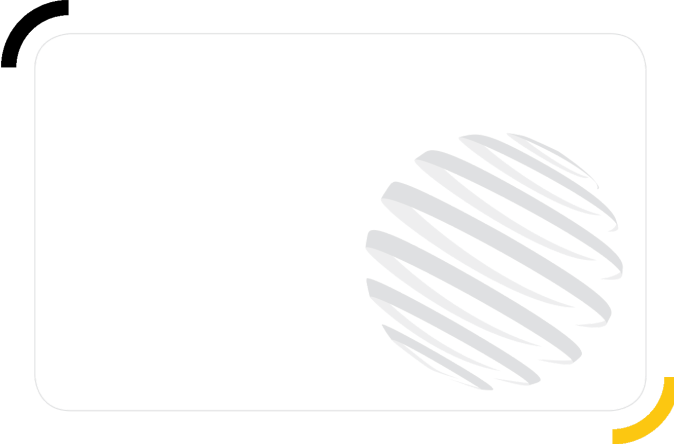

GEHL®

Siège Social
P.O. Box 179 - One Gehl Way - West Bend, WI, USA 53095
Tel: (262) 334-9461 - Fax: (262) 338-7517
www.gehl.com



This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend