
R190 GEN•2

SKID LOADERS





		R 190 GEN:2 Crea	ted on 14 May 2024 at 16.55.25 U
partner weight of we	Capacities		Metric
right addimensionsImage NoteImage NoteNexall operating trephen Fully RaisedN2738.82.00 mmNexall Height to top of ROPSN28302.20 mmump natiget full height833.83 mump natiget full height833.83 mump natiget full height1862.321.20 mmump natiget full height1862.321.20 mmump natiget full height1862.321.20 mmump natiget full height1833.83 mmump natiget full height333.83 mmump natiget full height1849.92 mmstot to ground height1833.93 mmverall order huid height1849.92 mmverall width his backet1849.92 mmverall order huid height18419.50 mmverall ength - tess Bucket181197.60 mmverall ength - tess Bucket181197.60 mmverall ength - tess Bucket1812.244.00 mmverall ength - tess Bucket1812.244.00 mmverall ength - tess Bucket1813.133 mmverall ength - tess Bucket19.97 km/hverall ength - tess Bucket19.97	perating Capacity At 50% Tipping Load		861.82 kg
varial operating height - fully Baiaedbis3886.20 mmunp angig thy this bot of ROPSh179555.80 mmunp angig this to top of ROPSh179555.80 mmunp angig the full heighth292836.00 mmunp angit full heighth292836.00 mmoutp reach full heighth292836.00 mmoutp reach full heighta499°outp reach full heighta499°outp reach full heightb1757.80 mmoutp reach full heightb1757.80 m	perating Weight		3172.87 kg
bight to top of ROPSbase3202.00 mmweadl height to top of ROPS8538°ump nage at ful height8538°ump height to top of ROPS1663232.00 mCweadl height to top of ROPS1663232.00 mCump nage at ful height1663232.00 mCump nage at ful heighta1338°oilback at ground heighta1338°oilback at ground heighta1338°oilback at ground height3090.24 cmweadl whight heis bucketb10157.80 mmverail whight heis bucketb11157.80 mmweadl whight heis bucketb12246.00 mLweadl whight heis bucketb13203.20 mLweadl whight heis bucketb14157.80 mLweadl whight heis bucketb182032.00 mLweadl whight heis bucketb182032.00 mLweadl whight how Speed of bion - Maximumb182032.00 mLweadle ged whit how Speed of bion - Maximumweadl161.90 mLwead speed whit how Speed of bion - Maximumweadl161.90 mLwead speed whit how Speed of bion - Maximumweadle161.90 mLwead speed whit how Speed of bion - Maximumweadle161.90 mLwead speed whit how Speed of bion - Maximumweadle161.90 mLwead speed whit how Speed of bion - Maximumweadle161.90 mLwead speed whit how Speed of bion - Maximumweadle161.90 mLwead speed whit how Speed of bion - Maximumweadle161.90 mL	leight and dimensions		
veal leight o top of R0PS in mei upp arge af the leight o top of R0PS in mei upp arge af the leight o top of R0PS in mei upp arge af the leight o top of R0PS in mei upp arge af the leight o top of R0PS in mei upp arge af the leight of R0PS in R0P	verall Operating Height - Fully Raised	h27	3886.20 mm
amp neighth8338*amp heighth83238.60 mmwerall lengh with bucket163251.20 mmamp neich - Full height6163251.20 mmblack at ground height61328.8*att to ground height61399.*heibback at ground height61399.*heibback at ground height61497.*heibback at ground height6141076.40 mmheibback at ground height6141076.40 mmheibback at ground height6141076.40 mmacket Width61224.460 mmacket Width619103.60.20 mmacket Width less bucket61910.85.00.20 mmacance Grick - Fort with blucket61910.85.00.20 mmaerance Grick - Fort with blucket61910.85.00.00 mmaerance Grick - Fort with blucket61910.85.00 mmaerance Grick - Fort with blucket10910.85.00 mmaerance Grick - Fort with blucket10910.85.00 mmaerance Grick - Fort with blucket10910.85.00 mmaerance Grick - Fort with blucket10.9510.95.00 mmaerance Grick - Fort with blucket10.95.00 mm10.95.00 mmaerance Grick - Fort with blucket10.95.0	eight to Hinge Pin – Fully Raised	h28	3022.60 mm
unp height verall ingith with bucketh292.330 /60 mmverall ingith with bucket163.325.20 mmunp nexch - Full height663.925.20 mmoilback at gar of Ulheight649.9*oilback at gar of Ulheight449.9*sat to ground height649.9*headbasey1066.80 mmverall unight less bucketb11574.80 mmuccket Withc11574.80 mmuccket Withb182022 mmacance Radius - Front with Bucketb182022 mmacance Radius - Front with Bucketb19158.40 mmacance Radius - Front with	verall Height to top of ROPS	h17	1955.80 mm
veal lengh wih bucket pri reach -full height bilback at ground height bilback hige it full height bilback at ground height bilback hige it full height bilback at ground height heibase	ump angle at full height	a5	38 °
num prach - Full heightréS84.20 mmSilback Angea Full Heighta428Silback Angea Full Heighta499sat to ground heightb30994.24 mmheibasey0066.80 mmverall witch less bucketb1157.490 mmverall witch less buckete1157.640 mmround clearancem4160.22 mmround clearancem4160.22 mmrearance Raduer Forto with Bucketb182032 mmrearance Raduer Faerwall51130 mmrearance Raduer Faerwall51130 mmrearance Raduer Faerwall10.155 comrearance Raduer Faerforto10.155 comregine roadueforto10.155 comregine roadue<	ump height	h29	2387.60 mm
allack argoundal328°alback Ange at Full Height13099°alback Ange at Full Height13099°*alback Ange at Full Height13099°*a to ground height130900-24 nmheidbasebl1574.89 nmacket Width611574.89 nmacket Width611574.89 nmacket Width61156.02 nmacket Width122044.602 nmacket Width1582032 nmacance Circle - Rear1582032 nmacance Circle - Rear158158.40 nmacance Circle - Rear158158.40 nmacance Circle - Rear158158.40 nmacance Circle - Rear158158.40 nmacance Circle - Rear158100.16.5andra Circle - Rear158100.16.5andra Circle - Rear158100.16.5andra Circle - Rear158100.16.5andra Circle - Rear158158.40 nmandra Circle - Rear158158.40 nmandra Circle - Rear158158.40 nmandra Circle - Rear158.40 nm158.40 nm<	verall length with bucket	l16	3251.20 mm
Add4499°sta to ground heighth3090×24 mmhelbaseh3090×24 mmhelbasey01066.00 mmverall width less bucketb11574.80 mmucket Widthet1876.40 mmound clearancem4100.02 mmverall width less bucketb182032 mmarance Radius Front with Bucketb182032 mmarance Radius Front with Bucketb191184.40 mmarance Gride - Front with Bucket125.51 km/tharander Gride - Staget With Troo-Speed Dytion - Maximum125.51 km/tharander Gride - Staget With Troo-Speed Dytion - Maximum125.51 km/tharander Gride - Staget With Troo-Speed Dytion - Maximum125.51 km/tharander Gride - Gr	ump reach - Full height	r6	584.20 mm
at to ground heighth30904.24 mmheibbaseb1157.480 nmheibbaseb1157.480 nmucket Withhe1157.480 nmucket Withhe1157.480 nmucket Withhe1157.480 nmucket Withhb132022 nmsearance facture - Front with bucketb132022 nmsearance facture - Front with bucketb132022 nmsearance facture - Front with bucketb132022 nmavel Speed with Two-Speed Option - Maximumwa1151.30 nmavel Speed with Two-Speed Option - Maximumwa1151.30 nmavel Speed with Two-Speed Option - Maximumwa119.47 km /havel Speed (unladen)wa119.47 km /havel Speed (unladen)wa119.47 km /hseringe formanceswa119.47 km /hseringe formancewa119.47 kmseringe formancewa119.47 kmseringe formancewa119.	ollback at ground	a13	28 °
heebasey9068.80 mmverall with less bucketb1157.480 mmverall with less bucket161157.480 mmvound clarancem4160.02 mmvound clarancem4160.02 mmverall length - tess Bucketb182032 mmverallength - tess Bucketb182032 mmverance Cricte - Front with Bucketb182032 mmaerance Cricte - Front with Bucketb191168.40 mmaerance Cricte - Rearw18513.00 mmareance Cricte - Rearw1819.47 km/havel speed (intalden)-2.55 km/hbeds10.4510.45.5tigne DradI10.46.5tigne nordI10.46.5ugine nordI10.46.5ugine nordI10.46.5ugine nordI5.167 kWsx. torque / Engine rotationI10.46.5ter wer sourceI10.46.5ter wer sourceI10.46.5 <td>ollback Angle at Full Height</td> <td>a4</td> <td>99 °</td>	ollback Angle at Full Height	a4	99 °
verail width tess bucket11574.80 mmucket Widthet1576.40 mmverail engen122446.02 mmverail engen122446.02 mmverail engen122446.02 mmverail engen122446.02 mmverail engen182032 mmearance ficel - Front without Bucket182032 mmearance ficel - Front without Bucket191848.40 mmearance ficel - Front without Bucket191848.40 mmearance ficel - Front without Bucket1019avel Speed (unladen)1151.30 mmavel Speed (unladen)119.47 km /havel Speed (unladen)119.47 km /havel Speed (unladen)119.47 km /hsigne brain functions110 x 16.5signe nodel110 x 16.5signe nodel1 <td< td=""><td>eat to ground height</td><td>h30</td><td>904.24 mm</td></td<>	eat to ground height	h30	904.24 mm
cket Widthe11676.40 mmound clearancem4160.02 mmevalle length - Less Bucket122446.02 mmearance Adius - Front with Bucketb18203.2 mmearance Adius - Front with Bucketb18203.2 mmearance Circle - Front without Bucketb191168.40 mmearance Circle - Rearw1515.10 mmearance Circle - Rearw1515.10 mmearance Circle - Rearw119.97 km/havel Speed (unladen)1019.97 km/havel Speed (unladen)1015.5igine brand1010 x 16.5igine brand1010 x 16.5igine nord10\$15.7 kWigine nord51.6 kW51.6 kWx. torque / Engine rotation51.6 kW51.6 kWx. torque / Engine rotation51.6 kW51.6 kWx. torque / Engine rotation1051.8 kWx. torque / Engine rotation1010.9 kBardard flow - Auxiliay hydraulics1010.2 km/nidiary drautik rybrautics1010.9 km/nidiary drautik rybrautics10.0 km/n10.0 km/nigh-Flow Auxiliay hydraulics - Option10.0 km/n10.0 km/nigh-flow Auxiliay hydraulics - Option </td <td>heelbase</td> <td>У</td> <td>1066.80 mm</td>	heelbase	У	1066.80 mm
ckek Widthef1676.40 mmound clearancem4160.02 mmevalle length - Less Bucket1602032 mmearance Aduis - Front with Bucketb182032 mmearance Cricle - Front with Bucketb182032 mmearance Cricle - Rarb191168.40 mmarance Cricle - Rarw1513.00 mearance Cricle - Rarw1513.00 mavel speed (unden)112.55 km/havel speed (unden)112.55 km/hingine prod110.x 16.5ingine prod110.x 16.5ingine prod110.x 16.5ingine prod1516.Wsops Power Aduit1516.Wat Power1516.Wingine product1516.Wat Power1516.Wingine product1516.Wat Power1516.Wingine product1516.Wat Power1518.Wingine product169.30 Hpingine product12.27 kmingine product12.27 kmingine production12.27 kmingine production12.27 kmingine production113.Wingine production12.27 kmingine production12.27 kmingine production12.27 kmingine production12.27 kmingine production12.27 kmingine production12.2	verall width less bucket		
verail length - Less BucketIz2446.02 mmearance Grice - Front without Bucketb183032 mmearance Grice - Front without Bucketb191168.40 mmearance Grice - Rearwa11511.30 mmerformanceswa11511.30 mmavel speed (unladen)ual speed (unladen)12.55 km/hhede10.47 km/h12.55 km/havel speed (unladen)10.01 k 5.510.01 k 5.5type10.01 k 5.510.01 k 5.5type<	ucket Width	e1	
earance Radius - Front with Bucketb182032 mmearance Circle - Front without Bucketb191118.40 nmearance Circle - Rearwat1511.30 nmenformanceswat19.47 km/havel speed unt Iwo-Speed Option - Maximum12.55 km/havel speed unt Iwo-Speed Option - Maximum12.55 km/havel speed unt Iwo-Speed Option - Maximum12.55 km/hanadat tirs1012.55 km/hinge speed unt Iwo - Speed Option - Maximum12.55 km/hanadat tirs1012.55 km/hinge speed unt Iwo - Speed Option - Maximum12.55 km/hinge speed unt Iwo - Speed Option - Maximum12.55 km/hinge speed unt Iwo - Speed Option - Maximum12.55 km/hinge speed unt Iwo - Speed Option - Maximum12.55 km/hinge speed unt Iwo - Speed Option - Maximum12.55 km/hinge speed unt Iwo - Speed Option - Maximum12.55 km/hinge speed unt Iwo - Speed Option - Maximum12.55 km/hinge speed unt Iwo - Speed Option - Maximum13.54 km/minge speed unt Iwo - Speed Option - Maximum13.54 km/minge speed unt Iwo - Speed Option - Maximum13.54 km/minge speed unt Iwo - Speed Option - Maximum - Speed Option - Maximum13.54 km/minge speed unt Iwo - Speed Option - Maximum - Speed Option - Speed	round clearance	m4	160.02 mm
earance Circle - Front without Bucketb191168.40 mmearance Circle - Rearwa1511.30 mmared Speed Quiton - Maximum1011.30 mmavel Speed (unladen)12.55 km / havel Speed (unladen)12.55 km / hheels10.x 16.5andard tires1010.x 16.5spine brand1010.x 16.5spine brand1010.x 16.5spine brand10.x 16.510.x 16.5spine brand10.x 16.5	verall length - Less Bucket	12	2446.02 mm
earance Gircle - Rear is 1511.30 mm is 1511.		b18	2032 mm
ariomancesImage: Speed Option - MaximumImage: Speed Option - Maximumavel speed (unladen)19.47 km/hheek12.55 km/handard tires10 x 16.5signe brand10 x 16.5signe brand10 x 10 x 16.5uigne model10 x 10 x 16.5signe model10 x 10 x 16.5signe brand10 x 10 x 16.5uigne power10 x 10 x	earance Circle - Front without Bucket	b19	1168.40 mm
avel speed with Two-Speed Option - Maximum 944 km/h avel speed (unladen) 12.55 km /h hesic 10 x 16.5 andard tires 10 x 16.5 righe Drand 10 x 16.5 righe Drand Crand Drand D	earance Circle - Rear	wa1	1511.30 mm
avel speed (unladen)12.55 km/hhese12.55 km/htest speed (unladen)12.55 km/htest speed (unladen)10 x 16.5spine nord10 x 16.5righe model10 x 16.5righer model <th< td=""><td>erformances</td><td></td><td></td></th<>	erformances		
these Image andard tires Image andard tires Image agine brand Yanmar ngine model Image ngine norm Image ross Power Image store Power Image ax. torque / Engine rotation Image ower source Image Lengine power rating Image attery voltage Image andard flow - Auxiliary hydraulics Image suitiary Hydraulics - Option Image igh-Flow Auxiliary Hydraulics Pressure - Option Image let tank Image igh-Flow Auxiliary Hydraulics - Option Image igh-Flow Auxiliary Hydraulics Pressure - Option Image igh-Flow Auxiliary Hydraulics - Option Image igh-Flow Auxiliary Hydraulics Pressure - Option Image igh-Flow Auxiliary Hydraulics - Option Image	avel Speed with Two-Speed Option - Maximum		19.47 km/h
tandard tires10 x 16.5ngine10 x 16.5ngine hord10 x 16.5ngine nordel10 x 16.5ngine nordel10 x 16.5ross Power10 x 16.5ross Power10 x 16.5et Power10 x 16.5ax. torque / Engine rotation10 x 16.7ower source241 Nm / 1625 rpmC. Engine power rating10 x 16.7Attery voltage10 x 16.7tarter10 x 16.7ydraulics10 x 16.7uviliary hydraulics - Option10 x 16.7uviliary hydraulics - Option10 x 16.7uel tank200 baratk capacity10 x 16.7obies and vibration10 x 16.7ydraulic oil tank capacity10 x 16.7obies and vibration10 x 16.7obies and vibration10 x 16.7to be and vibration (ISO 26311)100 x 16.7			12.55 km/h
ngineImageImagengine brandYanmarngine modelYanmarngine modelYanmarngine normStage IIIB, Stage V, Yier A Finalross PowerStage IIIB, Stage V, Yier A Finalet PowerStage IIIB, Stage V, Yier A Finalax. torque / Engine rotationStage IIIB, Stage V, Yier A Finalower source241 Nm / 1625 rpmC. Engine power ratingStage III A Capacityattery voltage900 Hpattery voltage12 Vtarter3 kWydraulicsStage III A Capacityuxiliary Hydraulics Porsure - Option207 barank capacities207 barigh-Flow Auxiliary Hydraulics - Option207 barank capacities200 baruel tank58.67 lydraulic oil tank capacity35.96 loise and wibration100 dBwho show yibration (ISO 2631-f)0.96 m/s²	Theels		
Type ipine brandYanmarrgine model47MV98C-NMS2Vrgine norm518ge IIIB, Stage IV, Stage IV / Tier 4 Finalross Power518ge IIIB, Stage V, Stage IV / Tier 4 Finalross Power518 Wax. torque / Engine rotation241 Nm / 1625 rpmower source241 Nm / 1625 rpmc. Engine power rating241 Nm / 1625 rpmattery voltage69.30 Hpattery voltage12 Varter3 kWydraulics3 kWrogine Power Auxiliary hydraulics - Option200 Darspif-Flow Auxiliary Hydraulics - Option35.667 lspif-flow Auxiliary Hydraulics - Option35.96 lspif and withardion55.67 lspif and withardion55.67 lspif and withardion500 dBspif and withardion100 dBspif and withardion (ISO 2631-I)0.96 m/s ²	andard tires		10 x 16.5
gine model 4TNV98C-NMS2V agine norm Stage IIIB, Stage V, Stage IV / Tier 4 Final coss Power 51.67 kW at Power S1.67 kW ax. torque / Engine rotation 241 Nm / 1625 rpm bwer source Diesel C. Engine power rating 69.30 Hp attery voltage 69.30 Hp attery voltage 3 kW arter 3 kW ydraulic Pressure 207 bar gh-Flow Auxiliary Hydraulics - Option 200 bar gh-Flow Auxiliary Hydraulics - Option 200 bar ank capacities 35.96 I gh-flow Auxiliary Hydraulics - Option 35.96 I ogise and vibration 55.96 I bise to environment (LwA) 55.96 I bise to environment (LwA) 0.96 m/s ²	igine		
Origin enormStage IIIB, Stage IV, Yiter 4 Finalross Power51.67 kWet Power51.67 kWax, torqu / Engine rotation241 Nm / 1625 rpmbower source69.30 HpEngine power rating69.30 Hpattery voltage12 Vattery voltage12 Vandard flow - Auxiliary hydraulics70.78 l/minuyliary Hydraulics - Option207 bargh-Flow Auxiliary Hydraulics - Option207 barank capacities207 barank capacities200 barigh-Flow Auxiliary Hydraulics - Option13.9.4 l/mingh-flow Auxiliary Hydraulics Pressure - Option200 barank capacities200 barigh en divbration58.67 ligh en divbration58.67 loise and vibration100 dBbise to environment (LwA)0.96 m/s²	ngine brand		Yanmar
ross Power ter Power et Power ax. torque / Engine rotation ower source C. Engine power rating attery voltage tarter voltage tarter ydraulics tarter ydraulics - Option igh-Flow Auxiliary Hydraulics - Option igh-Flow Auxiliary Hydraulics - Option igh-Flow Auxiliary Hydraulics - Option ank capacities igh-flow Auxiliary Hydraulics Pressure - Option ank capacities iel tank ydraulic oil tank capacity oise to environment (LwA) thole-Body Vibration (ISO 2631-1) C. Engine D. Start C. Engine D. Start	ngine model		4TNV98C-NMS2V
et Power source Engine rotation 241 Nm / 1625 rpm 241 Nm / 1625 rp	ngine norm		Stage IIIB, Stage V, Stage IV / Tier 4 Final
ax. torque / Engine rotation 241 Nm / 1625 rpm 269.30 Hp 269.30 Hp 269.30 Hp 270.30	ross Power		51.67 kW
wer source 69.30 Hp Engine power rating 69.30 Hp attery voltage 69.30 Hp 12 V arter 3 kW draulics 3 kW draulics 0 100 K andard flow - Auxiliary hydraulics andard flow - Auxiliary hydraulics andard flow - Auxiliary hydraulics andard flow - Auxiliary hydraulics 0 ption 2007 bar gh-Flow Auxiliary Hydraulics - Option 2007 bar gh-Flow Auxiliary Hydraulics Pressure - Option 2000 bar nk capacities 2000 bar nk capacities 2000 bar nk capacity 35.96 l bise to environment (LwA) 600 dB hole-Body Vibration (ISO 2631-1)	et Power		51 kW
E. Engine power rating69.30 Hpattery voltage12 Vattery voltage3 kWydraulics0ydraulics0ydraulics70.78 l/minuxiliary Hydraulics - Option207 barank capacities200 barank capacities200 barydraulic oil tank capacity58.67 loise not vibration35.96 loise to environment (LwA)100 dBthe Body Vibration (ISO 2631-1)0.96 m/s²	ax. torque / Engine rotation		241 Nm / 1625 rpm
attery voltage 12 V tarter 3 kW ydraulics 13 kW ydraulics 10 10 10 10 10 10 10 10 10 10 10 10 10	ower source		Diesel
attery voltage 12 V tarter 3 kW ydraulics 3 kW ydraulics 4 Auxiliary hydraulics 10 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	C. Engine power rating		69.30 Hp
ydraulicsImage: constraint of the second			
andard flow - Auxiliary hydraulics 70.78 l/min uxiliary Hydraulic Pressure 207 bar igh-Flow Auxiliary Hydraulics - Option 113.94 l/min igh-Flow Auxiliary Hydraulics Pressure - Option 200 bar ank capacities 200 bar uel tank 58.67 l ydraulic oil tank capacity 35.96 l oise and vibration 100 dB oise to environment (LwA) 0.96 m/s ²	arter		3 kW
uxiliary Hydraulic Pressure 207 bar igh-Flow Auxiliary Hydraulics - Option 200 bar igh-Flow Auxiliary Hydraulics Pressure - Option 200 bar igh-Flow Auxiliary Hydraulics Pressure - Option 200 bar igh capacities 35.96 l igh capacities 0.96 m/s²	ydraulics		
uxiliary Hydraulic Pressure207 barigh-Flow Auxiliary Hydraulics - Option113.94 l/minigh-Flow Auxiliary Hydraulics Pressure - Option200 barank capacities200 baruel tank58.67 lydraulic oil tank capacity35.96 loise and vibration0oise to environment (LwA)100 dBthe Body Vibration (ISO 2631-1)0.96 m/s²	andard flow - Auxiliary hydraulics		70.78 l/min
gh-Flow Auxiliary Hydraulics - Option 113.94 l/min gh-Flow Auxiliary Hydraulics Pressure - Option 200 bar ank capacities 100 dB uel tank 58.67 l ydraulic oil tank capacity 35.96 l bise to environment (LwA) 100 dB hole-Body Vibration (ISO 2631-1) 0.96 m/s ²			207 bar
gh-Flow Auxiliary Hydraulics Pressure – Option 200 bar ank capacities 200 bar uel tank 58.67 l ydraulic oil tank capacity 35.96 l bise and vibration 0 bise to environment (LwA) 100 dB hole-Body Vibration (ISO 2631-1) 0.96 m/s ²			
ink capacities 58.67 l iel tank 58.67 l ydraulic oil tank capacity 35.96 l bise and vibration 0 bise to environment (LwA) 100 dB hole-Body Vibration (ISO 2631-1) 0.96 m/s ²			
uel tank 58.67 l ydraulic oil tank capacity 35.96 l oise and vibration 0 oise to environment (LwA) 100 dB 'hole-Body Vibration (ISO 2631-1) 0.96 m/s ²			
ydraulic oil tank capacity 35.96 l oise and vibration 100 dB oise to environment (LwA) 0.96 m/s²	•		58.67 l
oise and vibration oise to environment (LwA) /hole-Body Vibration (ISO 2631-1) 0.96 m/s ²			
oise to environment (LwA) 100 dB Ihole-Body Vibration (ISO 2631-1) 0.96 m/s ²			
hole-Body Vibration (ISO 2631-1) 0.96 m/s ²			100 dB

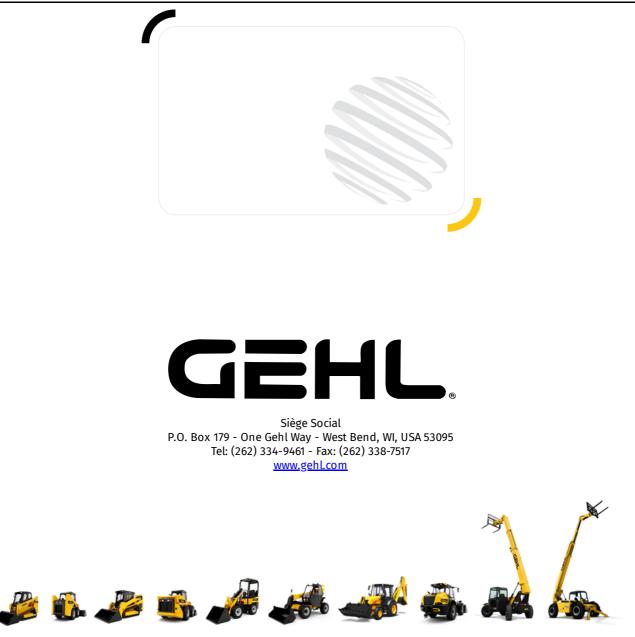

This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend