## R190 GEN•2


## **SKID LOADERS**





## к190 GEN:2 Document créé le 20 mai 2024 à 10:55:33 AM UTC

Capacities		Métrique
perating Capacity At 50% Tipping Load		861.82 kg
perating Weight		3172.87 kg
/eight and dimensions		
verall Operating Height - Fully Raised	h27	3886.20 mm
eight to Hinge Pin – Fully Raised	h28	3022.60 mm
verall Height to top of ROPS	h17	1955.80 mm
ump angle at full height	a5	38 °
ump height	h29	2387.60 mm
verall length with bucket	l16	3251.20 mm
ump reach - Full height	r6	584.20 mm
ollback at ground	a13	28 °
ollback Angle at Full Height	a4	99 °
eat to ground height	h30	904.24 mm
Vheelbase	У	1066.80 mm
verall width less bucket	b1	1574.80 mm
ucket Width	e1	1676.40 mm
iround clearance	m4	160.02 mm
)verall length - Less Bucket	12	2446.02 mm
learance Radius - Front with Bucket	b18	2032 mm
learance Circle - Front without Bucket	b19	1168.40 mm
learance Circle - Rear	wa1	1511.30 mm
Performances		
ravel Speed with Two-Speed Option - Maximum		19.47 km/h
ravel speed (unladen)		12.55 km/h
Vheels		
itandard tires		10 x 16.5
ingine		
ngine brand		Yanmar
ngine model		4TNV98C-NMS2V
ngine norm		Stage IIIB, Stage V, Stage IV / Tier 4 Final
ross Power		51.67 kW
et Power		51 kW
Nax. torque / Engine rotation		241 Nm / 1625 rpm
Power source		Diesel
C. Engine power rating		69.30 Hp
Battery voltage		12 V
itarter		3 kW
lydraulics		
itandard flow - Auxiliary hydraulics		70.78 l/min
uxiliary Hydraulic Pressure		207 bar
ligh-Flow Auxiliary Hydraulics – Option		113.94 l/min
igh-Flow Auxiliary Hydraulics Pressure – Option		200 bar
ank capacities		
uel tank		58.67 l
ydraulic oil tank capacity		35.96 l
loise and vibration		
loise to environment (LwA)		100 dB
Vhole-Body Vibration (ISO 2631-1)		0.96 m/s <sup>2</sup>
/ibration on hands/arms		< 1.53 m/s <sup>2</sup>

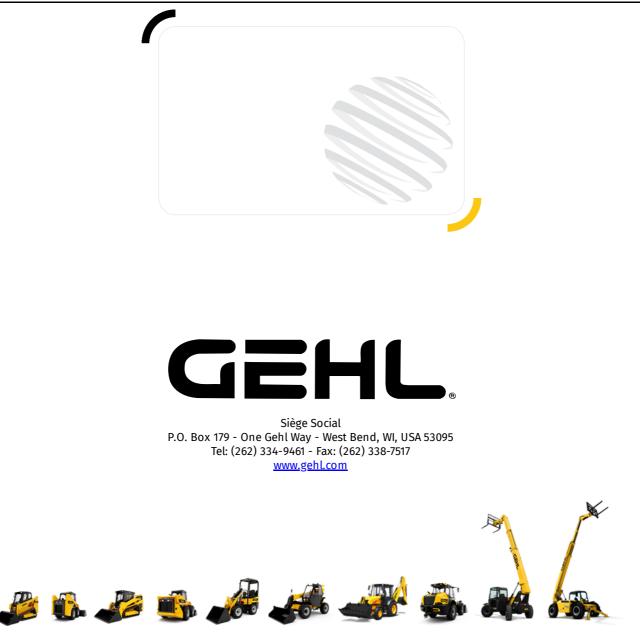

This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend