## V330 GEN-2


## **SKID LOADERS**





/330 GEN:2 Created on May 19, 2024 at 4:58:13 AM UT(	/ 330 G EN:2	Created	on Ma	iy 19	, 2024 at	4:58:13	AM	UT
--	--------------	---------	-------	-------	-----------	---------	----	----

Capacities		Imperial
Rated Operating Capacity		3300 lb
Unladen weight		9090 lb
Weight and dimensions		
Overall Operating Height - Fully Raised	h27	172 in
Height to Hinge Pin – Fully Raised	h28	131 in
Overall Height to top of ROPS	h17	82 in
Dump angle at full height	a5	42 °
Dump height	h29	99 in
Overall length with bucket	l16	153 in
Dump reach - Full height	r6	32 in
Rollback at ground	a13	29 °
Seat to ground height	h30	41 in
Wheelbase	y	49 in
Overall width less bucket	b1	72 in
Bucket Width	e1	74 in
Ground clearance	m4	9 in
Overall length - Less Bucket	114	119 in
Clearance Radius - Front with Bucket	b18	94 in
Clearance Circle - Front with bucket	b 18	56 in
Clearance Circle - Rear	wa1	69 in
Performances	Wal	09 111
Travel Speed with Two-Speed Option - Maximum		12 mph
Travel speed (unladen)		8 mph
Wheels		8 11 11
Standard tires		14.00x17.5 HD
Engine		14.00X 17.5 HD
Engine brand		Yanmar
Engine model		4TNV98CT-CNMS-GB4
Engine norm		GB4
Gross Power		53.70 kW
Net Power		52.70 kW
Max. torque / Engine rotation		217 ft/lbs / 1625 rpm
Power source		Diesel
		12 V
Battery voltage Starter		12 V 3 kW
		3 KW
Hydraulics		2/ 115 mm
Standard flow - Auxiliary hydraulics		24 US gpm
High-Flow Auxiliary Hydraulics – Option		35 US gpm
Tank capacities Fuel tank		2/ 1/5 m
		24 US gal
Hydraulic oil tank capacity		11 US gal
Displacement		0.87 US gal
Noise and vibration		404.15
Noise to environment (LwA)		101 dB
Whole-Body Vibration (ISO 2631-1)		1.07 m/s <sup>2</sup>
Vibration on hands/arms		< 1.50 m/s <sup>2</sup>

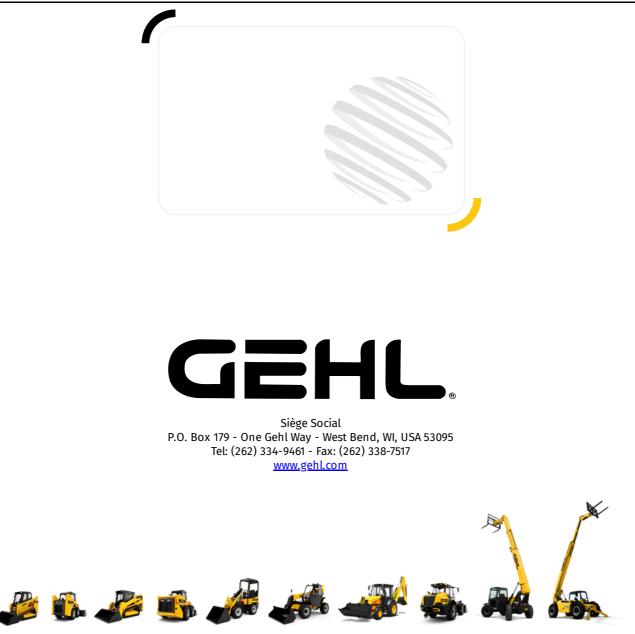

This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend