Technical sheet:


MI 40 D US





		MI 40 D US Clea	ted on November 8, 2025 at 7:41 PM UT
	Technical characteristics		Imperial
1.1	Manufacturer		Manitou
1.2	Model Name		MI 40 D US
1.3	Power source		Diesel
1.4	Operator type		Seated
1.5	Max. capacity	Q	8818 lb
1.6	Load center of gravity	С	20 in
1.8	Load distance, centre of drive axle to fork	x	22 in
1.9	Wheelbase	у	79 in
	Standard mast reference of the machine		FVD 30
	Weight		
2.1	Service weight		13889 lb
2.2	Weight on front axle (laden) / rear axle (laden)		19842 lb / 2866 lb
2.3	Weight on front axle (Unladen) / rear axle (Unladen)		6173 lb / 7716 lb
	Wheels		
3.1	Tires type		Pneumatic
3.2	Dimensions of front wheels		300-15 18PR
3.3	Dimensions of rear wheels		7.00-12-12PR
3.5	Number of front wheels / rear wheels		2 / 2
3.5.2	Number of drive wheels		2
3.6	Front wheel gauge	b10	46 in
3.7	Rear wheel gauge	b11	44 in
	Dimensions		
4.7	Height of overhead guard (cabin)	h6	94 in
4.8	Seat height/stand height	h7	54 in
4.12	Height of towing bar (coupling height)	h10	18 in
4.19	Overall length	I1	169 in
4.20	Length to face of forks	12	121 in
4.21	Overall width	b1	55 in
4.21	Overall width - Single wheels	b1	55 in
4.22	Forks section / width / length	s / e / l	2 in x 5 in x 48 in
4.23	Fork carriage ISO 2328 (class/form) A/B		3A
4.24	Fork carriage width	p3	49 in
4.31	Ground clearance below mast	m1	7 in
4.32	Ground clearance at centre of wheelbase	m2	9 in
4.33	Aisle Width for pallets 1000 x 1200 crossways	Ast	183 in
4.34	Aisle width for 800 x 1200 pallet lengthways	Ast	188 in
4.35	Turning radius	Wa	109 in
4.36	Internal turning radius (over tyres)	b13	5 in
	Performances		
5.1	Travel speed (laden / unladen)		14 mph-15 mph
5.2	Lifting speed (laden / unladen)		2 ft/s-2 ft/s
5.3	Lowering speed (laden / unladen)		2 ft/s-2 ft/s
5.5	Drawbar pull (Laden / Unladen)		4000 daN / 200 daN
5.7	Gradeability (laden / unladen)		31 % / 39 %
5.10	Service brake		Hydraulic
	Transmission type		Torque converter
	Engine		
7.1	Engine brand / model / norm		Cummins / QSF2.8T4F / Tier 4 final
7.2	Engine power (Hp / kW)		75 Hp/55 kW
7.3	Rated speed		2600 rpm
7.4	Number of cylinders / Capacity of cylinders		4 - 171 in³
	Miscellaneous		
8.2	Working hydraulic pressure for attachments		2321 PSI
8.3	Oil flow rate for attachments		24 US gpm
8.4	Measured/guaranteed mean noise level at the ear of the operator		< 84 dB
8.4	Sound level at the driver's ear according to DIN 12 053		84 dB

MI 40 D US - Dimensional drawing

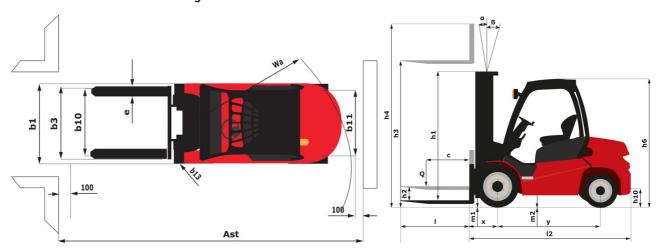

Characteristics of masts and residual capacities

Full Visibility Duplex (FVD)	
α - Mast/fork carriage tilt, forward	۰
β - Mast/fork carriage tilt, backward	۰
h1 - Mast lowered height	in
h2 - Mast free lift	in
h3 - Mast lifting height	in
h4 - Mast extended height	in
Residual capacity at max height	lb
Residual capacity with integrated side shift at max heigth	lb
Height at max capacity	in
Height at max capacity with integrated sideshift	in

FVD 30	FVD 33	FVD 35	FVD 37	FVD 40	FVD 45	FVD 50
6	6	6	6	6	6	6
12	12	12	12	12	12	12
88.4	94.3	98.2	102.2	110	120.9	131.7
6.3	6.3	6.3	6.3	6.3	6.3	6.3
118.1	129.9	137.8	145.7	157.5	177.2	196.9
164.2	176	183.9	191.7	203.5	223.2	242.9
8818	8818	8818	8818	8818	8157	7055
8818	8818	8818	8818	8818	7937	6834
118.1	129.9	137.8	145.7	157.5	157.5	157.5
118.1	129.9	137.8	145.7	157.5	157.5	157.5

Free Lift Duplex (FLD)		FLD 30	FLD 33	FLD 35	FLD 37
α - Mast/fork carriage tilt, forward	٠	6	6	6	6
β - Mast/fork carriage tilt, backward	۰	12	12	12	12
h1 - Mast lowered height	in	87.6	93.5	97.5	101.4
h2 - Mast free lift	in	53.7	59.6	63.5	67.5
h3 - Mast lifting height	in	118.1	129.9	137.8	145.7
h4 - Mast extended height	in	164.2	176	183.9	191.7
Residual capacity at max height	lb	8818	8818	8818	8818
Residual capacity with integrated side shift at max heigth	lb	8818	8818	8818	8818
Height at max capacity	in	118.1	129.9	137.8	145.7
Height at max capacity with integrated sideshift	in	118.1	129.9	137.8	145.7

	FLT 40	FLT 43	FLT 45	FLT 47	FLT 50	FLT 55	FLT 60
۰	6	6	6	6	6	3	3
۰	12	6	6	6	6	6	6
in	81.9	85.8	88.5	90.9	94.9	101.4	109.8
in	48.4	52.3	54.9	57.4	61.4	67.9	76.3
in	157.5	169.3	177.2	185	196.9	216.5	236.2
in	203.5	215.4	223.8	231.1	242.9	262.6	282.7
lb	8818	8598	7716	7275	6834	6173	5071
lb	8598	8378	7496	7055	6614	5952	4850
in	157.5	98.4	157.5	157.5	157.5	98.4	98.4
	in in in Ib	° 6 ° 12 in 81.9 in 48.4 in 157.5 in 203.5 lb 8818 lb 8598	6 6 6 12 6 in 81.9 85.8 in 48.4 52.3 in 157.5 169.3 in 203.5 215.4 lb 8818 8598 lb 8598 8378	° 6 6 6 ° 12 6 6 in 81.9 85.8 88.5 in 48.4 52.3 54.9 in 157.5 169.3 177.2 in 203.5 215.4 223.8 lb 8818 8598 7716 lb 8598 8378 7496	° 6 6 6 6 ° 12 6 6 6 in 81.9 85.8 88.5 90.9 in 48.4 52.3 54.9 57.4 in 157.5 169.3 177.2 185 in 203.5 215.4 223.8 231.1 lb 8818 8598 7716 7275 lb 8598 8378 7496 7055	° 6 6 6 6 6 ° 12 6 6 6 6 in 81.9 85.8 88.5 90.9 94.9 in 48.4 52.3 54.9 57.4 61.4 in 157.5 169.3 177.2 185 196.9 in 203.5 215.4 223.8 231.1 242.9 lb 8818 8598 7716 7275 6834 lb 8598 8378 7496 7055 6614	° 6





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes