

Ficha técnica :

# **MI 70 G FOB**


---



 **MANITOU**  
HANDLING YOUR WORLD

|       | Technical characteristics                                       |           | Métrico                  |
|-------|-----------------------------------------------------------------|-----------|--------------------------|
| 1.1   | Manufacturer                                                    |           | Manitou                  |
| 1.2   | Model Name                                                      |           | MI 70 G FOB              |
| 1.3   | Power source                                                    |           | Lpg                      |
| 1.4   | Operator type                                                   |           | Seated                   |
| 1.5   | Max. capacity                                                   | Q         | 7000 kg                  |
| 1.6   | Load center of gravity                                          | c         | 600 mm                   |
| 1.8   | Load distance, centre of drive axle to fork                     | x         | 603 mm                   |
| 1.9   | Wheelbase                                                       | y         | 2300 mm                  |
|       | Weight                                                          |           |                          |
| 2.1   | Service weight                                                  |           | 9595 kg                  |
| 2.2   | Weight on front axle (laden) / rear axle (laden)                |           | 14830 kg / 1765 kg       |
| 2.3   | Weight on front axle (Unladen) / rear axle (Unladen)            |           | 3910 kg / 5685 kg        |
|       | Wheels                                                          |           |                          |
| 3.1   | Tires type                                                      |           | Pneumatic                |
| 3.2   | Dimensions of front wheels                                      |           | 8.25-15-14PR             |
| 3.3   | Dimensions of rear wheels                                       |           | 8.25-15-14PR             |
| 3.5   | Number of front wheels / rear wheels                            |           | 4 / 2                    |
| 3.5.2 | Number of drive wheels                                          |           | 2                        |
| 3.6   | Front wheel gauge                                               | b10       | 1489 mm                  |
| 3.7   | Rear wheel gauge                                                | b11       | 1700 mm                  |
|       | Dimensions                                                      |           |                          |
| 4.7   | Height of overhead guard (cabin)                                | h6        | 2430 mm                  |
| 4.8   | Seat height/stand height                                        | h7        | 1350 mm                  |
| 4.12  | Height of towing bar (coupling height)                          | h10       | 710 mm                   |
| 4.19  | Overall length                                                  | l1        | 4804 mm                  |
| 4.20  | Length to face of forks                                         | l2        | 3584 mm                  |
| 4.21  | Overall width                                                   | b1        | 1990 mm                  |
| 4.21  | Overall width - Twinned wheels                                  | b1        | 1990 mm                  |
| 4.22  | Forks section / width / length                                  | s / e / l | 65 mm x 150 mm x 1220 mm |
| 4.23  | Fork carriage ISO 2328 (class/form) A/B                         |           | 4A                       |
| 4.24  | Fork carriage width                                             | b3        | 1700 mm                  |
| 4.31  | Ground clearance below mast                                     | m1        | 190 mm                   |
| 4.32  | Ground clearance at centre of wheelbase                         | m2        | 270 mm                   |
| 4.33  | Aisle Width for pallets 1000 x 1200 crossways                   | Ast       | 5262 mm                  |
| 4.34  | Aisle width for 800 x 1200 pallet lengthways                    | Ast       | 5377 mm                  |
| 4.35  | Turning radius                                                  | Wa        | 3330 mm                  |
| 4.36  | Internal turning radius (over tyres)                            | b13       | 1222 mm                  |
|       | Performances                                                    |           |                          |
| 5.1   | Travel speed (laden / unladen)                                  |           | 27 km/h-31 km/h          |
| 5.2   | Lifting speed (laden / unladen)                                 |           | 0.43 m/s-0.46 m/s        |
| 5.3   | Lowering speed (laden / unladen)                                |           | 0.48 m/s-0.42 m/s        |
| 5.5   | Drawbar pull (Laden / Unladen)                                  |           | 5900 daN / 2750 daN      |
| 5.7   | Gradeability (laden)                                            |           | 27 %                     |
| 5.10  | Service brake                                                   |           | Hydraulic                |
|       | Engine                                                          |           |                          |
| 7.1   | Engine brand / model                                            |           | PSI / 4,3L               |
| 7.2   | Engine power according to ISO 1585                              |           | 74 kW                    |
| 7.3   | Rated speed                                                     |           | 2300 rpm                 |
| 7.4   | Number of cylinders / Capacity of cylinders                     |           | 6 - 4300 cm³             |
|       | Miscellaneous                                                   |           |                          |
| 8.2   | Working hydraulic pressure for attachments                      |           | 195 bar                  |
| 8.3   | Oil flow rate for attachments                                   |           | 120 l/min                |
| 8.4   | Measured/guaranteed mean noise level at the ear of the operator |           | < 88 dB                  |
| 8.4   | Sound level at the driver's ear according to DIN 12 053         |           | 88 dB                    |

MI 70 G FOB - Diagrama dimensional

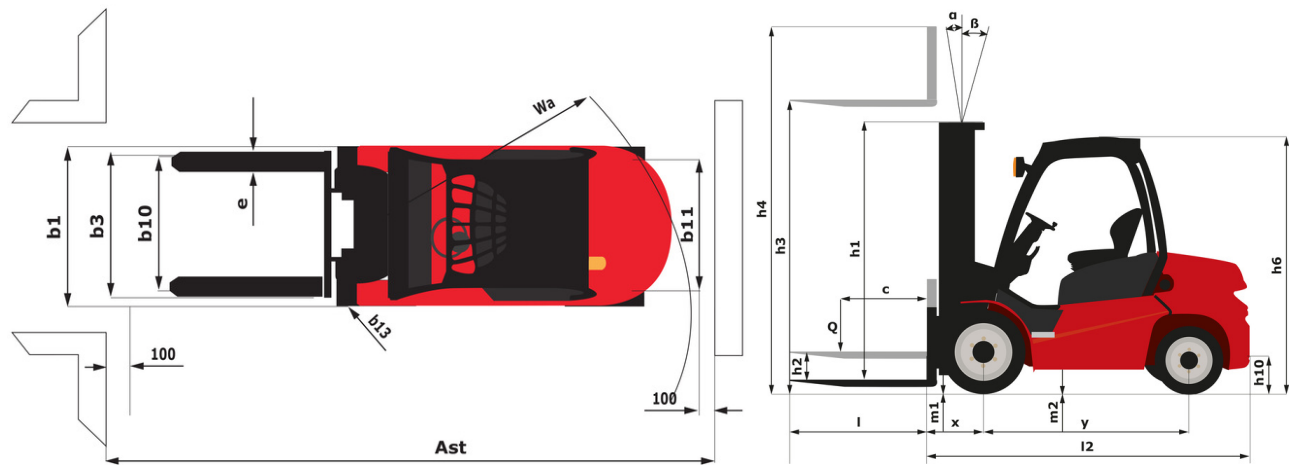

Características de los mástiles y capacidad residual

| Full Visibility Duplex (FVD)                              |    | FVD 30 | FVD 33 | FVD 36 | FVD 40 | FVD 45 | FVD 50 |
|-----------------------------------------------------------|----|--------|--------|--------|--------|--------|--------|
| Mast/fork carriage tilt, forward                          | °  | 6      | 6      | 6      | 6      | 6      | 6      |
| Mast/fork carriage tilt, backward                         | °  | 12     | 12     | 12     | 12     | 6      | 6      |
| h1 - Mast lowered height                                  | mm | 2500   | 2650   | 2800   | 3000   | 3300   | 3550   |
| h2 - Mast free lift                                       | mm | 160    | 160    | 160    | 160    | 160    | 160    |
| h3 - Mast lifting height                                  | mm | 3000   | 3300   | 3600   | 4000   | 4500   | 5000   |
| h4 - Mast extended height                                 | mm | 4167   | 4467   | 4767   | 5167   | 5667   | 6167   |
| Residual capacity at max height                           | kg | 7000   | 7000   | 7000   | 7000   | 7000   | 7000   |
| Residual capacity with hooked-on side shift at max heigth | kg | 6500   | 6500   | 6500   | 6500   | 6500   | 6500   |
| Height at max capacity                                    | mm | 3000   | 3300   | 3600   | 4000   | 4500   | 5000   |
| Height at max capacity with hooked-on sideshift           | mm | 3000   | 3300   | 3600   | 4000   | 4500   | 5000   |

| Free Lift Duplex (FLD)                                    |    | FLD 30 | FLD 33 | FLD 36 | FLD 40 |
|-----------------------------------------------------------|----|--------|--------|--------|--------|
| Mast/fork carriage tilt, forward                          | °  | 6      | 6      | 6      | 6      |
| Mast/fork carriage tilt, backward                         | °  | 12     | 12     | 12     | 12     |
| h1 - Mast lowered height                                  | mm | 2450   | 2600   | 2750   | 2950   |
| h2 - Mast free lift                                       | mm | 1335   | 1485   | 1635   | 1835   |
| h3 - Mast lifting height                                  | mm | 3000   | 3300   | 3600   | 4000   |
| h4 - Mast extended height                                 | mm | 4115   | 4415   | 4715   | 5115   |
| Residual capacity at max height                           | kg | 7000   | 7000   | 7000   | 7000   |
| Residual capacity with hooked-on side shift at max heigth | kg | 6500   | 6500   | 6500   | 6500   |
| Height at max capacity                                    | mm | 3000   | 3300   | 3600   | 4000   |
| Height at max capacity with hooked-on sideshift           | mm | 3000   | 3300   | 3600   | 4000   |

| Free Lift Triplex (FLT)                                   |    | FLT 45 | FLT 48 | FLT 50 | FLT 55 | FLT 60 |
|-----------------------------------------------------------|----|--------|--------|--------|--------|--------|
| Mast/fork carriage tilt, forward                          | °  | 6      | 6      | 6      | 3      | 3      |
| Mast/fork carriage tilt, backward                         | °  | 6      | 6      | 6      | 6      | 6      |
| h1 - Mast lowered height                                  | mm | 2725   | 2825   | 2875   | 3075   | 3225   |
| h2 - Mast free lift                                       | mm | 1500   | 1600   | 1672   | 1800   | 2000   |
| h3 - Mast lifting height                                  | mm | 4500   | 4800   | 5000   | 5500   | 6000   |
| h4 - Mast extended height                                 | mm | 5735   | 6035   | 6213   | 6785   | 7235   |
| Residual capacity at max height                           | kg | 6400   | 6300   | 6300   | 6100   | 5500   |
| Residual capacity with hooked-on side shift at max heigth | kg | 5900   | 5800   | 5800   | 5600   | 5000   |
| Height at max capacity                                    | mm | 4500   | 4800   | 5000   | 5500   | 6000   |
| Height at max capacity with hooked-on sideshift           | mm | 4500   | 4800   | 5000   | 5500   | 6000   |



**Oficina Central**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - Francia

Tel.: 00 33 (0)2 40 09 10 11 - Fax: 00 33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



Esta publicación describe las versiones y posibilidades de configuración de los productos Manitou que puedan diferir en equipamiento. Los equipamientos presentados en este folleto pueden ser de serie, opcionales o no estar disponibles en algunas versiones. Manitou se reserva el derecho, en cualquier momento y sin previo aviso, de modificar las especificaciones descritas y representadas. Las especificaciones aportadas no comprometen al fabricante. Para más información, póngase en contacto con su concesionario Manitou. Documento no contractual. Presentación de los productos no contractual. Lista de especificaciones no exhaustiva. Los logos y la identidad visual de la empresa son propiedad de Manitou y no pueden ser utilizados sin autorización. Todos los derechos reservados. Las fotos y los esquemas contenidos en este folleto se ofrecen para consulta y a título indicativo solamente.

Manitou BF SA - Sociedad anónima con Consejo de Administración - Capital social: 39 668 399 euros - 857 802 508 RCS Nantes