Technical sheet:

MT 625 H





	мт 625 н Created on November 20, 2025 at 6:12	PM UT
Capacities	Imperial	
Max. capacity	5512 lb	
Max. lifting height	19 ft 2 in	
Maximum outreach	11 ft 2 in	
Breakout force with bucket	3427 daN	
Weight and dimensions		
Overall length to carriage	l11 12 ft 7 in	
Length to face of forks	l2 12 ft 10 in	
Overall width	b1 5 ft 11 in	
Overall height	h17 6 ft 4 in	
Wheelbase	y 7 ft 7 in	
Ground clearance	m4 1 ft 1 in	
Overall cab width	b4 2 ft 7 in	
Tilt-up angle	a4 12 °	
Tilt-down angle	a5 117°	
External turning radius (over tyres)	Wa1 10 ft 10 in	
Overall weight	10582 lb	
Tires type	Inflatable	
Standard tires	CAMSO SKS532 12-16.5	
	1 / e / s 47 in x 5 in x 2 in	
Forks length / width / section Performances	1/e/\$ 4/111 x 3 111 x 2 111	
	8 s	
Lifting	5.40 s	
Lowering		
Extension	5.60 s	
Retraction Crowd	4.30 s 3.50 s	
	3.60 s	
Dump Engine	3.00 \$	
Engine brand	Kubota	
Engine norm	Stage V	
Engine model	V3307-CR-TE5B	
Number of cylinders / Capacity of cylinders	4 - 203 in ³	
Engine power (Hp/kW)	75 Hp / 55.40 kW	
Max. torque / Engine rotation	195 ft/lbs @ 1400 rpm	
Drawbar pull (Laden)	3550 daN	
Transmission	3330 daiv	
Transmission type	Hydrostatic	
Number of gears (forward / reverse)	2/2	
Max. travel speed	15 mph	
Max. travel speed (may vary according to applicable regulations)	16 mph	
Parking brake	Automatic negative parking brake	
Service brake	Oil-Immersed multi-discs braking on fron	
Hydraulics	On minicised mand dises blaking on non	tuxies
Hydraulic pump type	Gear pump	
Hydraulic Pressure	3408 PSI	
Tank capacities	3400101	
Engine oil	3 US gal	
Hydraulic oil	30 US gal	
Fuel	17 US gal	
Noise and vibration	17 03 yai	
Noise at driving position (LpA)	76 dB	
Noise to environment (LwA)	104 dB	
Vibration on hands/arms	< 8 ft/s²	
Miscellaneous	. 0103	
Steering wheels (front / rear)	2/2	
Drive wheels (front / rear)	2/2	
Safety / Cab certification	Standard EN 15000 / ROPS - FOPS cab (le	evel 1)
Controls	JSM	,
	33W	

Options / Finishing


S: Standard / O: Optional / -: Not available


Lifting function
Hydraulic line for quick-release attachments
Operator station
12V plug cigarette lighter type
Air suspension fabric seat - GRAMMER
Bluetooth USB radio - With extra microphone - 100W
Bluetooth USB radio - With integrated microphone - 100W
Car radio antenna
Document holder
Floor mat
Inner rear view mirror
Mirror on rear of the machine
Phone support
Rearwiper
Tuner car radio - 50W
Lighting
Beacon
Complete road lighting
Front and rear work lights on cab (x4)
Rear electric plug
Security
Aggravating movements cut off EN 15000
Battery cut-off
Emergency stop button outside the cab
Sun visor on windshield and roof
Pneumatics
CAMSO SKS HAULER 12-16.5

Standard
0
Ü
S
0
0
S/0**
0
0
S
0
\$
0
S
0
S
\$
0
S
S
S
S
0
S

MT 625 H - Dimensional drawing








MT 625 H - Load chart

Machine on tires with forks Imperial

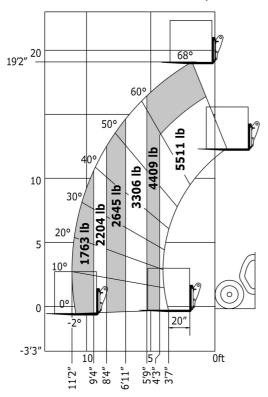





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes