

Scheda tecnica :


M 40-2 D ST5



 **MANITOU**
HANDLING YOUR WORLD

| Technical characteristics | | Metrico | |
|---------------------------|--|-----------|---------------------------|
| 1.1 | Manufacturer | | MANITOU |
| 1.2 | Model Name | | M 40-2 D ST5 |
| 1.3 | Power source | | Diesel |
| 1.4 | Operator type | | Seated |
| 1.5 | Max. capacity | Q | 4000 kg |
| 1.6 | Load center of gravity | c | 500 mm |
| 1.8 | Load distance, centre of drive axle to fork | x | 763 mm |
| 1.9 | Wheelbase | y | 2060 mm |
| Weight | | | |
| 2.1 | Service weight | | 6915 kg |
| 2.2 | Weight on front axle (laden) / rear axle (laden) | | 9075 kg / 1840 kg |
| 2.3 | Weight on front axle (Unladen) / rear axle (Unladen) | | 2625 kg / 4290 kg |
| Wheels | | | |
| 3.1 | Tires type | | Pneumatic |
| 3.2 | Dimensions of front wheels | | 18-19,5 18PR A224 |
| 3.3 | Dimensions of rear wheels | | 10R17,5 G291 GY |
| 3.5 | Number of front wheels / rear wheels | | 2 / 2 |
| 3.5.2 | Number of drive wheels | | 2 |
| 3.6 | Front wheel gauge | b10 | 1600 mm |
| 3.7 | Rear wheel gauge | b11 | 1640 mm |
| Dimensions | | | |
| 4.7 | Height of overhead guard (cabin) / Overall height of low overhead guard (Buggie version) | h6 / h6* | 2440 mm / 2440 mm |
| 4.8 | Seat height/stand height | h7 | 1407 mm |
| 4.19 | Overall length | l1 | 4858 mm |
| 4.20 | Length to face of forks | l2 | 3658 mm |
| 4.21 | Overall width | b1 | 2057 mm |
| 4.22 | Forks section x width x length | s / e / l | 150 mm x 150 mm / 1200 mm |
| 4.23 | Fork carriage ISO 2328 (class/form) A/B | | 3A |
| 4.24 | Fork carriage width | b3 | 1670 mm |
| 4.31 | Ground clearance below mast | m1 | 250 mm |
| 4.32 | Ground clearance at centre of wheelbase | m2 | 377 mm |
| 4.33 | Aisle width for 1000 x 1200 pallet widthways | Ast | 5560 mm |
| 4.34 | Aisle width for 800 x 1200 pallet lengthways | Ast | 5560 mm |
| 4.35 | Turning radius | Wa | 3395 mm |
| Performances | | | |
| 5.1 | Travel speed (laden / unladen) | | 22 km/h / 22 km/h |
| 5.2 | Lifting speed (laden / unladen) | | 0.40 m/s / 0.40 m/s |
| 5.3 | Lowering speed (laden / unladen) | | 0.50 m/s / 0.40 m/s |
| 5.5 | Drawbar pull (Laden) | | 6900 daN |
| 5.10 | Service brake | | Hydraulic |
| Engine | | | |
| 7.2 | I.C. Engine power rating | | 55 kW |
| 7.1 | Engine brand / model / norm | | Deutz / TCD 2,9 / Stage V |
| 7.3 | Rated speed | | 2300 rpm |
| 7.4 | Number of cylinders / Capacity of cylinders | | 4 - 2925 cm ³ |
| Miscellaneous | | | |
| 8.2 | Working hydraulic pressure for attachments | | 210 bar |
| 8.3 | Oil flow rate for attachments | | 97 l/min |
| 8.4 | Sound level at the driver's ear according to DIN 12 053 | | 78 dB |

M 40-2 D ST5 - Disegno quotato

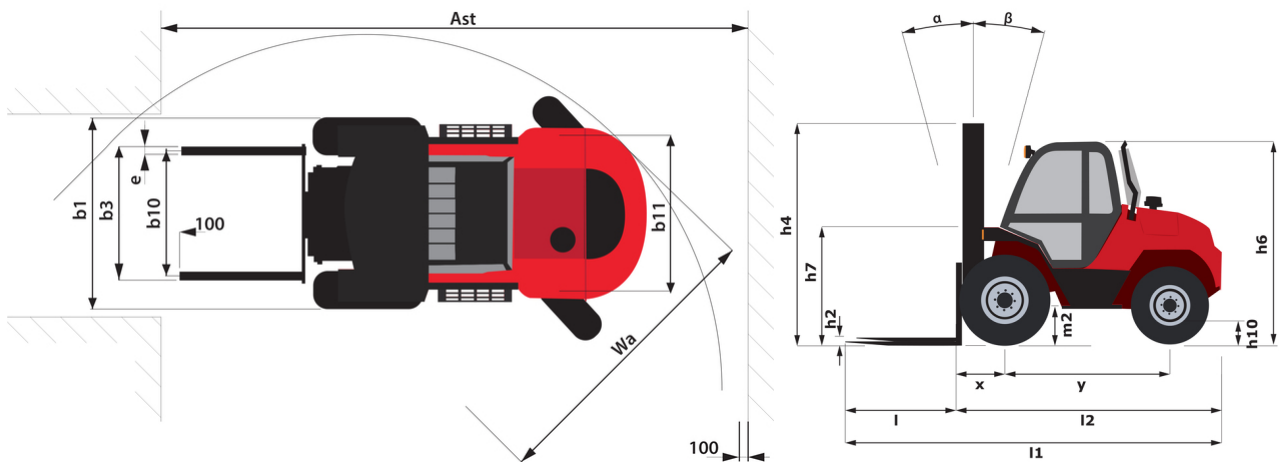

Caratteristiche dei montanti e capacità residue

| Full Visibility Duplex (FVD) | FVD 33 | FVD 35 | FVD 37 | FVD 40 | FVD 45 | FVD 50 |
|---|--------|--------|--------|--------|--------|--------|
| α - Mast/fork carriage tilt, forward | ° | 15 | 15 | 15 | 15 | 15 |
| β - Mast/fork carriage tilt, backward | ° | 15 | 15 | 15 | 15 | 15 |
| h1 - Mast lowered height | mm | 2625 | 2725 | 2825 | 2975 | 3225 |
| h3 - Mast lifting height | mm | 3300 | 3500 | 3700 | 3700 | 3700 |
| Residual capacity at max height | kg | 4000 | 4000 | 4000 | 4000 | 4000 |
| Residual capacity with hooked-on side shift at max height | kg | 4000 | 4000 | 4000 | 4000 | 3900 |
| Height at max capacity | mm | 3300 | 3500 | 3700 | 4000 | 4500 |
| Height at max capacity with hooked-on sideshift | mm | 3300 | 3500 | 3700 | 4000 | 4200 |

| Free Lift Triplex (FLT) | FLT 43 | FLT 45 | FLT 47 | FLT 50 | FLT 55 | FLT 60 |
|---|--------|--------|--------|--------|--------|--------|
| α - Mast/fork carriage tilt, forward | ° | 15 | 15 | 15 | 10 | 10 |
| β - Mast/fork carriage tilt, backward | ° | 15 | 15 | 15 | 15 | 15 |
| h1 - Mast lowered height | mm | 2425 | 2500 | 2560 | 2675 | 2825 |
| h2 - Mast free lift | mm | 1455 | 1530 | 1590 | 1705 | 1855 |
| h3 - Mast lifting height | mm | 4300 | 4500 | 4700 | 5000 | 5500 |
| Residual capacity at max height | kg | 4000 | 4000 | 3000 | | 2500 |
| Residual capacity with hooked-on side shift at max height | kg | | 3650 | 3650 | | 2500 |
| Height at max capacity | mm | 4300 | 4500 | 4200 | 2500 | 4500 |
| Height at max capacity with hooked-on sideshift | mm | | 3500 | 4200 | | 3300 |



 **MANITOU**
HANDLING YOUR WORLD

Sede centrale

MANITOU ITALIA Srl

Via Cristoforo Colombo 2, Loc. Cavazzona - 41013 CASTELFRANCO EMILIA (MO)

Tel: 059.95.98.11 - Fax 059.95.98.65

www.manitou.com



Questa pubblicazione presenta la descrizione delle versioni e delle possibilità di configurazione dei prodotti Manitou, che possono differire per attrezzature. Gli allestimenti presentati nel presente opuscolo possono essere di serie, optional o non disponibili, a seconda delle versioni. Manitou si riserva il diritto di modificare, in qualsiasi momento e senza alcun preavviso, le specifiche tecniche descritte e rappresentate. Le specifiche indicate non rappresentano alcun obbligo per il costruttore. Per maggiori dettagli, rivolgersi al proprio concessionario Manitou. Documento non contrattuale. Elenco delle specifiche non esaustivo. I loghi nonché l'identità visiva dell'azienda sono di proprietà di Manitou e non possono essere utilizzati senza autorizzazione. Tutti i diritti riservati. Le immagini e gli schemi contenuti nel presente opuscolo sono forniti esclusivamente a fini di consultazione e a titolo indicativo.

Manitou BF SA - Società anonima con consiglio di amministrazione. Capitale sociale: 39,668,399 euro - 857 802 508 RCS Nantes