Technical sheet:

MT-X 625 H COMFORT






		MT-X 625 H COMFORT Created on August 1, 2025 at 7:	.39 PM U1
Micrography	Capacities	Metric	
S. 15 m S. 1	Max. capacity		
Sammunewash	Max. lifting height		
\$420 and	Maximum outreach		
Wight and dimensions Image: Problem of the containes of forts or a fire of f			
1			
2 3.90 m		l11 3.83 m	
Part			
New			
Nemblase			
International colorance m4			
Near 1		, ,	
Ill clown angle s s 117			
xiteral aluming radius (over tyres) Wa1 3.31 m test type 48000 kg Pineumatic standard tires 1/e/s 1200 mm x 125 mm x 45 mm efformances 1/e/s 1200 mm x 125 mm x 45 mm efformances 8 8 ownering 5.40 s 5.50 s stension 4.30 s 3.50 s stension 4.30 s 3.50 s stension 8 8 stension 9 3.50 s stension 9 4.333 t m²			
Mean			
Test type			
Incoded lities CAMSO SISSSS 21-16.5 Owks length / width / section 1 / e / s Verforminces 1 / e / s Verforminces 8 s owning 5.40 s stension 5.50 s stension 4.30 s stowed 3.50 s stowed 3.50 s righe 6.00 s language norm 8 kbotos apple norm Stage IIIA dumber of cylinders / Capacity of cylinders 3.50 s C. Engine power entiting - Power 75 kp / S5A di W vas. torque / Engine rotation 25 km / 3			
ock longth / width / section 1 / e / s 1 200 mm x 125 mm x 45			
serformances 8 s ownering 5.40 s stension 5.60 s stension 3.50 s stension 3.50 s stump 3.50 s single 3.50 s single 8.50 c single 6.50 s single norm 8.50 c single per commodel 8.50 c C. Engine power rating - Power 7.50 m C. Engine power rating - Power 2.55 m Sax topus / Engine rotation 2.50 m sax topus / Engine rotation 2.50 m sax topus / Engine rotation 2.50 m sax topus / Engine r			m
### ### ### ### ### ### ### ### ### ##		1/ e / \$ 1200 mm x 125 mm x 45 m	III
oweing 5.40 s xtension 5.60 s tetracion 4.30 s totod 3.50 s sump 3.60 s ingine trad Kubola napine norm Stage IIIA napine norm Stage IIIA nigher power 7.51 p/ 5.54 kW faz. torque / Engine rotation 255 km @ 1400 pm transmission 255 km @ 1400 pm transmission type Hydrostatic tumber of expect (may vay according to applicable regulations) 2 / 2 fax. travel speed (may vay according to applicable regulations) 2 / 2 / 2 fax. travel speed (may vay according to applicable regulations) 2 / 2 / 2 fax. travel speed (may vay according to applicable regulations) 6 / 2 / 2 fax. travel speed (may vay according to applicable regulations) 6 / 2 / 2 fax. travel speed (may vay according to applicable regulations) 6 / 2 / 2 fax. travel speed (may vay according to applicable regulations) 6 / 2 / 2 fax. travel speed (may vay according to applicable regulations) 6 / 2 / 2 fax. travel speed (may vay according to applicable regulations) 6 / 2 / 2 <td></td> <td></td> <td></td>			
extension 5.60 s straction 4.30 s strowd 3.50 s tump 3.60 s angine Center angine brand Stage IIIA nighen mom Stage IIIA nighen model 4.3331 cm² C. Engine power rating - Power 7.5 Hp / 55.40 kW As. torque / Engine rotation 255 km / 1400 pm transmission 3550 dan transmission 1 flumber of gears (forward / reverse) 2,7 2 flux, travel speed 4, 3331 cm² flux, travel speed (may vary according to applicable regulations) 4, 55 km/h arking trake Oll-minersed multi-discs braking on front axles lydraulic 9 lydraulic pump type Gear pump lydraulic pump type Gear pump lydraulic pump type 11.20 I lydraulic pump type 6 loise and dybraulic pump type <t< td=""><td></td><td></td><td></td></t<>			
A			
Strong S			
Suppose Supp			
ngine brand ngine model Authoration ngine model Authoration Ngine model Authoration Au			
Ingline brand Kubota Ingline nom Stage IIIA Ingline model Y3377-D1-FE3B Unimber of cylinders / Capacity of cylinders 4 - 3331 cm³ C. Engine power rating - Power 75 Hp / 55.40 kW Ast. torque / Falpier rotation 265 Nm e Hotor pluon provided		3.60 s	
Ingline norm Stage IIIA Ingline model V3307-DI-FE3B Unumber of cylinders / Capacity of cylinders 4 - 3331 cm² C. Engine power rating - Power 75 Hp / 55.40 kW Ass. torque / Engine rotation 255 Nm @ 1400 rpm transmission 3550 daN transmission type Hydrostatic tumber of gears (forward / reverse) 2 / 2 dax. travel speed 9 Automatic negative parking brake dax. travel speed (may vary according to applicable regulations) 25 km/h dax. travel speed (may vary according to applicable regulations) 25 km/h dax. travel speed (may vary according to applicable regulations) 25 km/h dax. travel speed (may vary according to applicable regulations) 25 km/h dax. travel speed (may vary according to applicable regulations) 25 km/h dax. travel speed (may vary according to applicable regulations) 25 km/h dax. travel speed (may vary according to applicable regulations) 25 km/h dax. travel speed (may vary according to applicable regulations) 25 km/h dax. travel speed (may vary according to applicable regulations) 25 km/h dax. travel speed (may vary according to applicable regula			
Ingline model V3307-DFESB Jumber of Jylinders (Lyjlinders) 4 - 3331 cm³ C. C. Engine power rating - Power 75 Hp. / 55.40 kW Max. torque / Engine rotation 265 Nm @ 1400 rpm transmission 3550 daN transmission type Hydrostatic tumber of gears (forward / reverse) 2 / 2 Max. travel speed (may vary according to applicable regulations) 2 / 2 Max. travel speed (may vary according to applicable regulations) Automatic negative parking brake Viptraulic pump type Gear pump Viptraulic pump type Gear pump Viptraulic plump type Title plump type			
bumber of cylinders / Capacity of cylinders 4 - 3331 cm³ C. Engine power rating - Power 265 km @ 1400 rpm Asax. torque / Engine rotation 265 km @ 1400 rpm transmission 3550 daN transmission bye Hydrostatic tax. travel speed 2 / 2 fax. travel speed (may vary according to applicable regulations) 25 km/h tax king brake Oil-Immersed multi-discs braking on front axles evice brake Oil-Immersed multi-discs braking on front axles bydraulic pump type Gear pump tydraulic pump type Gear pump tydraulic pump type 11.20 l dax tax day type and type a			
C. Engine power rating - Power 75 Hp / 55.40 kW dax. Incept / Engine rotation 265 Nm @ 1400 pm dax. Insulation 3550 daN transmission type Hydrostatic tumber of gears (forward / reverse) 2 / 2 dax. travel speed (may vary according to applicable regulations) 25 km /h dax. travel speed (may vary according to applicable regulations) Automatic negative parking brake device brake Oil-Immersed multi-discs braking on front axles hydraulics Gear pump hydraulic persure 235 bar ank capacities 235 bar loise and vibration 115 l loise and vibration 63 l loise and vibration on hands/arms 2 (2.50 m/s² discellaneous 2 (2.50 m/s² teering wheels (front / rear) 2 (2.2 tarkering front [rear] 2 (2.2 tarkery / Cab certification 5 (2.2 to m/s² - FOPS cab (level 1)			
dax. torque / Engine rotation 265 Nm @ 1400 rpm transmission 3350 daN transmission type Hydrostatic lumber of gears (forward / reverse) 2 / 2 dax. travel speed 25 km/h aciatr, tay speed (any vary according to applicable regulations) 25 km/h aciatr, tay speed (any vary according to applicable regulations) Automatic negative parking brake cervice brake Oil-Immersed multi-discs braking on front axles lydraulic purp type Gear pump lydraulic Pressure 235 bar ank capacities 9 loise and dybation 115 l utel tank 63 l loise and dybation 63 l loise at driving position (LpA) 76 dB loise to environment (LwA) 104 dB fibration on hands/arms < 2.50 m/s²			
Parameter pull (Laden) 3550 daN Transmission Hydrostatic Unumber of gears (forward / reverse) 2, /2 Max. travel speed 24.90 km/h dax. travel speed (may vary according to applicable regulations) 25 km/h darking brake Oil-Immersed multi-discs braking on front axles Hydraulic pump type Gear pump Hydraulic pressure 235 bar Ingine oil 11.20 I Hydraulic oil 11.20 I Ingine oil 11.20 I Ingine oil (loise and riving position (LpA) 6 dB Ioise and riving position (LpA) 7 d dB Ioise to environment (LwA) 104 dB Installation on hands/arms 2,2 discellaneous 12,2 String wheels (front / rear) 2,2 string wheels (front / rear) 2,2 standard En 15000 / ROPS - FOPS cole (level 1)			
Transmission My transmission M			
Internation type Internation type Internation figure of gears (forward / reverse) Internation of gears (forward /		3550 daN	
tumber of gears (forward / reverse) Aax. travel speed Aax. travel speed (may vary according to applicable regulations) Aax. travel speed (may vary according to applicable regulations) Aax. travel speed (may vary according to applicable regulations) Aax. travel speed (may vary according to applicable regulations) Automatic negative parking brake Oil-Immersed multi-discs braking on front axles Vidraulic pump type Qear pump Qear pump Quartic pressure Aax. travel speed (may vary according to applicable regulations) Automatic negative parking brake Oil-Immersed multi-discs braking on front axles Quartic pressure Aax. travel speed (may vary according to applicable regulations) Quartic pressure Antomatic negative parking brake Quartic pressure Automatic negative parking brake Quartic parking brake Quartic parking brake Quartic parking brake Automatic negative parking brake Quartic parking brake Automatic negative parking brake Quartic			
Aax. travel speed 24.90 km/h Aax. travel speed (may vary according to applicable regulations) 25 km/h Adar, travel speed (may vary according to applicable regulations) Automatic negative parking brake verice brake Oil-Immersed multi-discs braking on front axles tydraulic pump type Gear pump tydraulic pressure 235 bar ank capacities 11.20 l ugine oil 11.20 l tydraulic oil 63 l uel tank 63 l toise and vibration 76 dB toise at driving position (LpA) 76 dB toise on environment (LwA) 104 dB vibration on hands/arms < 2.50 m/s²	Transmission type	· · · · · · · · · · · · · · · · · · ·	
Axx. travel speed (may vary according to applicable regulations) Axis travel speed (may vary according to applicable regulations) Axis travel speed (may vary according to applicable regulations) Axis travel speed (may vary according to applicable regulations) Axis travel speed (may vary according to applicable regulations) Axis travel speed (may vary according to applicable regulations) Axis travel speed (may vary according to applicable regulations) Axis travel speed (may vary according to applicable regulations) Axis travel speed (may vary according to applicable regulation parks Garty travel speed (may vary according to applicable regulation parks Garty travel speed (may vary according to applicable regulation parks Gall-Immersed multi-discs braking on front axles Gear pump 235 bar 335 bar 311.20 I 115.1 115.1 115.1 115.1 115.1 116.1 117.1 117.1 118.1 119.1			
Automatic negative parking brake Oil-Immersed multi-discs braking on front axles bydraulics bydraulic pump type Gear pump tydraulic pressure ank capacities ngine oil dydraulic oil dydraulic oil ele tank loise and vibration loise at driving position (LpA) loise to environment (LwA) fibration on hands/arms fibration on hands/arms fibration on hands/arms fibration wheels (front / rear) loive wheels (front / rear) loive wheels (front / rear) lafety / Cab certification Automatic negative parking brake Oil-Immersed multi-discs braking on front axles Oil-Imm	·		
tervice brake tydraulics tydraulic pump type tydraulic pressure ank capacities ngine oil tydraulic plus pub			
Aydraulic pump type Aydraulic pump type Aydraulic Pressure Ank capacities And cap	Parking brake		
dyfarulic pump type Gear pump dyfarulic Pressure 235 bar and capacities 11.20 l dyfarulic oil 115 l duel tank 63 l loise and vibration 63 l loise and driving position (LpA) 76 dB loise to environment (LwA) 104 dB fibration on hands/arms < 2.50 m/s² discellaneous 2 / 2 steering wheels (front / rear) 2 / 2 lafety / Cab certification Standard EN 15000 / ROPS - FOPS cab (level 1)	Service brake	Oil-Immersed multi-discs braking on	front axles
	Hydraulics		
Aink capacities 11.20 I drigine oil 115 I dydraulic oil 63 I duel tank 63 I doise and vibration 56 dB doise at driving position (LpA) 76 dB doise to environment (LwA) 104 dB fibration on hands/arms < 2.50 m/s²	Hydraulic pump type	Gear pump	
11.20 1 15 15 15 15 15 15 15	Hydraulic Pressure	235 bar	
Vigraulic oil 115 15 15 15 15 15 15	Tank capacities		
uel tank 63 I loise and vibration Column of the control of th	Engine oil		
Ioise and vibration 76 dB Ioise at driving position (LpA) 104 dB Ioise to environment (LwA) 104 dB fibration on hands/arms < 2.50 m/s²	Hydraulic oil		
To de B To	Fuel tank	63 I	
Ioise to environment (LwA) 104 dB fibration on hands/arms < 2.50 m/s²	Noise and vibration		
ribration on hands/arms < 2.50 m/s²	Noise at driving position (LpA)		
Affice Il an eous Intering wheels (front / rear)	Noise to environment (LwA)	104 dB	
teering wheels (front / rear) 2 / 2	Vibration on hands/arms	< 2.50 m/s ²	
2 / 2 Standard EN 15000 / ROPS - FOPS cab (level 1)	Miscellaneous		
Standard EN 15000 / ROPS - FOPS cab (level 1)	Steering wheels (front / rear)	2/2	
	Drive wheels (front / rear)	2/2	
Controls	Safety / Cab certification	Standard EN 15000 / ROPS - FOPS ca	ab (level 1)
	Controls	JSM	


MT-X 625 H Comfort - Dimensional drawing





MT-X 625 H Comfort - Load chart

Machine on tires with forks Metric

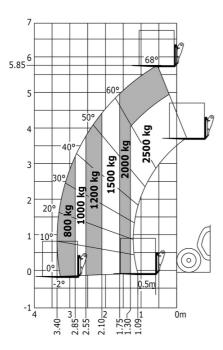

Equipment

Standard	ı
12V plug cigarette lighter type	
Aggravating movements cut off EN 15000	
Battery cut-off	
Beacon	
Bluetooth USB radio - With integrated microphone - 100W	
CAMSO SKS HAULER 12-16.5	
Complete road lighting	
Emergency stop	
Floor mat	
Mirror on rear of the machine	
Rear electric plug	
Rear wiper	

Optional	
Air suspension fabric seat - GRAMMER	
Bluetooth USB radio - With extra microphone - 100W	
Bluetooth USB radio - With integrated microphone - 100W	
Car radio antenna	
Document holder	
Front and rear work lights on cab (x4)	
Hydraulic line for quick-release attachments	
Inner rear view mirror	
Phone support	
Sun visor on windshield and roof	
Tuner car radio - 50W	





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes