Technical sheet:

MT-X 625 HA COMFORT







	MT-X 625 HA COMFORT Created on November 1,	2025 at 1:39 PM 010	
Capacities	Me	tric	
Max. capacity	2500) kg	
Max. lifting height	5.89	5 m	
Maximum outreach	3.40) m	
Breakout force with bucket	3427	daN	
Weight and dimensions			
Overall length to carriage	l11 3.90		
Length to face of forks	12 3.90		
Overall width	b1 1.81		
Overall height	h17 1.92		
Wheelbase	y 2.30		
Ground clearance	m4 0.33		
Overall cab width	b4 0.79		
Tilt-up angle	a4 12		
Tilt-down angle	a5 11:		
External turning radius (over tyres)	Wa1 3.3		
Unladen weight	5130		
Overall weight	4800		
Tires type	Pneur		
Standard tires	Solideal 12-16,5		
Forks length / width / section	I / e / s 1200 mm x 125	5 mm x 45 mm	
Performances			
Lifting	7.8		
Lowering	5.5		
Extension	5.4		
Retraction	3.5		
Crowd	3		
Dump	3	s	
Engine			
Engine brand	Kub	ota	
Engine norm	Stage	e IIIA	
Engine model	V3307-D	I-T-E3B	
Number of cylinders / Capacity of cylinders	4 - 333	1 cm³	
Engine power (Hp/kW)	75 Hp / 5	5.40 kW	
Max. torque / Engine rotation	265 Nm @	265 Nm @ 1400 rpm	
Drawbar pull (Laden)	3550	daN	
Electric circuit			
12V Battery capacity	110	Ah	
Transmission			
Transmission type	Hydro		
Number of gears (forward / reverse)	2 /		
Max. travel speed	24.90		
Max. travel speed (may vary according to applicable regulations)	25 k	25 km/h	
Parking brake		Automatic negative parking brake	
Service brake		Oil-Immersed multi-discs braking on front axles	
Axle Manufacturer	Da	na	
Hydraulics			
Hydraulic pump type	Gear		
Hydraulic flow / Pressure	90 l/min	-235 bar	
Tank capacities			
Engine oil	11.3		
Hydraulic oil	11:		
Hydraulic tank capacity	11.2		
Fuel	63	П	
Noise and vibration			
Noise at driving position (LpA)	76		
Noise to environment (LwA)	104		
Vibration on hands/arms	< 2.50	m/s²	
Compatible platform			
Platform capacity	Q 365		
Number of people	3		
Platform dimensions (length x width)	lp / ep 2000 m x		
Platform weight*	410	kg	
Miscellaneous			
Steering wheels (front / rear)	2 /	2	
Drive wheels (front / rear)	2 /	2	
Cab certification	ROPS - FOPS	cab (level 1)	
Controls	JS		
Additional information	Data indicated with bask	cet basket, except max.	
	capacity, lifting h	eigni anu Ullset.	

Data indicated with basket basket, except max. capacity, lifting height and offset.

MT-X 625 HA Comfort - Dimensional drawing









MT-X 625 HA Comfort - Load chart


Machine on tires with forks Metric

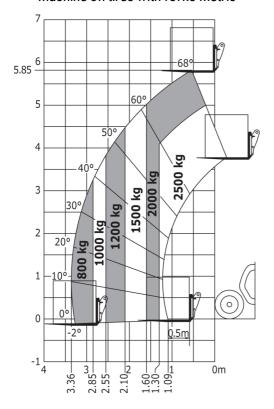

Machine with Man basket - Metric

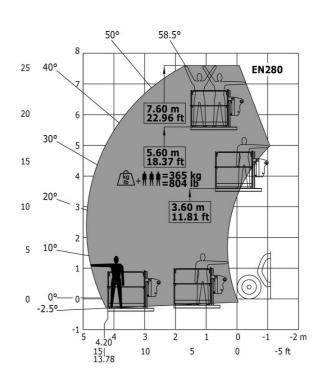

Load Chart metric

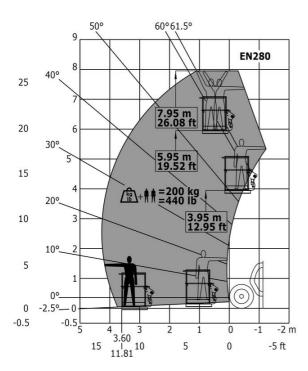





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes