Technical sheet:

# MT-X 625 HA COMFORT







Capacities		Metric
Max. capacity		2500 kg
Max. lifting height		5.85 m
Maximum outreach		3.40 m
Breakout force with bucket		3427 daN
		3427 daiy
Veight and dimensions	144	0.00
Overall length to carriage	l11	3.90 m
ength to face of forks	I2	3.90 m
Overall width	b1	1.81 m
Overall height	h17	1.92 m
Vheelbase	у	2.30 m
Ground clearance	m4	0.33 m
Overall cab width	b4	0.79 m
ilt-up angle	a4	12 °
ilt-down angle	a5	117 °
	Wa1	3.31 m
external turning radius (over tyres)	wai	
nladen weight		5130 kg
verall weight		4800 kg
ires type		Pneumatic
tandard tires		Solideal 12-16,5 12PR SKS XT TL
orks length / width / section	I / e / s	1200 mm x 125 mm x 45 mm
erformances		
ifting		7.80 s
owering		5.50 s
xtension		5.40 s
		3.50 s
etraction		
Prowd		3 s
итр		3 s
ngine		
ngine brand		Kubota
ngine norm		Stage IIIA
ngine model		V3307-DI-T-E3B
lumber of cylinders / Capacity of cylinders		4 - 3331 cm³
ingine power (Hp/kW)		75 Hp / 55.40 kW
Aax. torque / Engine rotation		265 Nm @ 1400 rpm
Drawbar pull (Laden)		3550 daN
Electric circuit		3330 dain
		440.41
2V Battery capacity		110 Ah
ransmission		
ransmission type		Hydrostatic
lumber of gears (forward / reverse)		2/2
Max. travel speed		24.90 km/h
flax. travel speed (may vary according to applicable regulations)		25 km/h
Parking brake		Automatic negative parking brake
ervice brake		Oil-Immersed multi-discs braking on front axles
xle Manufacturer		Dana
ydraulics	_	Dana
•		0
lydraulic pump type		Gear pump
ydraulic flow / Pressure		90 I/min-235 bar
ank capacities		
ngine oil		11.20 I
ydraulic oil		115 l
ydraulic tank capacity		11.20 l
uel		63 I
oise and vibration		
oise at driving position (LpA)		76 dB
oise to environment (LwA)		104 dB
ibration on hands/arms		
		2.50 m/s²
	Q	365 kg
latform capacity		3
latform capacity		
latform capacity lumber of people	lp / ep	2000 m x 1200 m
latform capacity umber of people latform dimensions (length x width)	lp / ep	
latform capacity umber of people latform dimensions (length x width) latform weight*	lp / ep	2000 m x 1200 m
latform capacity umber of people latform dimensions (length x width) latform weight* liscellaneous	lp / ep	2000 m x 1200 m 410 kg
Compatible platform Valform capacity  Lumber of people Valform dimensions (length x width) Valform weight* Valtering wheels (front / rear)	lp / ep	2000 m x 1200 m 410 kg 2 / 2
latform capacity lumber of people latform dimensions (length x width) latform weight* liscellaneous teering wheels (front / rear) rive wheels (front / rear)	lp / ep	2000 m x 1200 m 410 kg 2 / 2 2 / 2
latform capacity umber of people latform dimensions (length x width) latform weight* liscellaneous teering wheels (front / rear) rive wheels (front / rear) ab certification	lp / ep	2000 m x 1200 m 410 kg 2 / 2 2 / 2 ROPS - FOPS cab (level 1)
latform capacity umber of people latform dimensions (length x width) latform weight* liscellaneous teering wheels (front / rear) rive wheels (front / rear)	lp / ep	2000 m x 1200 m 410 kg 2 / 2 2 / 2

Data indicated with basket basket, except max. capacity, lifting height and offset.

## MT-X 625 HA Comfort - Dimensional drawing






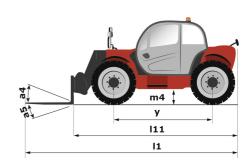


## MT-X 625 HA Comfort - Load chart


#### Machine on tires with forks Metric

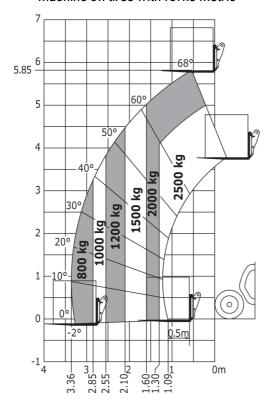

### Machine with Man basket - Metric

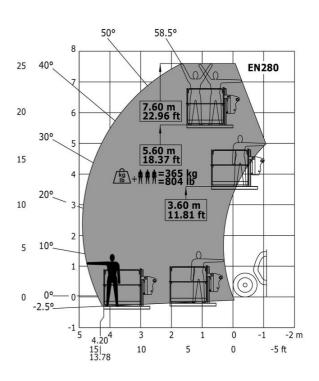

## Load Chart metric

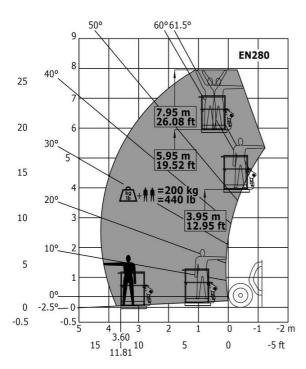





#### **Head Office**

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes