

Scheda tecnica :

MT 1335 H 75D ST5



 **MANITOU**
HANDLING YOUR WORLD


| Capacities | | Metrico |
|--|-----------|---|
| Max. capacity | | 3500 kg |
| Max. lifting height | | 12.60 m |
| Max. outreach | | 8.65 m |
| Breakout force with bucket | | 7400 daN |
| Weight and dimensions | | |
| Overall length to carriage | l11 | 5.72 m |
| Length to face of forks | l2 | 5.72 m |
| Overall length (with forks) | l1 | 6.92 m |
| Overall width | b1 | 2.28 m |
| Overall height | h17 | 2.48 m |
| Wheelbase | y | 2.80 m |
| Ground clearance | m4 | 0.42 m |
| Overall cab width | b4 | 0.95 m |
| Tilt-up angle | a4 | 13 ° |
| Tilt-down angle | a5 | 114 ° |
| External turning radius | Wa3 | 3.78 m |
| External turning radius (over tyres) | Wa1 | 3.78 m |
| Unladen weight (with forks) | | 9470 kg |
| Overall weight | | 9470 kg |
| Tires type | | Pneumatic |
| Standard tires | | Alliance 400/80 - 24 - 162A8 |
| Forks length / width / section | l / e / s | 1200 mm x 100 mm x 50 mm |
| Performances | | |
| Lifting | | 10.30 s |
| Lowering | | 9.60 s |
| Extension | | 14.70 s |
| Retraction | | 9.90 s |
| Crowd | | 3.20 s |
| Dump | | 3.80 s |
| Engine | | |
| Engine brand | | Deutz |
| Engine norm | | Stage V |
| Engine model | | TCD 2.9L |
| Number of cylinders / Capacity of cylinders | | 4 - 2924 cm ³ |
| I.C. Engine power rating - Power | | 75 Hp / 55.40 kW |
| Max. torque / Engine rotation | | 375 Nm @ 1400 rpm |
| Drawbar pull (Laden) | | 7130 daN |
| HVO validated (according to EN 15940 standard) | | SI |
| Electric circuit | | |
| 12V Battery capacity | | 110 Ah |
| Transmission | | |
| Transmission type | | Hydrostatic |
| Number of gears (forward / reverse) | | 2 / 2 |
| Max. travel speed | | 24.90 km/h |
| Parking brake | | Automatic parking brake |
| Service brake | | Hydraulic servo brake |
| Hydraulics | | |
| Hydraulic pump type | | Axial piston |
| Hydraulic flow / Pressure | | 133 l/min-270 bar |
| Tank capacities | | |
| Engine oil | | 8.50 l |
| Hydraulic oil | | 153 l |
| Fuel tank | | 137 l |
| Noise and vibration | | |
| Noise at driving position (LpA) | | 77 dB |
| Noise to environment (LWA) | | 104 dB |
| Vibration on hands/arms | | < 2.50 m/s ² |
| Miscellaneous | | |
| Steering wheels (front / rear) | | 2 / 2 |
| Drive wheels (front / rear) | | 2 / 2 |
| Safety / Safety cab homologation | | Standard EN 15000 / Cabin ROPS - FOPS level 2 |
| Controls | | JSM |

MT 1335 H 75D ST5 - Disegno quotato




MT 1335 H 75D ST5 - Diagramma di carico

Machine on tires with forks Metric

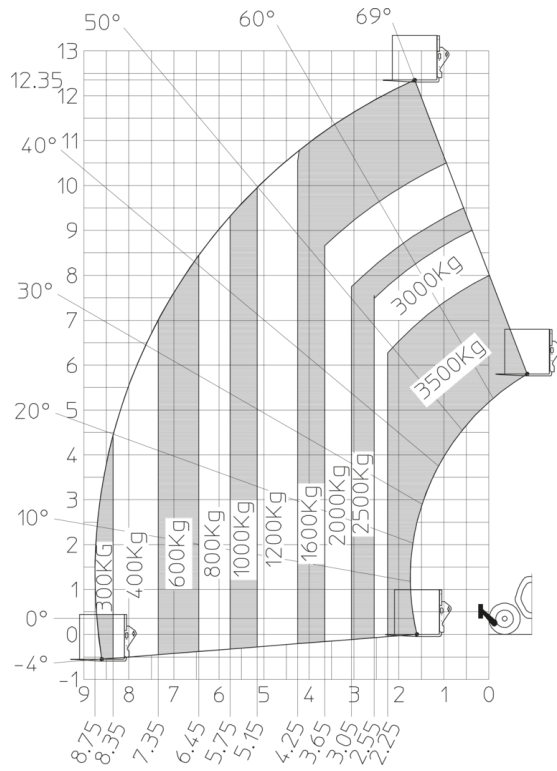

Machine on lowered stabilisers with forks Metric

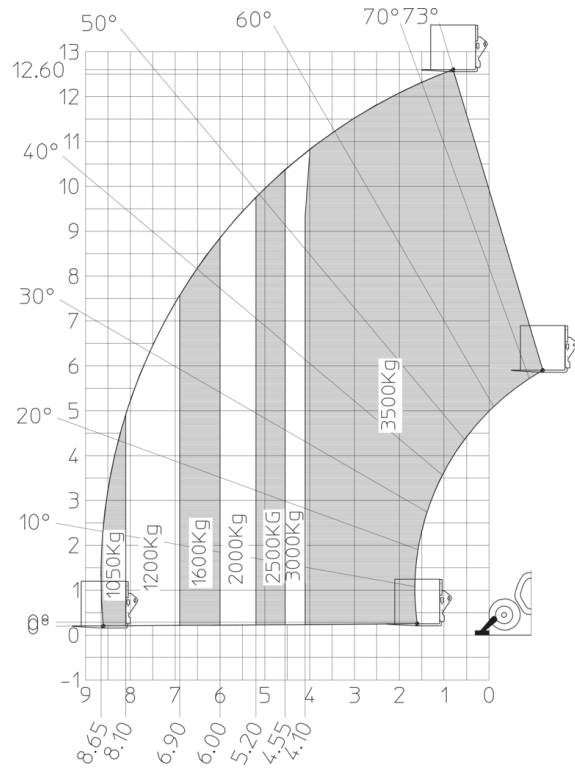



 **MANITOU**
HANDLING YOUR WORLD

Sede centrale

MANITOU ITALIA Srl

Via Cristoforo Colombo 2, Loc. Cavazzona - 41013 CASTELFRANCO EMILIA (MO)

Tel: 059.95.98.11 - Fax 059.95.98.65

www.manitou.com



Questa pubblicazione presenta la descrizione delle versioni e delle possibilità di configurazione dei prodotti Manitou, che possono differire per attrezzature. Gli allestimenti presentati nel presente opuscolo possono essere di serie, optional o non disponibili, a seconda delle versioni. Manitou si riserva il diritto di modificare, in qualsiasi momento e senza alcun preavviso, le specifiche tecniche descritte e rappresentate. Le specifiche indicate non rappresentano alcun obbligo per il costruttore. Per maggiori dettagli, rivolgersi al proprio concessionario Manitou. Documento non contrattuale. Elenco delle specifiche non esaustivo. I loghi nonché l'identità visiva dell'azienda sono di proprietà di Manitou e non possono essere utilizzati senza autorizzazione. Tutti i diritti riservati. Le immagini e gli schemi contenuti nel presente opuscolo sono forniti esclusivamente a fini di consultazione e a titolo indicativo.

Manitou BF SA - Società anonima con consiglio di amministrazione. Capitale sociale: 39,668,399 euro - 857 802 508 RCS Nantes