Technical sheet:


EP 20 INOX





Technical characteristics		Metric
Manufacturer		Manitou
Model Name		EP 20 Inox
Power source		Electrical - Lead
Operator type		Pedestrian
Max. capacity	Q	2000 kg
Load center of gravity	c	600 mm
Load distance, centre of drive axle to fork	X	952 mm
Wheelbase	у	1379 mm
Weight		
Service weight		482 kg
Weight on front axle (laden) / rear axle (laden)		1077 kg / 1405 kg
. , , , ,		337 kg / 145 kg
- , , , ,		<u> </u>
		Polyurethane cushion
		230 x 70
		82 x 68
		1/2/4
	h10	435 mm
		365 mm
	h13	87 mm
		1752 mm
-		601 mm
•		684 mm
		45 mm x 179 mm x 1120 mm
		544 mm
·		40 mm
		2170 mm
		1560 mm
-		125 mm
		870 mm
-		1320 mm
·	1114	1320 11111
		5 km/h / 5 km/h
, ,		0.02 m/s / 0.03 m/s
		0.02 m/s / 0.03 m/s
		10 % / 25 %
		Electro magnetic
		Handle Release
		natitule Release
-		1.20 kW
		1.20 kW
-		
, ,		DIN 43535-B
		24 V / 180 Ah
		180 kg
Miscellaneous Type of drive control		AC
	Model Name Power source Operator type Max. capacity Load center of gravity Load distance, centre of drive axle to fork Wheelbase Weight	Manufacturer Model Name Power source Operator type Max. capacity Q Load center of gravity c Load distance, centre of drive axle to fork Wheelbase y Weight Senice weight Weight on front axle (Idnalaen) / rear axle (Idnalen) Wheels Tires type Dimensions of front wheels Dimensions of front wheels Dimensions of front wheels Number of drive wheels / front wheels / rear wheels Front wheel gauge Bar wheels Bar wheel gauge Bar wheel gauge Bar wheel gauge Bar wheels wheels wheels Bar wheel gauge Bar wheels wheels wheels wheels wheels Bar wheel gauge Bar wheels wheels wheels wheels Bar wheel gauge Bar wheel g

EP 20 Inox - Dimensional drawing

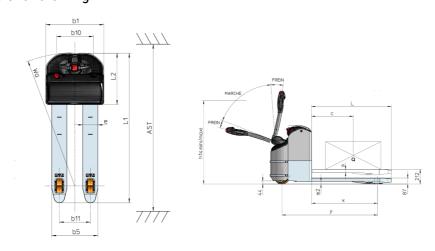





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes