

Ficha técnica :


# TMT-X 25 S K



 **MANITOU**  
HANDLING YOUR WORLD


|       | Technical characteristics                               |           | Métrico                       |
|-------|---------------------------------------------------------|-----------|-------------------------------|
| 1.1   | Manufacturer                                            |           | Manitou                       |
| 1.2   | Model Name                                              |           | TMT-X 25 S K                  |
| 1.2.1 | Reach out equipment                                     |           | Telescopic boom               |
| 1.3   | Power source                                            |           | Diesel                        |
| 1.4   | Operator type                                           |           | Seated                        |
| 1.5   | Max. capacity                                           | Q         | 2500 kg                       |
| 1.6   | Load center of gravity                                  | c         | 500 mm                        |
| 1.8   | Load distance, centre of drive axle to fork             | x         | -505 mm                       |
| 1.9   | Wheelbase                                               | y         | 1651 mm                       |
|       | <b>Weight</b>                                           |           |                               |
| 2.1   | Service weight                                          |           | 2615 kg                       |
|       | <b>Wheels</b>                                           |           |                               |
| 3.1   | Tires type                                              |           | Pneumatic                     |
| 3.2   | Dimensions of front wheels                              |           | 10 x 16.5                     |
| 3.3   | Dimensions of rear wheels                               |           | 10 x 16,5                     |
| 3.5   | Number of front wheels / rear wheels                    |           | 2 / 1                         |
| 3.5.2 | Drive wheels (front / rear)                             |           | 2 / 1                         |
| 3.6   | Front wheel gauge                                       | b10       | 2072 mm                       |
|       | <b>Dimensions</b>                                       |           |                               |
| 4.2   | Height telescopic boom lowered                          | h1        | 2285 mm                       |
| 4.3   | Mast free lift                                          | h2        | 1700 mm                       |
| 4.4   | Max. lifting height                                     | h3        | 3415 mm                       |
| 4.5   | Height telescopic boom extended                         | h4        | 3915 mm                       |
| 4.7   | Height of overhead guard (cabin)                        | h6        | 2203 mm                       |
| 4.19  | Overall length                                          | l1        | 2790 mm                       |
| 4.21  | Overall width                                           | b1        | 2348 mm                       |
| 4.22  | Forks section / width / length                          | s / e / l | 40 mm x 122 mm x 1200 mm      |
| 4.23  | Fork carriage ISO 2328 (class/form) A/B                 |           | 2A                            |
| 4.24  | Fork carriage width                                     | b3        | 1270 mm                       |
| 4.26  | Distance between wheel arms/loading surfaces            | b4        | 1520 mm                       |
| 4.28  | Max. outreach                                           |           | 1310 mm                       |
| 4.32  | Ground clearance at centre of wheelbase                 | m2        | 290 mm                        |
| 4.35  | Turning radius                                          | Wa        | 3072 mm                       |
|       | <b>Performances</b>                                     |           |                               |
| 5.1   | Travel speed (laden / unladen)                          |           | 11 km/h - 11 km/h             |
| 5.7   | Gradeability (laden / unladen)                          |           | 25 % / 35 %                   |
| 5.10  | Service brake                                           |           | Hydraulic                     |
| 5.11  | Transmission type                                       |           | Hydrostatic                   |
|       | <b>Engine</b>                                           |           |                               |
| 7.1   | Engine brand / norm                                     |           | Kubota - China IV, Stage IIIB |
| 7.2   | Engine power according to ISO 1585                      |           | 36.50 kW                      |
| 7.3   | Rated speed                                             |           | 2700 rpm                      |
| 7.4   | Number of cylinders / Capacity of cylinders             |           | 4 - 2400 cm³                  |
|       | <b>Miscellaneous</b>                                    |           |                               |
| 8.2   | Working hydraulic pressure for attachments              |           | 270 bar                       |
| 8.3   | Oil flow rate for attachments                           |           | 50 l/min                      |
| 8.4   | Sound level at the driver's ear according to DIN 12 053 |           | 81 dB                         |

TMT-X 25 S K - Diagrama dimensional

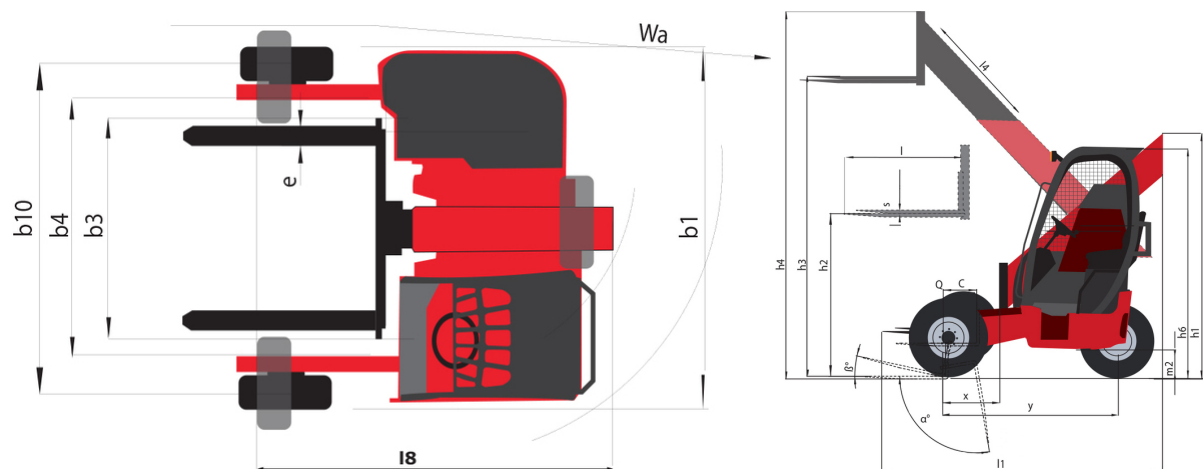


TMT-X 25 S K - Diagramas de carga

Machine on tyres with forks Metric

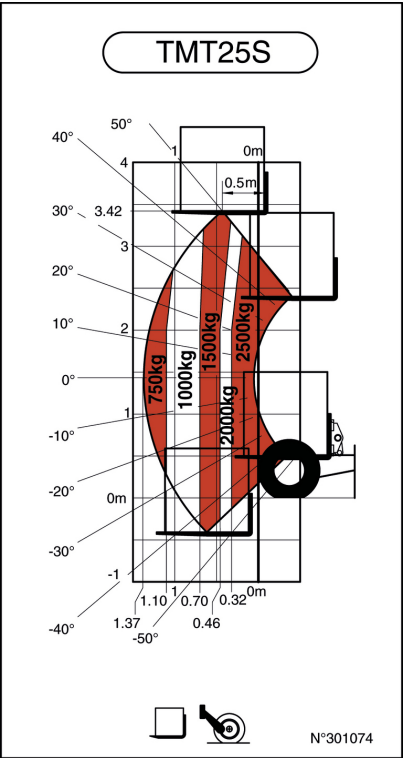

Machine on stabilisers with forks Metric

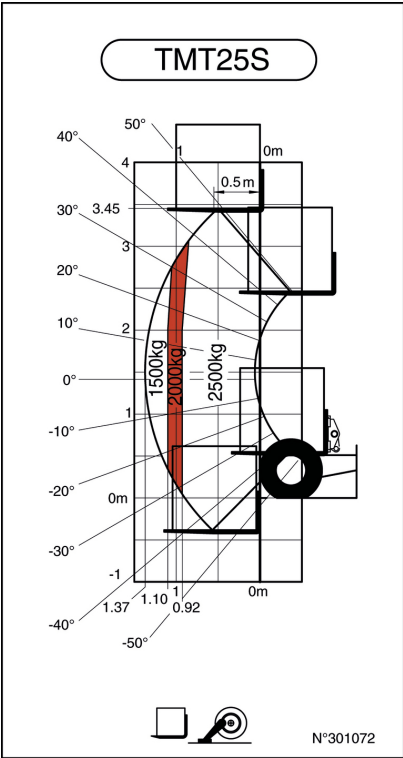



**Oficina Central**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - Francia

Tel.: 00 33 (0)2 40 09 10 11 - Fax: 00 33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



Esta publicación describe las versiones y posibilidades de configuración de los productos Manitou que puedan diferir en equipamiento. Los equipamientos presentados en este folleto pueden ser de serie, opcionales o no estar disponibles en algunas versiones. Manitou se reserva el derecho, en cualquier momento y sin previo aviso, de modificar las especificaciones descritas y representadas. Las especificaciones aportadas no comprometen al fabricante. Para más información, póngase en contacto con su concesionario Manitou. Documento no contractual. Presentación de los productos no contractual. Lista de especificaciones no exhaustiva. Los logos y la identidad visual de la empresa son propiedad de Manitou y no pueden ser utilizados sin autorización. Todos los derechos reservados. Las fotos y los esquemas contenidos en este folleto se ofrecen para consulta y a título indicativo solamente.

Manitou BF SA - Sociedad anónima con Consejo de Administración - Capital social: 39 668 399 euros - 857 802 508 RCS Nantes