Technical sheet:

MLT-X 741 T LSU






	MLT-X 741 T LSU Created on October 29, 2025 at 3:47 AM
Capacities	Metric
Max. capacity	Q 4100 kg
Max. lifting height	h3 6.90 m
Maximum outreach	3.90 m
Reach at max. height	1 m
Breakout force with bucket	6825 daN
Weight and dimensions	
Unladen weight (with forks)	7450 kg
Ground clearance	m4 0.44 m
Wheelbase	y 2.81 m
Overall length to carriage (with hitch)	I11 4.99 m
Front overhang	1.19 m
Overall width	b1 2.40 m
Overall cab width	b4 0.98 m
Overall height	h17 2.30 m
Tilt-down angle	a5 134°
Tilt-up angle	a4 13 °
External turning radius (over tyres)	Wa1 3.86 m
Standard tires	Alliance - A580 - 460/70 R24 159A8
Performances	Allidice - A300 - 400/70 K24 135A0
Lifting	8.10 s
Lowering	6.20 s
Extension	8.40 s
Retraction	6.40 S
Crowd	3.80 s
Dump	3.20 s
Engine Francisco broad	Dadina
Engine brand	Perkins
Engine norm	Stage IIIA
Engine model	1104D-44 T
Number of cylinders - Capacity of cylinders	4 - 4400 cm³
Engine power (Hp / kW)	101 Hp / 74.50 kW
Max. torque / Engine rotation	410 Nm @1600 rpm
Drawbar pull (Laden)	8200 daN
Reversible fan	Standard
Engine cooling system	3 radiators water + intercooler + transmission
Transmission Transmission type	Torque converter
Gearbox	Powershuttle
Number of gears (forward / reverse)	4 / 4
Max. travel speed (may vary according to applicable regulations)	35 km/h
Differential lock	Limited slip differential on front axle
Parking brake	Mechanical hand-operated parking brake
•	Oil-immersed multi-discs braking on front & n
Service brake	axles
Hydraulics	
Hydraulic pump type	Variable displacement pump
Hydraulic flow - Pressure	108 l/min - 270 bar
Flow sharing distributor	Standard
Tank capacities	
Hydraulic tank capacity	135
Fuel tank	142 I
Noise and vibration	
Noise at driving position (LpA) tested following NF EN 12053 norm	76 dB
Noise to environment (LwA)	104 dB
Vibration on hands/arms	< 2.50 m/s ²
Miscellaneous	
Tractor homologation	Tractor homologation
Cab certification	Cabin ROPS - FOPS level 2
Controls	JSM


Optional tires tab

	Overall height	Overall width
ALLIANCE - A570 - 17,5 LR24	-	-
MICHELIN - XHA - 15.5 R25 158A2	-	-
NOKIAN - TRI STEEL - 460/65 R24 156A8	2 27 m	2 38 m

MLT-X 741 T LSU - Dimensional drawing








MLT-X 741 T LSU - Load chart

Machine on tires with forks Metric

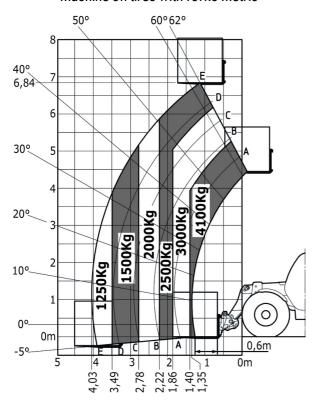





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes