Technical sheet:


# MXT 840 P IND






	MXT 840 PIND Created on November 27, 2025 at 11:42 PI
Capacities	Metric
Max. capacity	4000 kg
Max. lifting height	7600 mm
Maximum outreach	4230 mm
Weight and dimensions	7200 Hilli
Overall length to carriage	l11 4596 mm
Length to face of forks	12 4676 mm
Overall length (with forks)	I1 5876 mm
Overall width	b1 2387 mm
Overall height	h17 2595 mm
Wheelbase	y 2582 mm
Ground clearance	m4 372 mm
Overall cab width	b4 850 mm
Tilt-up angle	a4 12 °
Tilt-down angle	a5 134 °
External turning radius (over tyres)	Wa1 3900 mm
Unladen weight (with forks)	8500 kg
Tires type	Inflatable
Standard tires	BKT 16.0/70-20 14PR- EM936 SPL
Forks length / width / section	I / e / s 1200 mm x 125 mm x 50 mm
Performances	
Lifting	12.70 s
	9 s
Lowering	
Extension	9.20 s
Retraction	6.20 s
Dump	3.90 s
Engine	
Engine brand	Perkins
Engine norm	Stage IIIA
Engine model	1104D-44T
Number of cylinders / Capacity of cylinders	4 - 4400 cm <sup>3</sup>
Engine power (Hp/kW)	94 Hp / 70 kW
Max. torque / Engine rotation	392 Nm @ 1400 rpm
Drawbar pull	7800 daN
Drawbar pull (Laden)	7800 daN
Engine/Battery	
Battery technology	Lead acid
Battery capacity	130 Ah
Electric circuit	130 All
	10.W/100.Ab
Battery voltage / capacity	12 V / 130 Ah
Transmission	
Transmission type	Torque converter
Number of gears (forward / reverse)	4/4
Max. travel speed	26 km/h
Max. travel speed (may vary according to applicable regulations)	26 km/h
Parking brake	Oil-Immersed Multi-Disc Braking front and rea
Service brake	Oil-immersed multi-discs braking on front &
Hydraulics	axles
Hydraulic pump type	Gear pump
	91.40 l/min-250 bar
Hydraulic flow / Pressure	91.40 I/IIII1-250 DBT
Tank capacities	40.
Engine oil	101
Hydraulic oil	125
Fuel	100 l
Noise and vibration	
Noise at driving position (LpA)	85 dB
Noise to environment (LwA)	110 dB
Miscellaneous	
Steering wheels (front / rear)	2/2
Drive wheels (front / rear)	2/2
Cab certification	Cabin ROPS - FOPS level 2

## MXT 840 P IND - Dimensional drawing








### MXT 840 P IND - Load chart

### Machine on tires with forks Metric

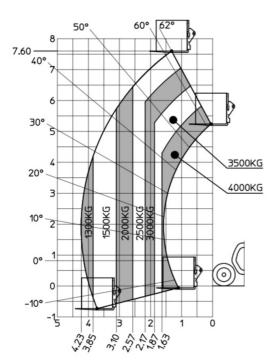





#### **Head Office**

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes