Technical sheet :

TMT 251 Y ST5







-		
	Technical characteristics	
1.1	Manufacturer	
1.2	Model Name	
1.2.1	Reach out equipment	
1.3	Power source	
1.4	Operator type	
1.5	Max. capacity	
1.6	Load center of gravity	
1.8	Load distance, centre of drive axle to fork	
1.9	Wheelbase	
	Weight	
2.1	Service weight	
	Wheels	
3.1	Tires type	
3.2	Dimensions of front wheels	
3.3	Dimensions of rear wheels	
3.5	Number of front wheels / rear wheels	
3.5.2	Drive wheels (front / rear)	
3.6	Front wheel gauge	b
3.0	Dimensions	
4.1	Mast/fork carriage tilt, forward	
4.1.1	Mast/fork carriage tilt, backward	
4.1.1	•	
	Height telescopic boom lowered	ł
4.3	Mast free lift	H
4.4	Max. lifting height	H
4.5	Height telescopic boom extended	H
4.7	Height of overhead guard (cabin)	1
4.8	Seat height/stand height	ł
4.19	Overall length	
4.20	Length to face of forks	
4.21	Overall width	ł
4.22	Forks section / width / length	s /
4.23	Fork carriage ISO 2328 (class/form) A/B	
4.24	Fork carriage width	ł
4.25	Distance between support arms	ł
4.26	Distance between wheel arms/loading surfaces	I
4.28	Maximum horizontal extension at COG 600	
4.28	Max. outreach	
4.32	Ground clearance at centre of wheelbase	r
4.33	Aisle Width for pallets 1000 x 1200 crossways	A
4.34	Aisle width for 800 x 1200 pallet lengthways	A
4.35	Turning radius	۷
	Performances	
5.2	Lifting speed (laden / unladen)	
5.5	Nominal pulling force (laden)	
5.3	Lowering speed (laden / unladen)	
5.10	Service brake	
	Engine	
7.1	Engine brand / norm	
7.2	Engine power according to ISO 1585	
7.3	Rated speed	
7.4	Number of cylinders / Capacity of cylinders	
	Miscellaneous	
8.1	Type of drive control	
8.2	Working hydraulic pressure for attachments	
8.3	Oil flow rate for attachments	
	Measured/guaranteed mean noise level at the ear of the operator	

TMT 251 Y ST5	Created on 21 May 2024 at 21:24:02 UTC
	Metric
	MANITOU
	TMT 25I Y ST5
	Telescopic boom
	Diesel
	Seated
Q	2500 kg
c	600 mm
	-505 mm
x	
У	1784 mm
	2320 kg
	2320 kg
	Pneumatic
	18x7-8
	10x16,5
	2 / 1
	2 / 1
b10	2102 mm
510	
	100 °
	12 °
h1	2240 mm
h2	1440 mm
h3	3380 mm
h4	3925 mm
h6	2200 mm
h7	1220 mm
11	2790 mm
12	1590 mm
b1	2266 mm
s/e/l	40 mm x 125 mm x 1200 mm
07071	FEM 2A
b3	1270 mm
b4	1267 mm
b4	1634 mm
14	1310 mm
	1310 mm
m2	278 mm
Ast	3970 mm
Ast	3970 mm
Wa	3011 mm
	0.25 m/s / 0.27 m/s
	1800
	0.29 m/s / 0.32 m/s
	Hydraulic brakes by loss of pressure
	Yanmar - Stage V
	31 kW
	2800 rpm
	3 - 1568 cm³
	Mechanical
	270 bar
	44 l/min
	104 dB


TMT 25I Y ST5 - Dimensional drawing

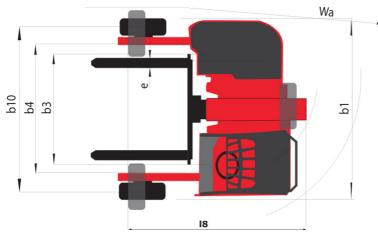



TMT 25I Y ST5 - Load chart

Machine on tyres with forks Metric

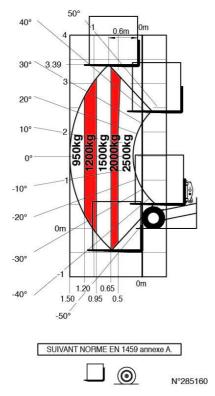



Head Office B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes