Technical sheet:


TMT 55 XT 4W Y ST5





	Technical characteristics		Imperial
1.1	Manufacturer		Manitou
1.2	Model Name		TMT 55 XT 4W Y ST5
.2.1	Reach out equipment		Telescopic boom
1.3	Power source		Diesel
1.4	Operator type		Seated
1.5	Max. capacity	Q	5512 lb
1.6	Load center of gravity	С	24 in
1.8	Load distance, centre of drive axle to fork	х	-20 in
1.9	Wheelbase	у	65 in
	Weight		
2.1	Service weight		6415 lb
	Wheels		
3.1	Tires type		Pneumatic
3.2	Dimensions of front wheels		10x16,5
3.3	Dimensions of rear wheels		31x15,5-15
3.5	Number of front wheels / rear wheels		2/1
.5.2	Drive wheels (front / rear)		2/1
3.6	Front wheel gauge	b10	86 in
3.0	Dimensions	510	00 III
4.1	Mast/fork carriage tilt, forward		100 °
4.1		α	12 °
	Mast/fork carriage tilt, backward	β	
4.2	Height telescopic boom lowered	h1	89 in
4.3	Mast free lift	h2	57 in
4.4	Max. lifting height	h3	134 in
4.5	Height telescopic boom extended	h4	154 in
4.7	Height of overhead guard (cabin)	h6	93 in
4.8	Seat height/stand height	h7	55 in
1.19	Overall length	l1	111 in
1.20	Length to face of forks	12	63 in
1.21	Overall width	b1	97 in
1.22	Forks section / width / length	s / e / l	2 in x 4 in x 48 in
1.23	Fork carriage ISO 2328 (class/form) A/B		FEM 2A
1.24	Fork carriage width	b3	50 in
1.26	Distance between support arms	b5	49 in
1.26	Distance between wheel arms/loading surfaces	b4	60 in
1.28	Maximum horizontal extension at COG 600	14	52 in
1.32	Ground clearance at centre of wheelbase	m2	11 in
1.33	Aisle Width for pallets 1000 x 1200 crossways	Ast	79 in
1.34	Aisle width for 800 x 1200 pallet lengthways	Ast	77 in
1.35	Tuming radius	Wa	117 in
	Performances		
5.2	Lifting speed (laden / unladen)		0.82 ft/s / 0.89 ft/s
5.3	Lowering speed (laden / unladen)		0.95 ft/s / 1 ft/s
5.10	Service brake		Hydraulic brakes by loss of pressure
	Engine		, diddie blanco by 1000 of pressure
7.1	Engine brand / norm / model		Yanmar - Stage V / 3TNV 86 CT
7.1	Engine power (Hp / kW)		42 Hp / 31 kW
7.3	Rated speed		2800 rpm
7.4	Number of cylinders / Capacity of cylinders		3 - 96 in³
	Miscellaneous		
0.4	Type of drive control		Mechanical
8.1			,
8.1 8.2 8.3	Working hydraulic pressure for attachments Oil flow rate for attachments		3916 PSI 12 US gpm

TMT 55 XT 4W Y ST5 - Dimensional drawing

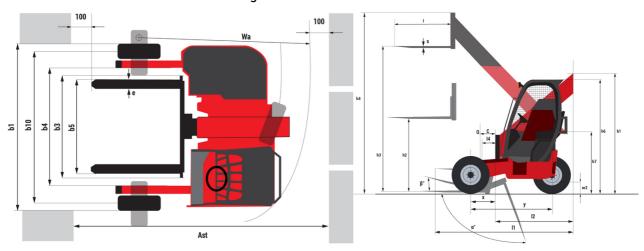


TMT 55 XT 4W Y ST5 - Load chart

Machine on tires with forks Imperial

40° 50° 4 30° 11'3" 20° 3 10 20° 3 10 20° 4 10° 24" 10.6 feet 1.10m 24" 10.0 feet 1.47m 1.47m 1.47m 0.46m 1.47m 0.46m 1.0 meters

Machine on lowered stabilisers with forks Imperial

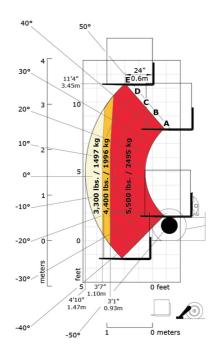





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes