

Technische fiche :

# SE 0808

OXYGEN




 **MANITOU**  
HANDLING YOUR WORLD

Capacities		Metrisch
Working height maximum (indoor)	h21	7.80 m
Working height maximum (outdoor)	h21'	7.80 m
Platform height maximum (indoor)	h7	5.80 m
Platform height maximum (outdoor)	h7'	5.80 m
Platform capacity	Q	230 kg
Max. capacity on the extension deck		115 kg
Number of people (indoor / outdoor)		2 / 1
Weight and dimensions		
Platform weight*		1500 kg
Platform dimensions (length x width)	lp / ep	1.64 m x 0.75 m
Platform dimensions with extension (length x width)		2.54 m x 0.75 m
Floor height (access)	h20	1.02 m
Overall length	l1	1.88 m
Overall width	b1	0.81 m
Overall height	h17	2.17 m
Overall height (stowed)	h18 ***	1.99 m
Deck opening length	dp	0.90 m
Overall length with platform extension	l15	2.76 m
Outside turning radius - platform	Wa2	1.73 m
Ground clearance with pothole guards deployed	m6	0.01 m
Ground clearance with pothole guards folded	m2	0.05 m
Wheelbase	y	1.40 m
Performances		
Drive speed - stowed		4.50 km/h
Drive speed - raised		0.80 km/h
Raise speed (laden) / Lower speed (laden)		17 s / 18 s
Gradeability		25 %
Indoor and outdoor max Tilt Rating (Fore and Aft / Side-to-Side)		3.50 ° / 1.50 °
Wheels		
Tires type		Non marking
Standard tires		12 x 4 in / 305 x 106 mm
Drive wheels (front / rear)		2 / 0
Steering wheels (front / rear)		2 / 0
Braking wheels (front / rear)		2 / 0
Service brake		Electric
Engine/Battery		
Battery technology		Lead acid
Number of batteries / Battery nominal voltage / Battery capacity		4 / 6 V / 185 Ah
Battery energy		4.40 kWh
On-board charger (V / A)		24 V / 30 A
Miscellaneous		
Number of cycles with STD Battery (HIRD)		146
Hydraulic Pressure		250 bar
Hydraulic tank capacity		12 l
Sound pressure level (platform work station) (platform work station)		66.60 dB
Vibration on hands/arms		< 0.50 m/s <sup>2</sup>
Standards compliance		
This machine is in compliance with:		2006/42/CE European standard: EN 280 + A1 2015 - EMC: 2014/30/EU - Noise directive: 2000/14/CE - Safety of machinery: EN ISO 13849-1: 2008


\*Varies according to options and standards of the country to which the machine is delivered

\*\*\* With folded guardrail

## SE 0808 - Lastendiagram

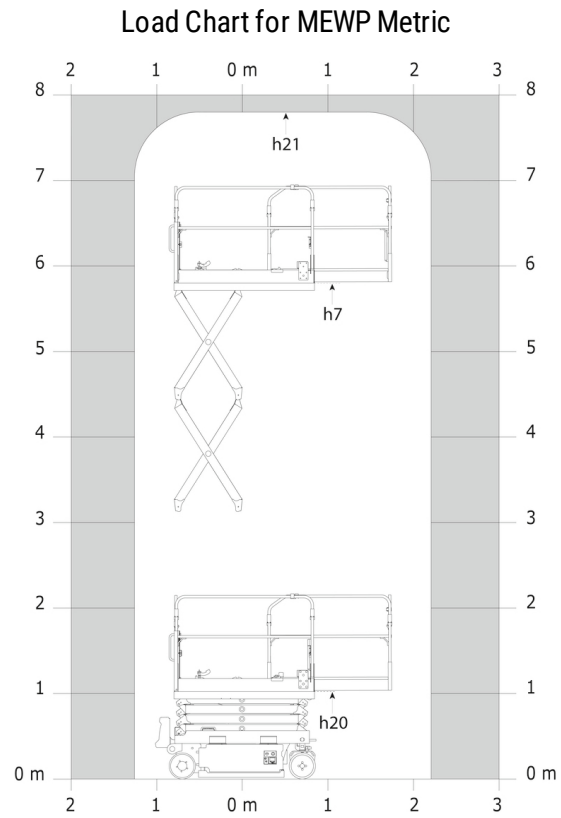

## SE 0808 - Tekening met afmetingen

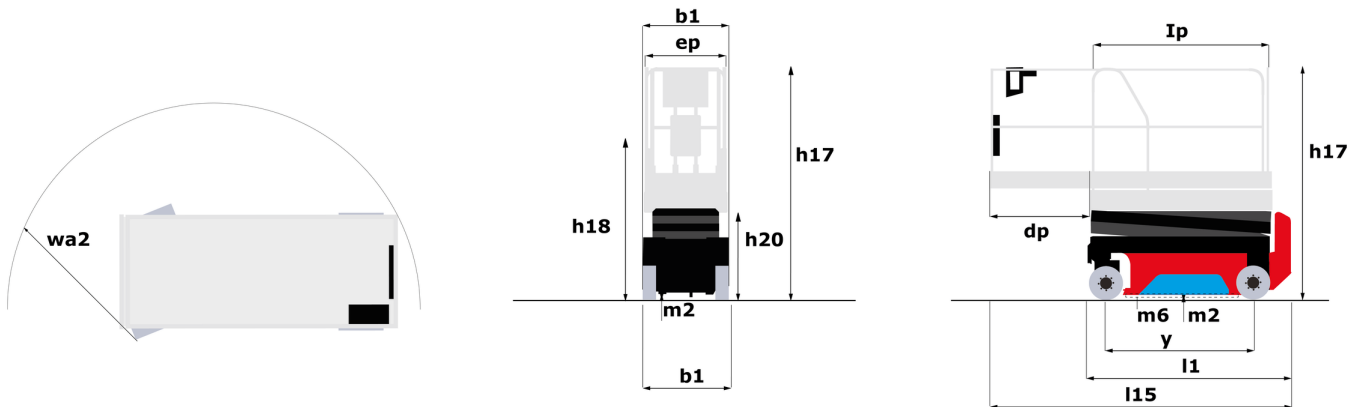

# Uitrusting

## Standaard

2 swing out component trays (hydraulic/electric)  
Audible alarm and illuminated indicator lamp (leveling, overload, lowering)  
Battery - 24V - 185Ah - semi-traction  
Battery charge indicator lamp  
CAN bus technology  
Colour screen with integrated diagnostics  
Descent alarm  
Easy Link with 2 year Service  
Electrical front wheel brake  
Emergency stop button in platform and on frame  
Folding rails with full height access gate  
Hom in the platform  
Hour meter  
Manual emergency lowering  
Multi-voltage on-board charger - 24V - 30A - Single-phase  
Pothole protection with automatic operation  
Side and rear forklift pockets  
Sliding basket extension - 90 cm

## Optioneel

Audio warning on all motion  
Audio warning on translation  
Biodegradable hydraulic oil - Grade 32  
Easy Link - With access control keypad  
Easy link with remote lock  
Electric plug - 110 or 230V - In the basket - With differential circuit breaker - European type  
Safety kit - Harness + helmet  
Working light (x1) on basket



 **MANITOU**  
**HANDLING YOUR WORLD**

**Hoofdkantoor**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - Frankrijk

Tel.: 00 33 (0)2 40 09 10 11 - Fax: 00 33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



Deze brochure beschrijft versies en con guratie-opties voor Manitou-producten die met verschillende apparatuur kunnen worden uitgerust. De uitrusting die in deze brochure wordt beschreven, kan standaard, optioneel of niet leverbaar zijn, afhankelijk van de uitvoering. Manitou behoudt zich het recht voor om de weergegeven en beschreven speci caties op elk moment en zonder kennisgeving vooraf te wijzigen. De fabrikant is niet aansprakelijk voor de gegeven speci caties. Neem voor meer informatie contact op met uw Manitou-dealer. Niet-contractueel document. De productbeschrijvingen kunnen afwijken van de werkelijke producten. De lijst met speci caties is niet allesomvattend. De logo's en visuele identiteit van het bedrijf zijn eigendom van Manitou en mogen niet zonder toestemming worden gebruikt. Alle rechten voorbehouden. De foto's en diagrammen in deze brochure zijn uitsluitend bedoeld voor raadpleging en informatie.

MANITOU BF SA - Naamloze vennootschap met raad van bestuur - Aande- lenkapitaal: 39.668.399 euro - 857 802 508 RCS Nantes