Technical sheet:

# MLT 937-115 (S1)





	MLT 937-115 (S1) Created on October 16, 2025 at 1:1	IO PM U
Capacities	Metric	
Max. capacity	Q 3700 kg	
fax. lifting height	h3 9.10 m	
faximum outreach	6.55 m	
each at max. height	2.20 m	
Breakout force with bucket	4472 daN	
Veight and dimensions		
Inladen weight (with forks)	8235 kg	
Ground clearance	m4 0.44 m	
Vheelbase	y 2.81 m	
verall length to carriage (with hitch)	I11 5.12 m	
ront overhang	1.36 m	
one overland	b1 2.39 m	
Overall cab width	b4 0.95 m	
Overall height	h17 2.38 m	
ilt-down angle	a5 133 °	
ilt-up angle	a4 14 °	
external turning radius (over tyres)	Wa1 3.93 m	
tandard tires	Alliance - A580 - 460/70 R24 15	9A8
rive wheels (front / rear)	2/2	
teering wheels (front / rear)	2/2	
Performances		
ifting	7.75 s	
owering	7.43 s	
extension	10.91 s	
Retraction	9.63 s	
Crowd	3.68 s	
Oump	3.12 s	
Engine Control of the		
Engine brand	Deutz	
Engine norm	Stage V	
Engine model	TCD 3.6 L4	
Number of cylinders - Capacity of cylinders	4 - 3621 cm³	
Engine power (Hp / kW)	116 Hp / 85 kW	
Max. torque / Engine rotation	460 Nm @1600 rpm	
Orawbar pull (Laden)	8400 daN	
Reversible fan	Option	
Engine cooling system	4 radiators (water + intercooler + hydra transmission oil)	aulic oil +
IVO validated (according to EN 15940 standard)	Yes	
ransmission	Tes	
ransmission type	Torque converter	
Searbox		
	Powershuttle	
Number of gears (forward / reverse)	4/4	
Max. travel speed (may vary according to applicable regulations)	33 km/h	
)ifferential lock	Limited slip differential on front	
Parking brake	Automatic negative parking bra	
Service brake	Oil-immersed multi-discs braking on fi axles	ront & rea
	axies	
Hydraulics	Madakla dianlaa	
Hydraulic pump type	Variable displacement pump	
Hydraulic flow - Pressure	150 l/min - 270 bar	
low sharing distributor	Standard	
Tank capacities		
lydraulic tank capacity	135	
uel tank	120	
iesel Exhaust fluid (AdBlue® type)	10	
loise and vibration		
loise at driving position (LpA) tested following NF EN 12053 norm	75 dB	
libration on hands/arms	< 2.50 m/s <sup>2</sup>	
Miscellaneous		
Fractor homologation	Tractor homologation	
Cab certification	Cabin ROPS - FOPS level 2	

# Optional tires tab


	Overall height	Overall width
TRELLEBORG - TH400 - 460/70 R24 159A8	2.37 m	2.40 m
TRELLEBORG - TH400 - 500/70 R24 164A8	2.39 m	2.42 m
MICHELIN - XMCL - 500/70 R24 164A8	2.39 m	2.43 m
MICHELIN - BIBLOAD - 460/70 R24 159A8	2.37 m	2.40 m
MICHELIN - BIBLOAD - 500/70 R24 164A8	2.39 m	2.43 m
MICHELIN - XHA - 15.5 R25 158A2	2.37 m	2.40 m
NOKIAN - TRI STEEL - 460/65 R24 156A8	2.36 m	2.40 m
MICHELIN - XMCL - 460/70 R24 159A8	2.37 m	2.40 m
VREDESTEIN - ENDURION - 460/70 R24 159A8	2.38 m	2.41 m
VREDESTEIN - ENDURION - 500/70 R24 164A8	2.41 m	2.44 m
TRELLEBORG - TH500 - 460/70 R24 159A8	2.37 m	2.40 m
ALLIANCE - A585 - 460/70 R24 159A8	2.37 m	2.40 m


## **Options / Finishing**

S : Standard / O : Optional / - : Not available

	Classic	Premium
Lifting function		
Attachment hydraulic locking	0	0
Operator station		
Air suspension fabric seat - GRAMMER	0	S
Automatic air conditioning	0	S
Bluetooth USB radio - With extra microphone - 100W	0	0
Bluetooth USB radio - With integrated microphone - 100W	0	S
Boom suspension - "Active CRC"	0	0
Extra front wiper	0	S
Harmony screen - 5 in.	S	S
Lateral wiper	0	0
Low frequency air suspension fabric seat - GRAMMER	0	0
Low frequency air suspension fabric seat with heating - GRAMMER	0	0
Mechanical suspension fabric seat - GRAMMER	S	-
Storage box - On the shelf	0	0
Tuner car radio - 50W	S	-
Motorization/Power		
Auto reversing fan	0	0
Continuous flow hydraulics	0	0
Secondary functions		
Automatic greasing system (AGS) - Chassis + boom	0	0
Lighting		
led front road lights	0	0
LED work lights - On the top of the boom (fixed part) (x2)	0	0


### MLT 937-115 (S1) - Dimensional drawing

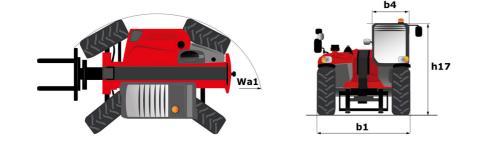



### MLT 937-115 (S1) - Load chart

#### Machine on tires with forks Metric

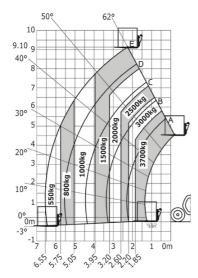





#### **Head Office**

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes