Technical sheet:

MT 625 E







	MT 625 E Created on December 14, 2025 at 2:18	7 (111)
Capacities	Metric	
Max. capacity	2500 kg	
ax. lifting height	5.85 m	
aximum outreach	3.36 m	
eakout force with bucket	3770 daN	
eight and dimensions		
verall length to carriage	I11 3.83 m	
verall length (with forks)	l1 5.09 m	
verall width	b1 1.81 m	
verall height	h17 1.92 m	
heelbase	y 2.30 m	
round clearance	m4 0.33 m	
verall cab width	b4 0.80 m	
It-up angle	a4 12 °	
It-down angle	a5 117 °	
cternal turning radius (over tyres)	Wa1 3.31 m	
verall weight	4755 kg	
res type	Inflatable CAMSO SKS532 12-16.5	
andard tires		
orks length / width / section	I / e / s 1200 mm x 125 mm x 45 mm	
erformances	4440	
fting	11.10 s	
owering	8 s	
rtension	7.70 s	
etraction	7.40 s	
rowd	4.45 s	
итр	4.30 s	
ngine		
ax. torque	200 Nm	
rawbar pull (Laden)	2090 daN	
ngine/Battery		
rive motor power rating	40 kW	
ydraulic motor power	33 kW	
attery technology	Lithium-ion	
attery capacity	348 Ah	
attery energy	35 kWh	
harger Power / Phase / Current type	3 kW / Single-phase / AC	
ectric circuit		
attery voltage / capacity	100 V / 348 Ah	
2V Battery capacity	74 Ah	
ansmission		
ansmission type	Electrical	
umber of gears (forward / reverse)	1/1	
ax. travel speed	20 km/h	
arking brake	Hydraulic spring release SAHR	
ervice brake	Hydraulic	
ydraulics	Tystautic	
ydraulic pump type	Gear pump	
ydraulic flow / Pressure	84 I/min-235 bar	
ank capacities	04 I/IIIII1-233 Dal	
ydraulic oil	80	
	801	
oise and vibration	70.15	
oise at driving position (LpA)	72 dB	
oise to environment (LwA)	92 dB	
bration on hands/arms	2.50 m/s²	
liscellaneous		
teering wheels (front / rear)	2/2	

Options / Finishing


S: Standard / O: Optional / -: Not available


<u> </u>	
Onboard charger - 3kW AC_MT	
Operator station	
12Volt Power Port	
Adjustable and telescopic steering column	
Air suspension fabric seat - GRAMMER	
Document holder	
Heating	
Manual air conditioning	
Phone support	
Rear window with de-icing	
Rear wiper	
Roof wiper	
Tuner car radio - 50W	
Motorization/Power	
On-board charger 9kW	
Lighting	
Flat Led Rotating Beacon	
led front road lights	
LED front work lights on cab (x2)	
LED rear work lights on cab (x2)	
Security	
Audio warning on reverse	
Battery cut-off	
Speed limiter	
Windscreen sun visor	

Standard		
	S	
	S	
	3	
C		
	S	
C		
C		
	S	
	S	
C)	
C)	
C		
	S	
5	3	
	3	
	3	
	3	
)	

MT 625 e - Dimensional drawing








MT 625 e - Load chart

Machine on tires with forks Metric

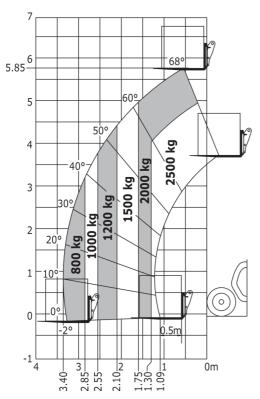





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes