Technical sheet:

# MT 625 E







	MT 6≥5 € Created on October 26, 2025 at 3:11 A
Capacities	Metric
lax. capacity	2500 kg
ax. lifting height	5.85 m
aximum outreach	3.36 m
eakout force with bucket	3770 daN
/eight and dimensions	
Iverall length to carriage	I11 3.83 m
verall length (with forks)	l1 5.09 m
Iverall width	b1 1.81 m
Overall height	h17 1.92 m
Vheelbase	y 2.30 m
Ground clearance	m4 0.33 m
Overall cab width	b4 0.80 m
Filt-up angle	a4 12 °
Filt-down angle	a5 117 °
external turning radius (over tyres)	
Overall weight	4755 kg
Fires type	Inflatable
Standard tires	CAMSO SKS532 12-16.5
Forks length / width / section	I / e / s 1200 mm x 125 mm x 45 mm
Performances	
ifting	11.10 s
owering	8 s
extension	7.70 s
Retraction	7.40 s
Crowd	4.45 s
Dump	4.30 s
Engine	
Max. torque	200 Nm
Drawbar pull (Laden)	2090 daN
Engine/Battery	
Drive motor power rating	40 kW
Hydraulic motor power	33 kW
Battery technology	Lithium-ion
Battery capacity	348 Ah
Battery energy	35 kWh
Charger Power / Phase / Current type	3 kW / Single-phase / AC
Electric circuit	
Battery voltage / capacity	100 V / 348 Ah
12V Battery capacity	74 Ah
Transmission	
Fransmission type	Electrical
Number of gears (forward / reverse)	1/1
Max. travel speed	20 km/h
Parking brake	Hydraulic spring release SAHR
Service brake	Hydraulic
lydraulics	riyalalit
Hydraulic pump type	Gear pump
Hydraulic flow / Pressure	84 l/min-235 bar
Fank capacities	04 I/IIIII-Z53 Udi
Hydraulic oil	80
•	80 1
Noise and vibration	
Noise at driving position (LpA)	72 dB
Noise to environment (LwA)	92 dB
Vibration on hands/arms	< 2.50 m/s²
Miscellaneous	
Steering wheels (front / rear)	2/2

## Options / Finishing


S: Standard / O: Optional / -: Not available


_	
External charger - 3	0kW DC - Lithium-ion - Single/Three-phase
Onboard charger - 3	3 1
Operator station	
12Volt Power Port	
Adjustable and tele	escopic steering column
Air suspension fab	ric seat - GRAMMER
Document holder	
Heating	
Manual air condition	ning
Phone support	
Rear window with d	e-icing
Rear wiper	
Roof wiper	
Tuner car radio - 50	W
Motorization/Powe	
On-board charger 9	kW
Lighting	
Flat Led Rotating B	eacon
led front road lights	8
LED front work ligh	ts on cab (x2)
LED rear work light	s on cab (x2)
Security	
Audio warning on r	everse
Battery cut-off	
Speed limiter	
Windscreen sun vis	or

Stand	ard	
0		
S		
S		
S		
0		
0		
S		
0		
0		
0		
S		
S		
0		
0		
0		
S		
S		
S		
S		
S		
0		
c		

MT 625 e - Dimensional drawing








### MT 625 e - Load chart

#### Machine on tires with forks Metric

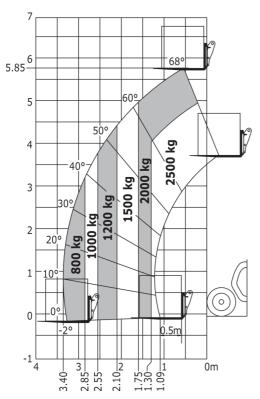





#### **Head Office**

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes