

Scheda tecnica :

# SE 1008

OXYGEN



 **MANITOU**  
HANDLING YOUR WORLD

Capacities		Metrico
Working height maximum (indoor)	h21	9.99 m
Working height maximum (outdoor)	h21'	9 m
Platform height maximum (indoor)	h7	7.99 m
Platform height maximum (outdoor)	h7'	7 m
Platform capacity	Q	230 kg
Max. capacity on the extension deck		115 kg
Number of people (indoor / outdoor)		2 / 1
Weight and dimensions		
Platform weight*		2210 kg
Platform dimensions (length x width)	lp / ep	2.20 m x 0.79 m
Platform dimensions with extension (length x width)		3.10 m x 0.79 m
Floor height (access)	h20	1.25 m
Overall length	l1	2.42 m
Overall width	b1	0.82 m
Overall height	h17	2.17 m
Overall height (stowed)	h18 ***	1.98 m
Deck opening length	dp	0.90 m
Overall length with platform extension	l15	3.31 m
Outside turning radius - platform	Wa2	2.17 m
Internal turning radius		0 m
Ground clearance with pothole guards deployed	m6	0.02 m
Ground clearance with pothole guards folded	m2	0.08 m
Wheelbase	y	1.75 m
Performances		
Drive speed - stowed		4.50 km/h
Drive speed - raised		0.80 km/h
Raise speed (laden) / Lower speed (laden)		33 s / 32 s
Gradeability		25 %
Indoor and outdoor max Tilt Rating (Fore and Aft / Side-to-Side)		3.50 ° / 1.50 °
Wheels		
Tires type		Non marking
Standard tires		15 x 5 in / 381 x 125 mm
Drive wheels (front / rear)		2 / 0
Steering wheels (front / rear)		2 / 0
Braking wheels (front / rear)		2 / 0
Service brake		Electric
Engine/Battery		
Battery technology		Semi-traction
Number of batteries / Battery nominal voltage / Battery capacity		4 / 6 V / 185 Ah
Battery energy		4.40 kWh
On-board charger (V / A)		24 V / 30 A
Miscellaneous		
Hydraulic Pressure		250 bar
Hydraulic tank capacity		24 l
Sound pressure level (platform work station) (platform work station)		66.60 dB
Vibration on hands/arms		< 0.50 m/s <sup>2</sup>
Standards compliance		
This machine is in compliance with:		European directives: 2006/42/EC- Machinery (revised EN280-1:2022) - 2004/108/EC (EMC) - 2006/95/EC (Low voltage)


\*Varies according to options and standards of the country to which the machine is delivered

\*\*\* With folded guardrail

### SE 1008 - Diagramma di carico



### SE 1008 - Disegno quotato

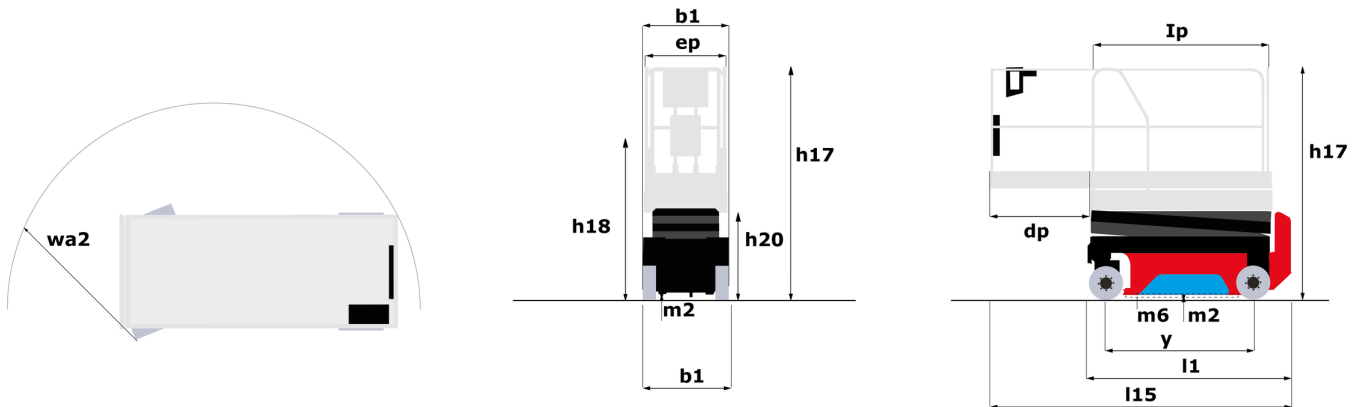

# Allestimento

## Standard

2 swing out component trays (hydraulic/electric)  
Audible alarm and illuminated indicator lamp (leveling, overload, lowering)  
Battery - 24V - 185Ah - semi-traction  
Battery charge indicator lamp  
CAN bus technology  
Colour screen with integrated diagnostics  
Descent alarm  
Easy Link with 2 year Service  
Electrical front wheel brake  
Emergency stop button in platform and on frame  
Folding rails with full height access gate  
Hom in the platform  
Hour meter  
Management of working height according to working place (indoor/outdoor)  
Manual emergency lowering  
Multi-voltage on-board charger - 24V - 30A - Single-phase  
Pothole protection with automatic operation  
Side and rear forklift pockets  
Sliding basket extension - 90 cm

## Opzionale

Audio warning on all motion  
Audio warning on translation  
Biodegradable hydraulic oil - Grade 32  
Easy Link - With access control keypad  
Easy link with remote lock  
Electric plug - 110 or 230V - In the basket - With differential circuit breaker - European type  
Safety kit - Harness + helmet  
Working light (x1) on basket



# **MANITOU** **HANDLING YOUR WORLD**

**Sede centrale**

MANITOU ITALIA Srl

Via Cristoforo Colombo 2, Loc. Cavazzona - 41013 CASTELFRANCO EMILIA (MO)

Tel: 059.95.98.11 - Fax 059.95.98.65

[www.manitou.com](http://www.manitou.com)



Questa pubblicazione presenta la descrizione delle versioni e delle possibilità di configurazione dei prodotti Manitou, che possono differire per attrezzature. Gli allestimenti presentati nel presente opuscolo possono essere di serie, optional o non disponibili, a seconda delle versioni. Manitou si riserva il diritto di modificare, in qualsiasi momento e senza alcun preavviso, le specifiche tecniche descritte e rappresentate. Le specifiche indicate non rappresentano alcun obbligo per il costruttore. Per maggiori dettagli, rivolgersi al proprio concessionario Manitou. Documento non contrattuale. Elenco delle specifiche non esaustivo. I loghi nonché l'identità visiva dell'azienda sono di proprietà di Manitou e non possono essere utilizzati senza autorizzazione. Tutti i diritti riservati. Le immagini e gli schemi contenuti nel presente opuscolo sono forniti esclusivamente a fini di consultazione e a titolo indicativo.

Manitou BF SA - Società anonima con consiglio di amministrazione. Capitale sociale: 39,668,399 euro - 857 802 508 RCS Nantes