

# SE 1212

OXYGEN




 **MANITOU**  
HANDLING YOUR WORLD




|        |         |   |
|--------|---------|---|
|        |         |   |
|        | h21     | 11.80 m   |
|        | h21     | 11.80 m   |
|        | h21'    | 11.80 m   |
|        | h7      | 9.80 m  |
|        | h7'     | 9.80 m  |
|        | Q       | 350 kg  |
|        |         | 115 kg  |
|        |         | 3 / 1   |
|        |         | 2880 kg   |
| ) x    | lp / ep | 2.20 m x 1.15 m   |
| x      |         | 3.10 m x 1.15 m   |
|        | h20     | 1.38 m  |
|        | l1      | 2.43 m  |
|        | b1      | 1.17 m  |
|        | h17     | 2.53 m  |
|        | h18 *** | 1.95 m  |
|        | dp      | 0.90 m  |
|        | l15     | 3.32 m  |
| -      | Wa2     | 2.33 m  |
|        |         | 0 m   |
|        | m6      | 0.02 m  |
|        | m2      | 0.08 m  |
|        | y       | 1.75 m  |
|        |         | 4.50 km/h   |
|        |         | 0.80 km/h   |
|        |         | 25 %  |
| /      |         | 3.50 ° / 1.50 °   |
|        |         | 15x5 381x125mm  |
| /      |         | 2 / 0   |
| /      |         | 2 / 0   |
| /      |         | 2 / 0   |
| /      |         | Lead acid   |
|        |         | 2 x 0.77 kW   |
|        |         | 48 V  |
| /      |         | 4 / 120 Ah  |
|        |         | 5.76 kWh  |
| V) / A |         | 24 V / 30 A   |
|        |         | 15.10 daN/cm2   |
|        |         | 250 bar   |
|        |         | 24 l  |
| (LpA)  |         | 66.60 dB  |
| /      |         | < 0.30 m/s <sup>2</sup>   |
|        |         | European directives: 2006/42/EC- Machinery<br>(revised EN280-1:2022) - 2004/108/EC (EMC) - EMC<br>according to EN 12895 / 2015 +A1 / 2019 |

\*

SE 1212 -

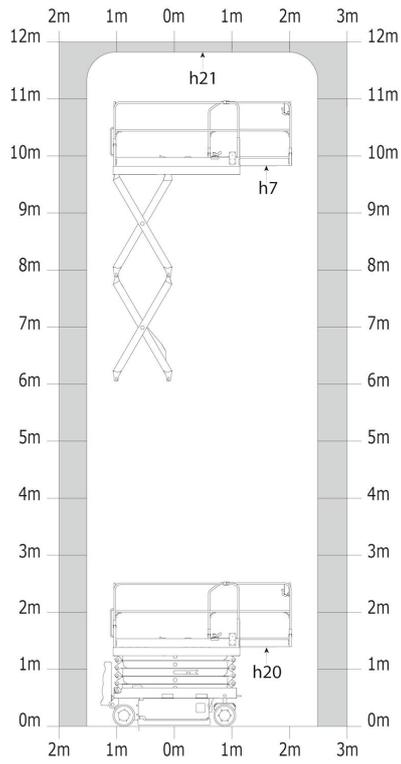


SE 1212 -

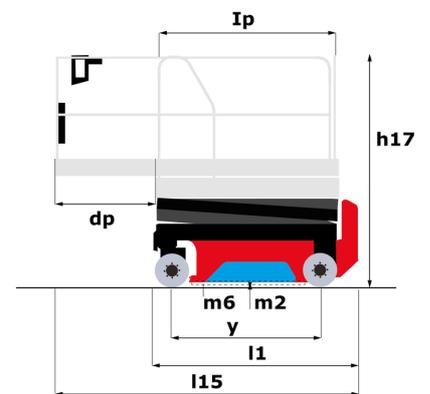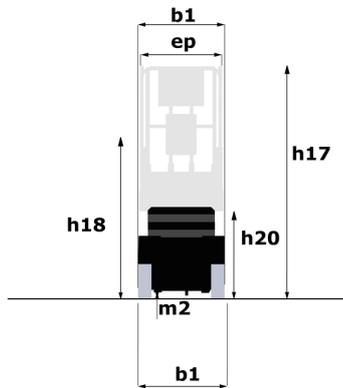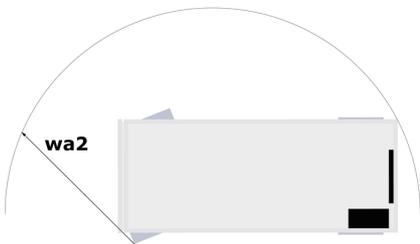

---

|   |
|---|
|   |
| 2   |
| Audible alarm and illuminated indicator lamp (leveling, overload, lowering) |
| Battery - 48V - 120Ah - semi-traction                                       |
| Battery charge indicator lamp   |
| CAN   |
| Easy Link 2   |
| Electrical front wheel brake  |
| Emergency stop button in platform and on frame                              |
| Pothole protection with automatic operation                                 |
| Sliding basket extension - 90 cm  |
|   |
|   |
| - 24V - 30A - IES - -   |
|   |
|   |
|   |

|                           |
|---------------------------|
|                           |
| Easy Link -               |
| Easy Link -               |
| LED -                     |
|                           |
|                           |
| -                         |
| - 32                      |
|                           |
| - 230V - - - Europe (E/F) |

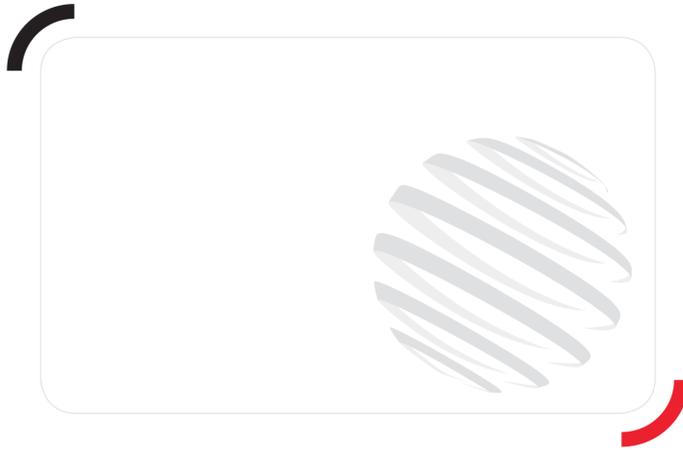

B.P. 249 - 430 rue de l'Aubinière  
44150 Ancenis Cedex - France  
+33 (0)2 40 09 10 11 - +33 (0)2 40 09 10 97  
[www.manitou.com](http://www.manitou.com)



Manitou

Manitou

MANITOU BF SA - - 39 668 399 - 857 802 508 RCS Nantes