

Technical sheet :

# ES 316 L P EASY


OXYGEN



 **MANITOU**  
HANDLING YOUR WORLD

Technical characteristics		Metric	
1.1	Manufacturer	MANITOU	
1.2	Model Name	ES 316 L P Easy	
1.3	Power source	Electrical - Lithium	
1.4	Operator type	Walking alongside	
1.5	Max. capacity	1600 kg	
1.51	Nominal capacity on wrapover forks	0 kg	
1.6	Load center of gravity	600 mm	
1.8	Load distance, centre of drive axle to fork (low/raised) - Low position / Raised position	768 mm / 700 mm	
1.9	Wheelbase	1469 mm	
1.9	Wheelbase (lower position)	1401 mm	
Weight		Weight	
2.1	Service weight	1200 kg	
2.2	Weight on front axle (laden) / rear axle (laden)	1100 kg / 1700 kg	
2.3	Weight on front axle (Unladen) / rear axle (Unladen)	850 kg / 350 kg	
Wheels		Wheels	
3.1	Tires type	Polyurethane cushion	
3.3	Number of load wheels / Size of load wheels	4 / 83X73	
3.4	Number of stabilizer wheels / Size of the stabilizer wheels	1 / 140X55	
3.5	Number of front wheels / rear wheels	2 / 4	
3.5.2	Number of drive wheels / Size of drive wheels	1/250X80	
3.6	Front wheel gauge	516 mm	
3.7	Rear wheel gauge	385 mm	
Dimensions		Dimensions	
4.10	Height of wheel arms	80 mm	
4.15	Fork height in low position	90 mm	
4.19.1	Overall length (folded platform / unfolded platform)	2088 mm / 2536 mm	
4.20.1	Length to face of forks (folded platform / unfolded platform)	938 mm / 1386 mm	
4.21	Overall width	800 mm	
4.22	Forks section / width / length	65 mm / 185 mm / 1150 mm	
4.24	Fork carriage width	680 mm	
4.25	Forks spread	570 mm	
4.32	Ground clearance at centre of wheelbase	15 mm	
4.34.1.1	Aisle Width for pallets 1000 x 1200 crossways (folded platform / unfolded platform)	2563 mm / 2998 mm	
4.34.2.1	Aisle width for 800 x 1200 pallet lengthways (folded platform / unfolded platform)	2509 mm / 2938 mm	
4.6	Initial lift	125 mm	
4.35.1	Turning radius (folded platform / unfolded platform)	1723 mm / 2157 mm	
4.9	Height tiller min. / max.	1170 mm / 1400 mm	
Performances		Performances	
5.1	Speed of travel laden (platform unfolded and arms unfolded) / unladen (platform unfolded and arms unfolded)	9 km/h / 11 km/h	
5.1	Travel speed (laden / unladen)	6 km/h / 6 km/h	
5.2	Lifting speed (laden / unladen)	0.18 m/s / 0.40 m/s	
5.3	Lowering speed (laden / unladen)	0.45 m/s / 0.40 m/s	
5.8	Max Gradeability (laden / unladen)	8 % / 16 %	
5.10	Service brake	Electro magnetic	
Engine		Engine	
6.1	Drive motor rating S2 60 min	2.20 kW	
6.2	Lift motor rating at S3 15%	4.20 kW	
6.4	Battery voltage / capacity	48 V / 105 Ah	
6.5	Battery weight (+/- 5%)	65 kg	

## ES 316 L P Easy - Dimensional drawing

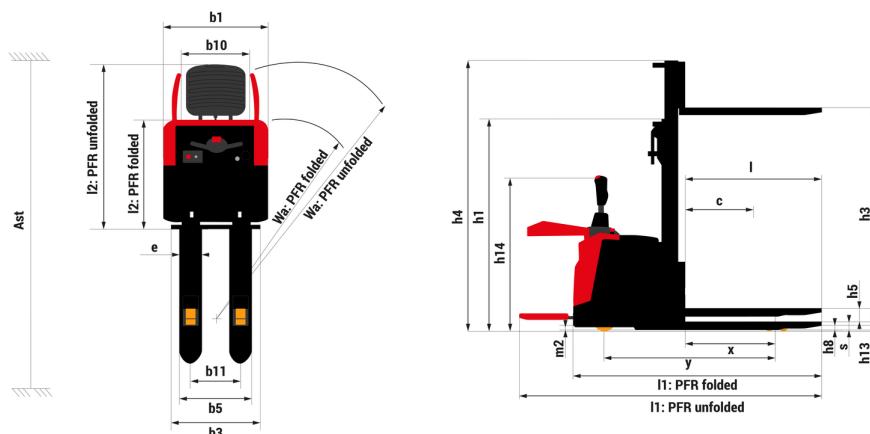

## Characteristics of masts and residual capacities

Full Visibility Duplex (FVD)		FVD 29	FVD 35
h1 - Mast lowered height	mm	1990	2290
h2 - Mast free lift	mm	90	90
h3 - Mast lifting height	mm	2900	3500
h4 - Mast extended height	mm	3440	4040
Residual capacity at max height	kg	1200	930
Height at max capacity	mm	2490	2490

Free Lift Triplex (FLT)		FLT 42	FLT 55
h1 - Mast lowered height	mm	1890	2330
h2 - Mast free lift	mm	1390	1830
h3 - Mast lifting height	mm	4200	5500
h4 - Mast extended height	mm	4720	6020
Residual capacity at max height	kg	780	480
Height at max capacity	mm	2490	2490

## Equipment

Standard
Anti-crushing safety device
Battery - 5.04kWh - Lithium-ion
Emergency stop
Onboard charger - 0.96kW AC - Lithium-ion - Single-phase
Pincode - On tiller
Polyurethane tandem-load wheels
Turboise button

Optional
Cold environment (from -28°C (-18°F))
External charger - 2.4kW AC - Lithium-ion - Single-phase
Key switch entry
Soft polyurethane drive wheel - 75 shore

**Head Office**

B.P. 249 - 430 rue de l'Aubinière  
44150 Ancenis Cedex - France  
Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97  
[www.manitou.com](http://www.manitou.com)



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes