

Technical sheet :

ES 316 L P EASY


OXYGEN



 **MANITOU**
HANDLING YOUR WORLD

	Technical characteristics		Imperial
1.1	Manufacturer		MANITOU
1.2	Model Name		ES 316 L P Easy
1.3	Power source		Electrical - Lithium
1.4	Operator type		Walking alongside
1.5	Max. capacity	Q	3527 lb
1.51	Nominal capacity on wrapover forks	Q	0 lb
1.6	Load center of gravity	c	24 in
1.8	Load distance, centre of drive axle to fork (low/raised) - Low position / Raised position	x / x	30 in / 28 in
1.9	Wheelbase	y	58 in
1.9	Wheelbase (lower position)	y	55 in
	Weight		
2.1	Service weight		2646 lb
2.2	Weight on front axle (laden) / rear axle (laden)		2425 lb / 3748 lb
2.3	Weight on front axle (Unladen) / rear axle (Unladen)		1874 lb / 772 lb
	Wheels		
3.1	Tires type		Polyurethane cushion
3.3	Number of load wheels / Size of load wheels		4 / 83X73
3.4	Number of stabilizer wheels / Size of the stabilizer wheels		1 / 140X55
3.5	Number of front wheels / rear wheels		2 / 4
3.5.2	Number of drive wheels / Size of drive wheels		1/250X80
3.6	Front wheel gauge	b10	20 in
3.7	Rear wheel gauge	b11	15 in
	Dimensions		
4.10	Height of wheel arms	h8	3 in
4.15	Fork height in low position	h13	4 in
4.19.1	Overall length (folded platform / unfolded platform)	l1 / l1	82 in / 100 in
4.20.1	Length to face of forks (folded platform / unfolded platform)	l2 / l2	37 in / 55 in
4.21	Overall width	b1	31 in
4.22	Forks section / width / length	s / e / l	3 in / 7 in / 45 in
4.24	Fork carriage width	b3	27 in
4.25	Forks spread	b5	22 in
4.32	Ground clearance at centre of wheelbase	m2	0.59 in
4.34.1.1	Aisle Width for pallets 1000 x 1200 crossways (folded platform / unfolded platform)	Ast / Ast	101 in / 118 in
4.34.2.1	Aisle width for 800 x 1200 pallet lengthways (folded platform / unfolded platform)	Ast / Ast	99 in / 116 in
4.6	Initial lift	h5	5 in
4.35.1	Turning radius (folded platform / unfolded platform)	Wa / Wa	68 in / 85 in
4.9	Height tiller min. / max.	h14 / h14	46 in / 55 in
	Performances		
5.1	Speed of travel laden (platform unfolded and arms unfolded) / unladen (platform unfolded and arms unfolded)		6 mph / 7 mph
5.1	Travel speed (laden / unladen)		4 mph / 4 mph
5.2	Lifting speed (laden / unladen)		0.59 ft/s / 1 ft/s
5.3	Lowering speed (laden / unladen)		1 ft/s / 1 ft/s
5.8	Max Gradeability (laden / unladen)		8 % / 16 %
5.10	Service brake		Electro magnetic
	Engine		
6.1	Drive motor rating S2 60 min		2.20 kW
6.2	Lift motor rating at S3 15%		4.20 kW
6.4	Battery voltage / capacity		48 V / 105 Ah
6.5	Battery weight (+/- 5%)		143 lb

ES 316 L P Easy - Dimensional drawing

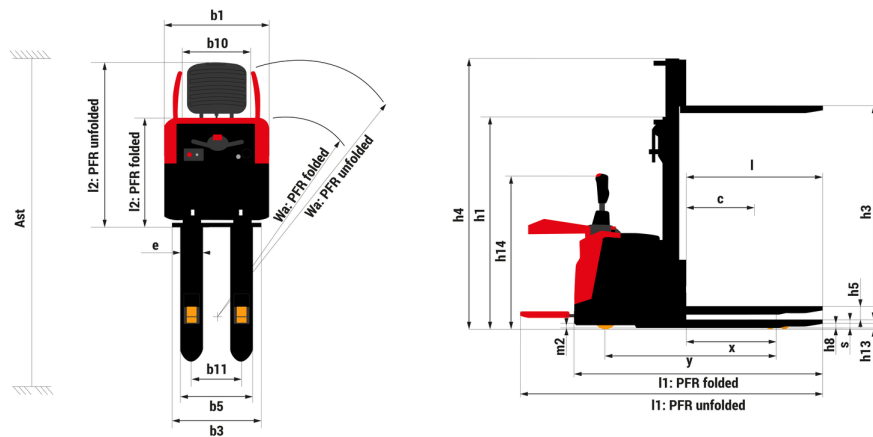

Characteristics of masts and residual capacities

Full Visibility Duplex (FVD)		FVD 29	FVD 35
h1 - Mast lowered height	in	78.3	90.2
h2 - Mast free lift	in	3.5	3.5
h3 - Mast lifting height	in	114.2	137.8
h4 - Mast extended height	in	135.4	159.1
Residual capacity at max height	lb	2646	2050
Height at max capacity	in	98	98

Free Lift Triplex (FLT)		FLT 42	FLT 55
h1 - Mast lowered height	in	74.4	91.7
h2 - Mast free lift	in	54.7	72
h3 - Mast lifting height	in	165.4	216.5
h4 - Mast extended height	in	185.8	237
Residual capacity at max height	lb	1720	1058
Height at max capacity	in	98	98

Equipment

Standard
Battery - 5.04kWh - Lithium-ion
Onboard charger - 0.96kW AC - Lithium-ion - Single-phase
Pincode - On tiller
Polyurethane tandem-load wheels

Optional
Cold environment (from -28°C (-18°F))
External charger - 2.4kW AC - Lithium-ion - Single-phase
Key switch entry
Soft polyurethane drive wheel - 75 shore



Head Office

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes