

Fiche technique :

# **MI-X 40 D FOB**


---



 **MANITOU**  
HANDLING YOUR WORLD

|       | Technical characteristics                                       |           | Métrique                         |
|-------|-----------------------------------------------------------------|-----------|----------------------------------|
| 1.1   | Manufacturer                                                    |           | Manitou                          |
| 1.2   | Model Name                                                      |           | MI-X 40 D FOB                    |
| 1.3   | Power source                                                    |           | Diesel                           |
| 1.4   | Operator type                                                   |           | Seated                           |
| 1.5   | Max. capacity                                                   | Q         | 4000 kg                          |
| 1.6   | Load center of gravity                                          | c         | 500 mm                           |
| 1.8   | Load distance, centre of drive axle to fork                     | x         | 550 mm                           |
| 1.9   | Wheelbase                                                       | y         | 2000 mm                          |
|       | <b>Weight</b>                                                   |           |                                  |
| 2.1   | Service weight                                                  |           | 6300 kg                          |
| 2.2   | Weight on front axle (laden) / rear axle (laden)                |           | 9000 kg / 1300 kg                |
| 2.3   | Weight on front axle (Unladen) / rear axle (Unladen)            |           | 2800 kg / 3500 kg                |
|       | <b>Wheels</b>                                                   |           |                                  |
| 3.1   | Tires type                                                      |           | Pneumatic                        |
| 3.2   | Dimensions of front wheels                                      |           | 5.25-15-14PR                     |
| 3.3   | Dimensions of rear wheels                                       |           | 7.00-12-12PR                     |
| 3.5   | Number of front wheels / rear wheels                            |           | 2 / 2                            |
| 3.5.2 | Number of drive wheels                                          |           | 2                                |
| 3.6   | Front wheel gauge                                               | b10       | 1160 mm                          |
| 3.7   | Rear wheel gauge                                                | b11       | 1130 mm                          |
|       | <b>Dimensions</b>                                               |           |                                  |
| 4.7   | Height of overhead guard (cabin)                                | h6        | 2390 mm                          |
| 4.8   | Seat height/stand height                                        | h7        | 1370 mm                          |
| 4.12  | Height of towing bar (coupling height)                          | h10       | 445 mm                           |
| 4.19  | Overall length                                                  | l1        | 4290 mm                          |
| 4.20  | Length to face of forks                                         | l2        | 3070 mm                          |
| 4.21  | Overall width                                                   | b1        | 1395 mm                          |
| 4.21  | Overall width - Single wheels                                   | b1        | 1395 mm                          |
| 4.21  | Overall width - Twinned wheels                                  | b1        | 1940 mm                          |
| 4.22  | Forks section / width / length                                  | s / e / l | 50 mm x 122 mm x 1220 mm         |
| 4.23  | Fork carriage ISO 2328 (class/form) A/B                         |           | 3A                               |
| 4.24  | Fork carriage width                                             | b3        | 1250 mm                          |
| 4.31  | Ground clearance below mast                                     | m1        | 170 mm                           |
| 4.32  | Ground clearance at centre of wheelbase                         | m2        | 230 mm                           |
| 4.33  | Aisle Width for pallets 1000 x 1200 crossways                   | Ast       | 4642 mm                          |
| 4.34  | Aisle width for 800 x 1200 pallet lengthways                    | Ast       | 4775 mm                          |
| 4.35  | Turning radius                                                  | Wa        | 2780 mm                          |
| 4.36  | Internal turning radius (over tyres)                            | b13       | 135 mm                           |
|       | <b>Performances</b>                                             |           |                                  |
| 5.1   | Travel speed (laden / unladen)                                  |           | 22 km/h-24 km/h                  |
| 5.2   | Lifting speed (laden / unladen)                                 |           | 0.46 m/s-0.48 m/s                |
| 5.3   | Lowering speed (laden / unladen)                                |           | 0.50 m/s-0.50 m/s                |
| 5.5   | Drawbar pull (Laden / Unladen)                                  |           | 3800 daN / 2200 daN              |
| 5.7   | Gradeability (laden / unladen)                                  |           | 35 % / 37 %                      |
| 5.10  | Service brake                                                   |           | Hydraulic                        |
|       | <b>Engine</b>                                                   |           |                                  |
| 7.1   | Engine brand / model / norm                                     |           | Perkins / 1104 D 44 / Stage IIIA |
| 7.2   | Engine power according to ISO 1585                              |           | 56 kW                            |
| 7.3   | Rated speed                                                     |           | 2200 rpm                         |
| 7.4   | Number of cylinders / Capacity of cylinders                     |           | 4 - 4400 cm³                     |
|       | <b>Miscellaneous</b>                                            |           |                                  |
| 8.2   | Working hydraulic pressure for attachments                      |           | 160 bar                          |
| 8.3   | Oil flow rate for attachments                                   |           | 90 l/min                         |
| 8.4   | Measured/guaranteed mean noise level at the ear of the operator |           | < 87 dB                          |
| 8.4   | Sound level at the driver's ear according to DIN 12 053         |           | 87 dB                            |

## MI-X 40 D FOB - Schémas d'encombrement

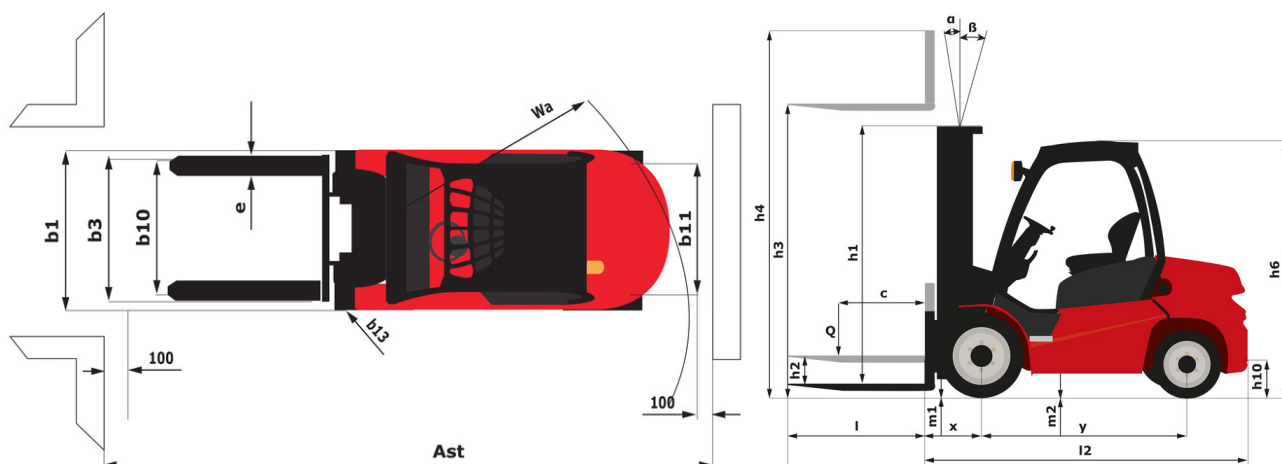

## Caractéristiques des mâts et capacités résiduelles

| Full Visibility Duplex (FVD)                               |    | FVD 30 | FVD 33 | FVD 35 | FVD 37 | FVD 40 | FVD 45 | FVD 50 |
|------------------------------------------------------------|----|--------|--------|--------|--------|--------|--------|--------|
| Mast/fork carriage tilt, forward                           | °  | 6      | 6      | 6      | 6      | 6      | 6      | 6      |
| Mast/fork carriage tilt, backward                          | °  | 12     | 12     | 12     | 12     | 12     | 6      | 6      |
| h1 - Mast lowered height                                   | mm | 2245   | 2395   | 2495   | 2595   | 2795   | 3070   | 3345   |
| h2 - Mast free lift                                        | mm | 160    | 160    | 160    | 160    | 160    | 160    | 160    |
| h3 - Mast lifting height                                   | mm | 3000   | 3300   | 3500   | 3700   | 4000   | 4500   | 5000   |
| h4 - Mast extended height                                  | mm | 4170   | 4470   | 4670   | 4870   | 5170   | 5670   | 6170   |
| Residual capacity at max height                            | kg | 4000   | 4000   | 4000   | 4000   | 4000   | 3700   | 3200   |
| Residual capacity with integrated side shift at max height | kg | 4000   | 4000   | 4000   | 4000   | 4000   | 3600   | 3100   |
| Height at max capacity                                     | mm | 3000   | 3300   | 3500   | 3700   | 4000   | 4000   | 4000   |
| Height at max capacity with integrated sideshift           | mm | 3000   | 3300   | 3500   | 3700   | 4000   | 4000   | 4000   |

| Free Lift Duplex (FLD)                                     |    | FLD 30 | FLD 33 | FLD 35 | FLD 37 |
|------------------------------------------------------------|----|--------|--------|--------|--------|
| Mast/fork carriage tilt, forward                           | °  | 6      | 6      | 6      | 6      |
| Mast/fork carriage tilt, backward                          | °  | 12     | 12     | 12     | 12     |
| h1 - Mast lowered height                                   | mm | 2226   | 2376   | 2476   | 2576   |
| h2 - Mast free lift                                        | mm | 1364   | 1514   | 1614   | 1714   |
| h3 - Mast lifting height                                   | mm | 3000   | 3300   | 3500   | 3700   |
| h4 - Mast extended height                                  | mm | 4170   | 4470   | 4670   | 4870   |
| Residual capacity at max height                            | kg | 4000   | 4000   | 4000   | 4000   |
| Residual capacity with integrated side shift at max height | kg | 4000   | 4000   | 4000   | 4000   |
| Height at max capacity                                     | mm | 3000   | 3300   | 3500   | 3700   |
| Height at max capacity with integrated sideshift           | mm | 3000   | 3300   | 3500   | 3700   |

| Free Lift Triplex (FLT)                                    |    | FLT 40 | FLT 43 | FLT 45 | FLT 47 | FLT 50 | FLT 55 | FLT 60 |
|------------------------------------------------------------|----|--------|--------|--------|--------|--------|--------|--------|
| Mast/fork carriage tilt, forward                           | °  | 6      | 6      | 6      | 6      | 6      | 3      | 3      |
| Mast/fork carriage tilt, backward                          | °  | 12     | 6      | 6      | 6      | 6      | 6      | 6      |
| h1 - Mast lowered height                                   | mm | 2080   | 2180   | 2248   | 2310   | 2410   | 2575   | 2790   |
| h2 - Mast free lift                                        | mm | 1229   | 1329   | 1395   | 1459   | 1559   | 1724   | 1939   |
| h3 - Mast lifting height                                   | mm | 4000   | 4300   | 4500   | 4700   | 5000   | 5500   | 6000   |
| h4 - Mast extended height                                  | mm | 5170   | 5470   | 5685   | 5870   | 6170   | 6670   | 7180   |
| Residual capacity at max height                            | kg | 4000   | 3900   | 3500   | 3300   | 3100   | 2800   | 2300   |
| Residual capacity with integrated side shift at max height | kg | 3900   | 3800   | 3400   | 3200   | 3000   | 2700   | 2200   |
| Height at max capacity                                     | mm | 4000   | 2500   | 4000   | 4000   | 4000   | 2500   | 2500   |



**Siège Social**

B.P. 249 - 430 rue de l'Aubinière  
44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



Cette publication présente le descriptif des versions et possibilités de configuration des produits Manitou qui peuvent différer en équipement. Les équipements présentés dans cette brochure peuvent être de série, en option, ou non disponibles suivant les versions. Manitou se réserve le droit, à tout moment et sans préavis, de modifier les spécifications décrites et représentées. Les spécifications portées n'engagent pas le constructeur. Pour plus de détails, contactez votre concessionnaire Manitou. Document non contractuel. Présentation des produits non contractuelle. Liste des spécifications non exhaustive. Les logos ainsi que l'identité visuelle de l'entreprise sont la propriété de Manitou et ne peuvent être utilisés sans autorisation. Tous droits réservés. Les photos et schémas contenus dans la présente brochure ne sont fournis qu'à des fins de consultation et à titre indicatif.

Manitou BF SA - Société anonyme à conseil d'administration - Capital social : 39 668 399 euros - 857 802 508 RCS Nantes