

Technical sheet :




# **MHT 790 MINING ST5**



 **MANITOU**  
HANDLING YOUR WORLD


Capacities		Metric
Max. capacity		9000 kg
Load center of gravity	c	600 mm
Max. lifting height		6.80 m
Maximum outreach		3.70 m
Weight and dimensions		
Overall length	l1	6.41 m
Unladen weight (with forks)		13160 kg
Ground clearance	m4	0.44 m
Wheelbase	y	2.87 m
Length to face of forks	l2	5.21 m
Overall width	b1	2.47 m
Overall height	h17	2.50 m
Overall cab width	b4	0.93 m
Tilt-up angle	a4	12 °
Tilt-down angle	a5	125 °
External turning radius (over tyres)	Wa1	4.89 m
Forks length / width / section	l / e / s	1200 mm x 200 mm x 60 mm
Wheels		
Standard tires		445/65 R22,5
Number of front wheels / rear wheels		2 / 2
Steering wheels (front / rear)		2 / 2
Drive wheels (front / rear)		2 / 2
Steering mode		2 wheel steer, 4 wheel steer, Crab mode
Engine		
Engine brand		Yanmar
Engine norm		Stage V, Tier 4
Engine model		4TN107HT-5SMUF
Number of cylinders / Capacity of cylinders		4 - 4567 cm³
Engine power (Hp / kW)		143 Hp / 105 kW
Max. torque / Engine rotation		602 Nm@1500 rpm
Engine cooling system		Water
Battery voltage		12 V
Drawbar pull		10905 daN
Transmission		
Transmission type		Hydrostatic
Number of gears (forward / reverse)		2 / 2
Max. travel speed		35 km/h
Parking brake		Automatic negative parking brake
Service brake		Oil-immersed multi-discs braking on front & rear axles
Hydraulics		
Hydraulic pump type		Variable displacement pump
Hydraulic flow - Pressure		185 l/min - 270 bar
Tank capacities		
Engine oil		13 l
Hydraulic oil		151 l
Fuel		165 l
Noise and vibration		
Noise to environment (LwA)		103 dB
Vibration on hands/arms		2.50 m/s²
Miscellaneous		
Safety / Cab certification		Standard EN 15000 - Cabin ROPS - FOPS level 2
Controls		JSM

## MHT 790 Mining ST5 - Dimensional drawing

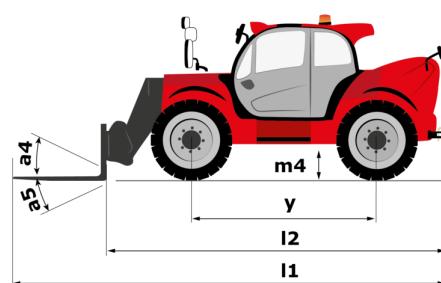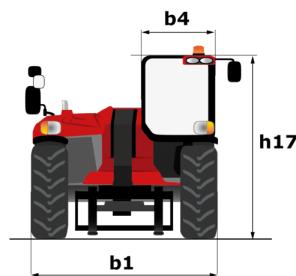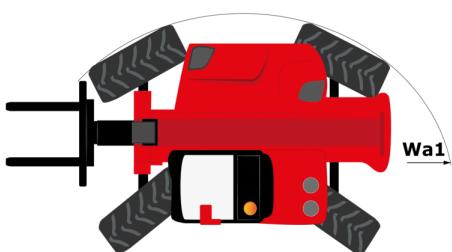


## MHT 790 Mining ST5 - Load chart


Machine on tires with forks LC 600 mm Metric

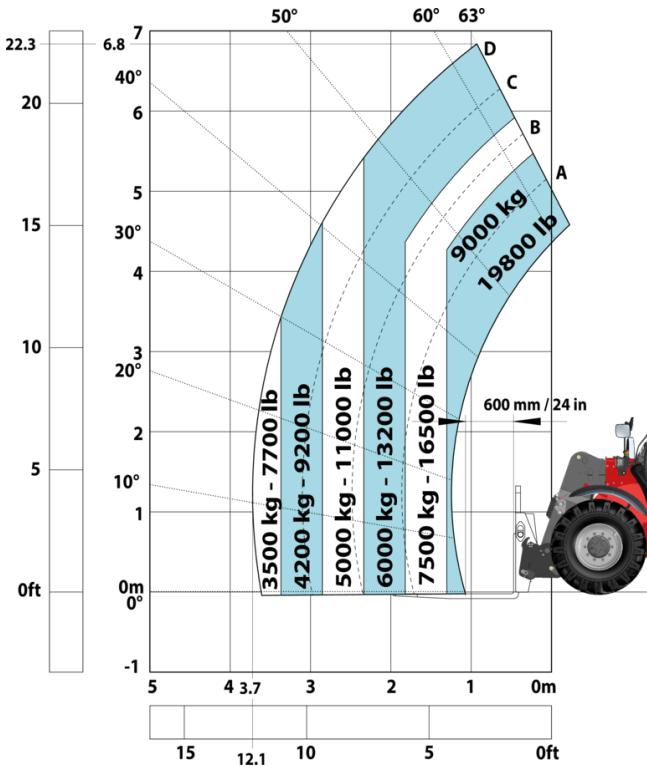


Machine on tires with winch 9000 kg (Metric)

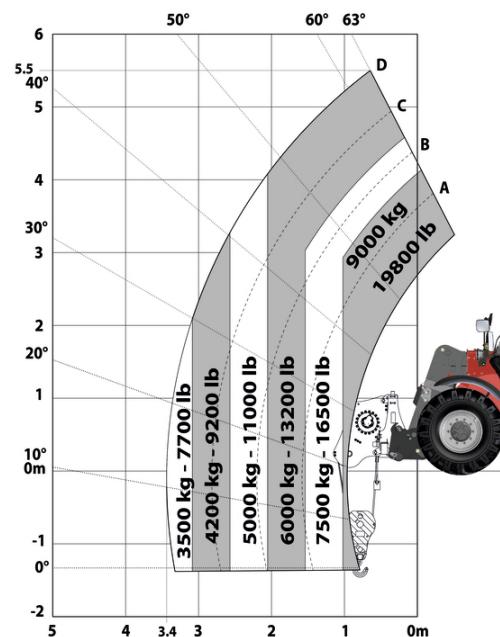


Machine on tires with 3-hook jib 9000 kg (Metric)

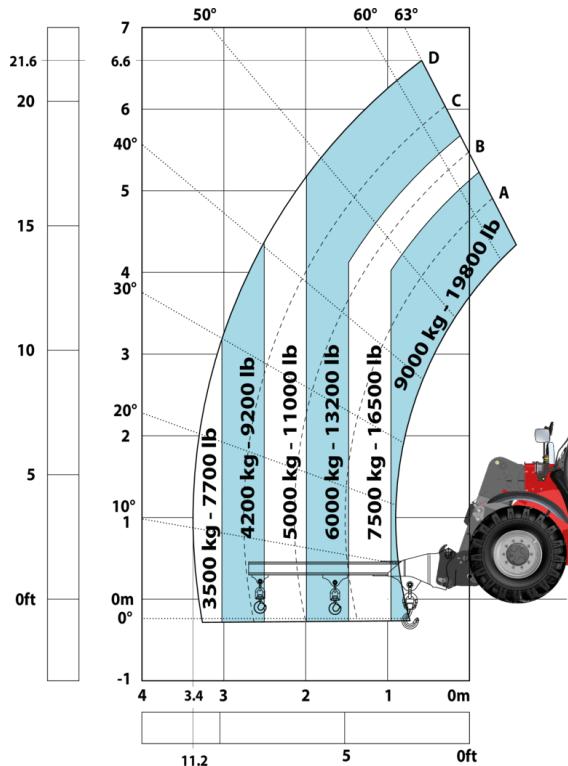


Machine on tires with platform Metric

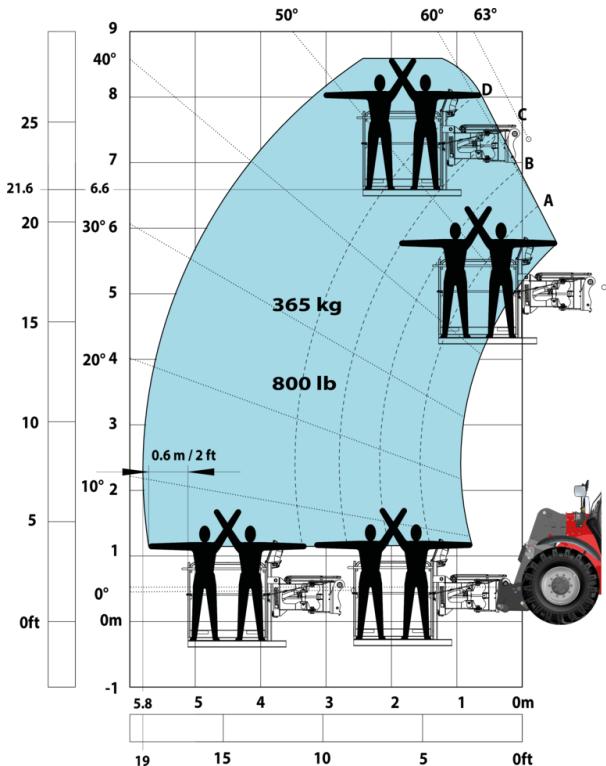


Machine on tires with underground mining platform (Metric)

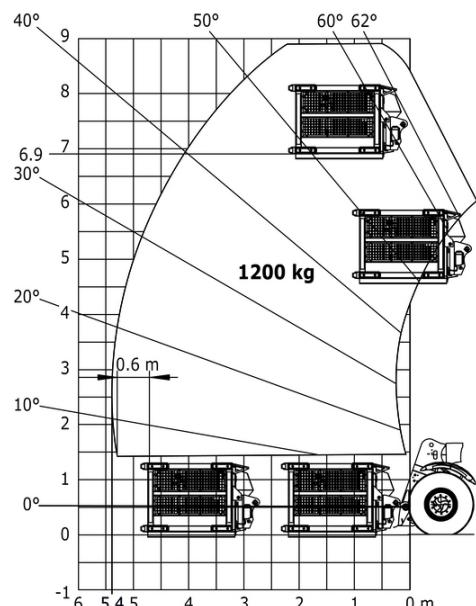


Machine on tires with tire handler TH 35 (Metric)

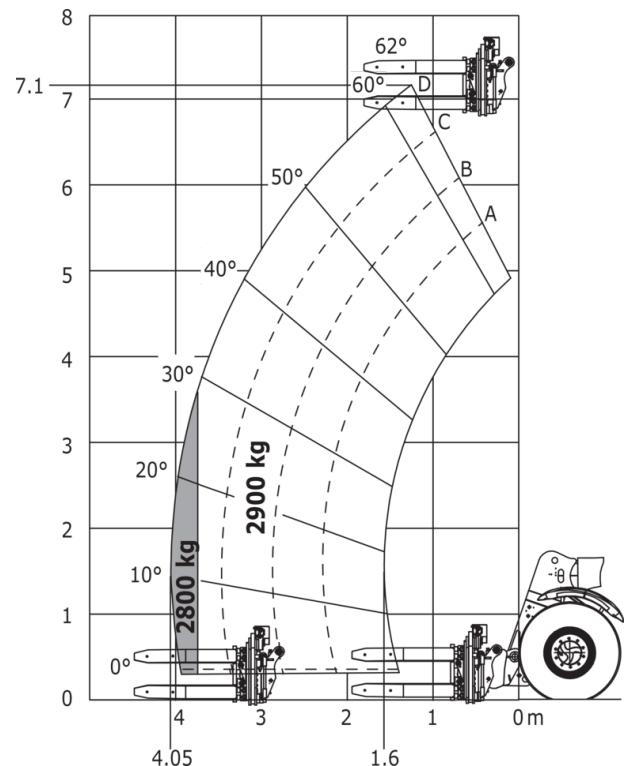


Machine on tires with tire handler TH 49 (Metric)

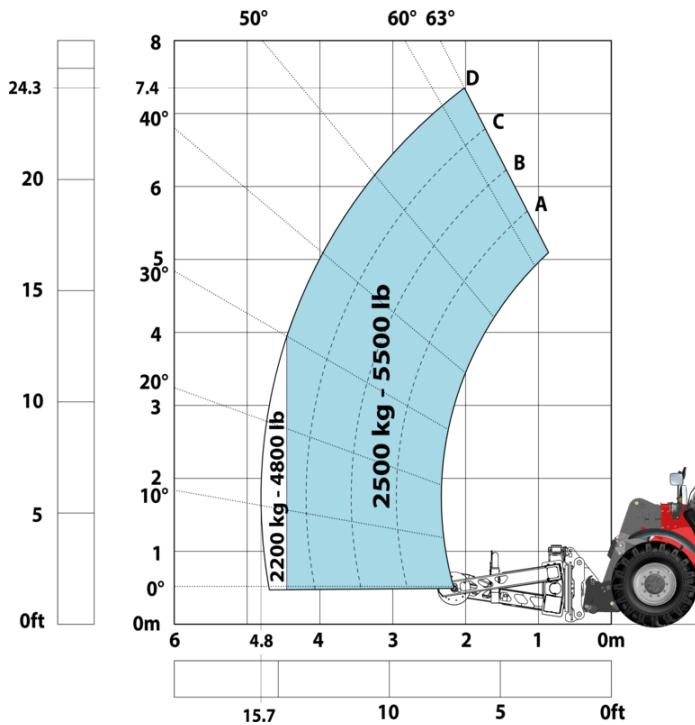

Machine on tires with tire handler TH 51 (Metric)

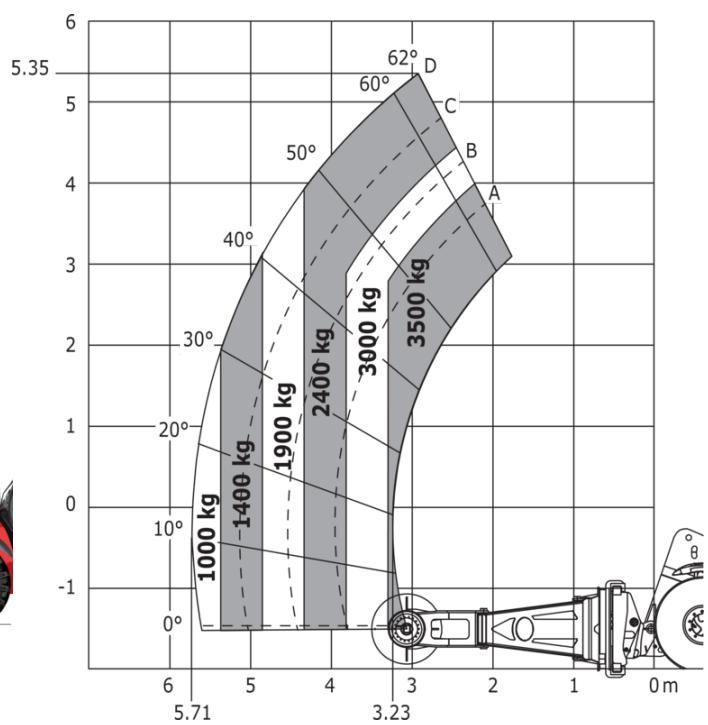

## Machine on tires with cylinder handler CH 4 (Metric)

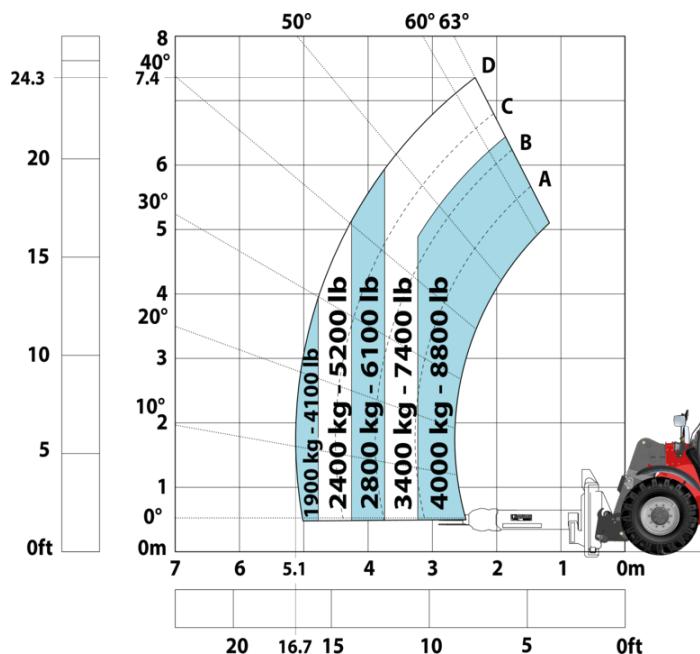

# Mining Specifications

	MHT 790 Mining ST5
<b>Lifting function</b>	
Camera in boom head with screen in cab	O
Clamp predisposition (controls from cabin)	S
Comfort Ride Control (CRC) boom suspension	O
Working platform predisposition with remote control	S
<b>Lighting</b>	S
Brake Lights ON When Park Brake ON	S
Flat Led Rotating Beacon	S
LED Flashing Lights On Cabin (Marker Lights)	S
LED tramping lights	S
LED work lights - On the top of the boom (fixed part) (x2)	S
LED working lights on cab (x4 : 2 front + 2 rear)	S
<b>Motorization/Power</b>	S
Hydraulic hose sleeve burst protection	O
Metal cyclonic prefilter	S
Radiator safety cap	S
<b>Operator station</b>	S
Roof and Windshield Guard	S
<b>Other options</b>	S
Battery + Starter Isolators + Jump Start Receptacle	S
Stainless steel tool box	S
<b>Pneumatics</b>	O
Steel mudguards	S
<b>Secondary functions</b>	O
Automatic greasing system (AGS) - Chassis + boom	O
Fast fuel filling system	O
<b>Security</b>	S
"Guardian Angel" System Level 1	S
360° visibility safety system	S
Boom cylinder lock	S
Emergency steering	S
Emergency stop by safety valve	O
Emergency stop: 1 in cab, 2 on external	S
Engine compartment fire prevention kit	O
Extinguisher brackets (x3)	S
Fire suppression system	O
Fuse board protection - MHT's	S
High visibility reflective strips	S
Loose wheel nut indicators	S
Marking - Warning & Danger decals	S
Mining protection grids: right, left and back windows	S
Negative brakes on front & rear axles	S
Rear bumper	O
Right side bumper	O
Steel Protection Guards on all working and road lights	S
System with attachments recognition (E-reco)	S
Wheel chocks	S


# Equipment

## Standard

- "Guardian Angel" System Level 1
- 360° visibility safety system
- Battery + Starter Isolators + Jump Start Receptacle
- Boom cylinder lock
- Brake Lights ON When Park Brake ON
- Clamp predisposition (controls from cabin)
- Emergency steering
- Emergency stop: 1 in cab, 2 on external
- Extinguisher brackets (x3)
- Flat Led Rotating Beacon
- Fuse board protection - MHT's
- High visibility reflective strips
- LED Flashing Lights On Cabin (Marker Lights)
- LED tramping lights
- LED work lights - On the top of the boom (fixed part) (x2)
- LED working lights on cab (x4 : 2 front + 2 rear)
- Loose wheel nut indicators
- Marking - Waming & Danger decals
- Metal cyclonic prefilter
- Mining protection grids: right, left and back windows
- Negative brakes on front & rear axles
- Radiator safety cap
- Roof and Windshield Guard
- Stainless steel tool box
- Steel Protection Guards on all working and road lights
- System with attachments recognition (E-reco)
- Wheel chocks
- Working platform predisposition with remote control

## Optional

- Automatic greasing system (AGS) - Chassis + boom
- Camera in boom head with screen in cab
- Comfort Ride Control (CRC) boom suspension
- Emergency stop by safety valve
- Engine compartment fire prevention kit
- Fast fuel filling system
- Fire suppression system
- Hydraulic hose sleeve burst protection
- Rear bumper
- Right side bumper
- Steel mudguards

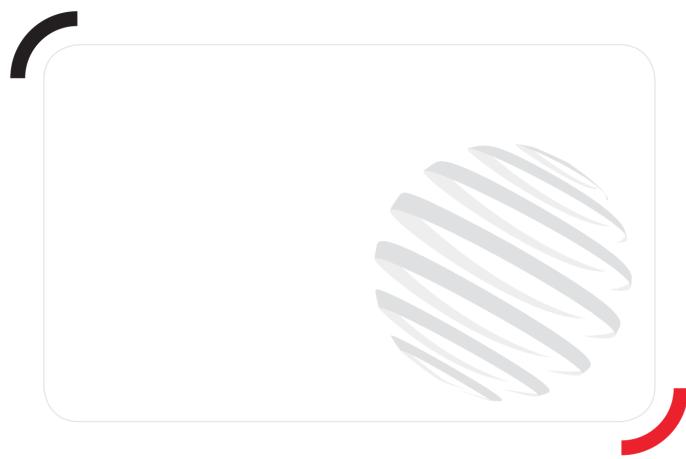

# **MANITOU** HANDLING YOUR WORLD

## Head Office

B.P. 249 - 430 rue de l'Aubinière  
44150 Ancenis Cedex - France  
Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97  
[www.manitou.com](http://www.manitou.com)



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes