

Scheda tecnica :


# MHT 790 MINING ST5



 **MANITOU**  
HANDLING YOUR WORLD


| Capacities                                  |           | Metrico                                                |
|---------------------------------------------|-----------|--------------------------------------------------------|
| Max. capacity                               |           | 9000 kg                                                |
| Load center of gravity                      | c         | 600 mm                                                 |
| Max. lifting height                         |           | 6.80 m                                                 |
| Max. outreach                               |           | 3.70 m                                                 |
| Weight and dimensions                       |           |                                                        |
| Overall length                              | l1        | 6.41 m                                                 |
| Unladen weight (with forks)                 |           | 13160 kg                                               |
| Ground clearance                            | m4        | 0.44 m                                                 |
| Wheelbase                                   | y         | 2.87 m                                                 |
| Length to face of forks                     | l2        | 5.21 m                                                 |
| Overall width                               | b1        | 2.47 m                                                 |
| Overall height                              | h17       | 2.50 m                                                 |
| Overall cab width                           | b4        | 0.93 m                                                 |
| Tilt-down angle                             | a5        | 125 °                                                  |
| Tilt-up angle                               | a4        | 12 °                                                   |
| External turning radius (over tyres)        | Wa1       | 4.89 m                                                 |
| Forks length / width / section              | l / e / s | 1200 mm x 200 mm / 60 mm                               |
| Wheels                                      |           |                                                        |
| Standard tires                              |           | 445/65 R22,5                                           |
| Number of front wheels / rear wheels        |           | 2 / 2                                                  |
| Steering wheels (front / rear)              |           | 2 / 2                                                  |
| Drive wheels (front / rear)                 |           | 2 / 2                                                  |
| Steering mode                               |           | 2 wheel steer, 4 wheel steer, Crab mode                |
| Engine                                      |           |                                                        |
| Engine brand                                |           | Yanmar                                                 |
| Engine norm                                 |           | Stage V / Tier 4                                       |
| Engine model                                |           | 4TN107HT-5SMUF                                         |
| Number of cylinders / Capacity of cylinders |           | 4 - 4567 cm³                                           |
| I.C. Engine power rating / Power            |           | 143 Hp / 105 kW                                        |
| Max. torque / Engine rotation               |           | 602 Nm@1500 rpm                                        |
| Engine cooling system                       |           | Water                                                  |
| Battery voltage                             |           | 12 V                                                   |
| Drawbar pull                                |           | 10905 daN                                              |
| Transmission                                |           |                                                        |
| Transmission type                           |           | Hydrostatic                                            |
| Number of gears (forward / reverse)         |           | 2 / 2                                                  |
| Max. travel speed                           |           | 35 km/h                                                |
| Parking brake                               |           | Automatic negative parking brake                       |
| Service brake                               |           | Oil-immersed multi-discs braking on front & rear axles |
| Hydraulics                                  |           |                                                        |
| Hydraulic pump type                         |           | Variable displacement pump                             |
| Hydraulic flow - Pressure                   |           | 185 l/min - 270 bar                                    |
| Tank capacities                             |           |                                                        |
| Engine oil                                  |           | 13 l                                                   |
| Hydraulic oil                               |           | 151 l                                                  |
| Fuel tank                                   |           | 165 l                                                  |
| Noise and vibration                         |           |                                                        |
| Noise at driving position (LpA)             |           | 79.70 dB                                               |
| Noise to environment (LwA)                  |           | 103 dB                                                 |
| Vibration on hands/arms                     |           | < 2.50 m/s²                                            |
| Miscellaneous                               |           |                                                        |
| Safety / Safety cab homologation            |           | Standard EN 15000 - ROPS - FOPS level 2 cab            |
| Controls                                    |           | JSM                                                    |

MHT 790 Mining ST5 - Disegno quotato

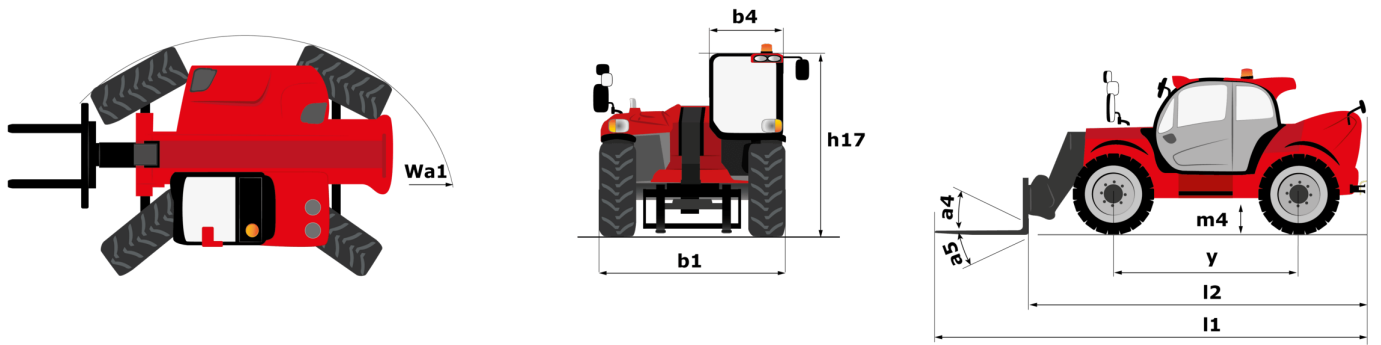


## MHT 790 Mining ST5 - Diagramma di carico


Machine on tyres with forks LC 600 mm Metric

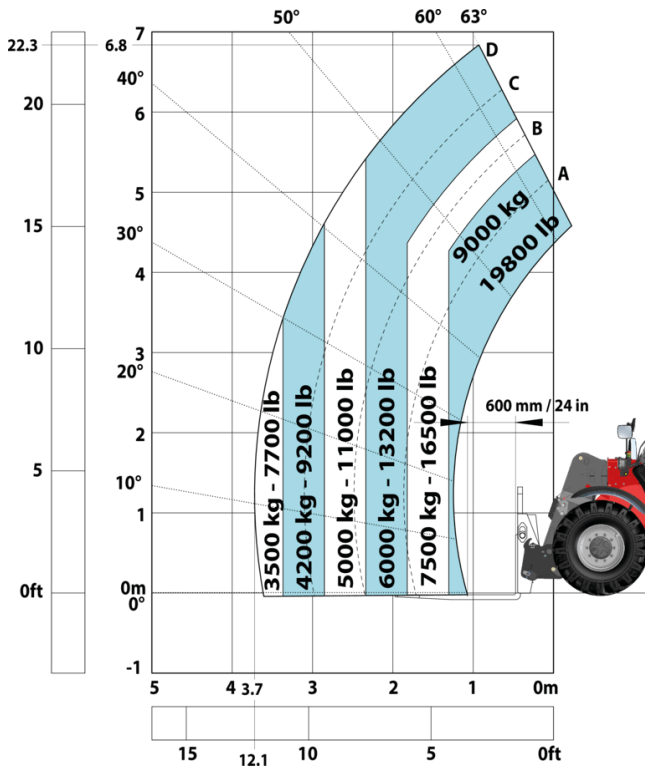


Machine on tyres with winch 9000 kg (Metric)

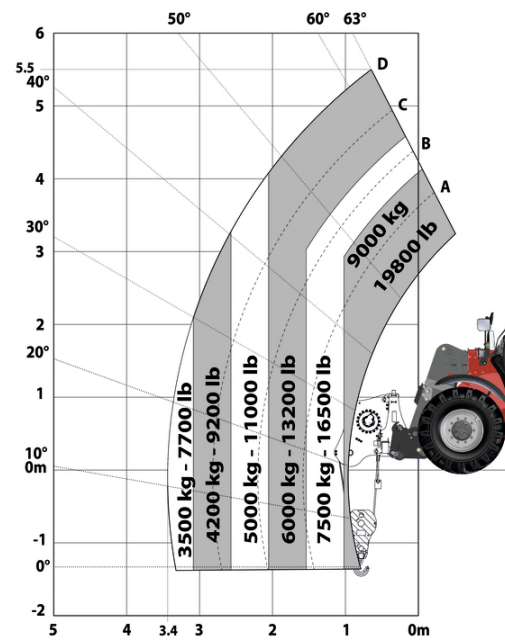


Machine on tyres with 3-hook jib 9000 kg (Metric)

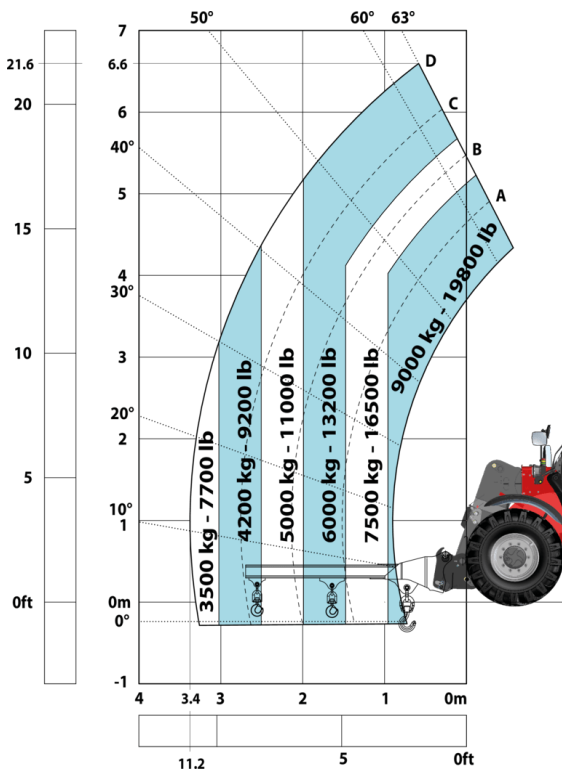


Machine on tyres with platform Metric

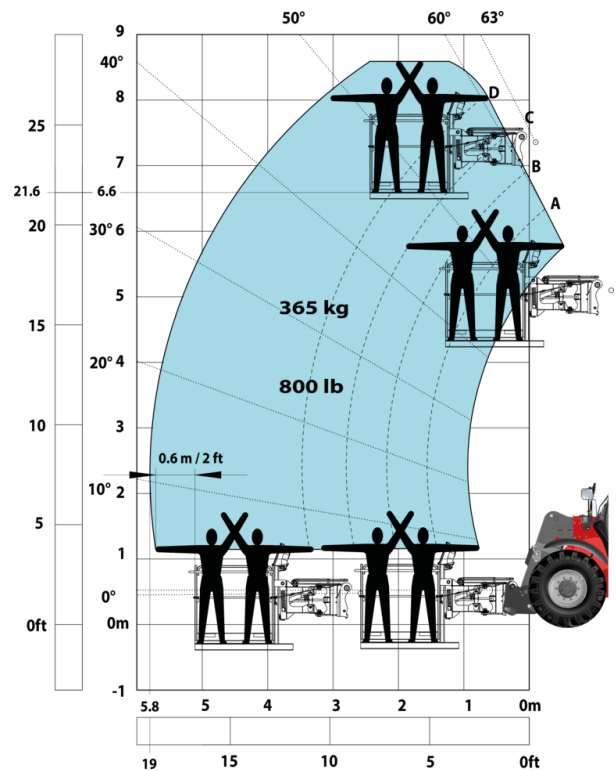


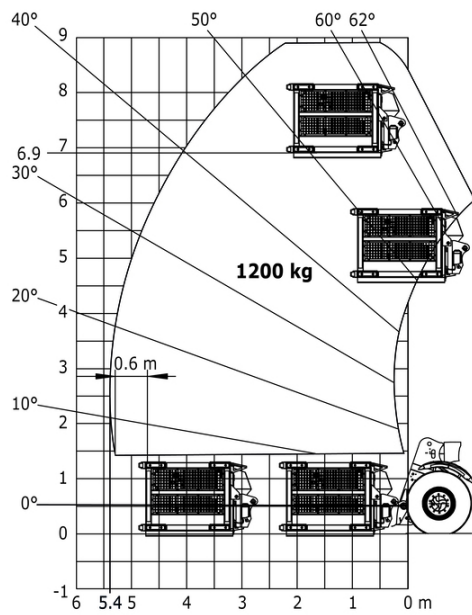Machine on tyres with underground mining platform  
(Metric)


Machine on tyres with tyre handler TH 35 (Metric)

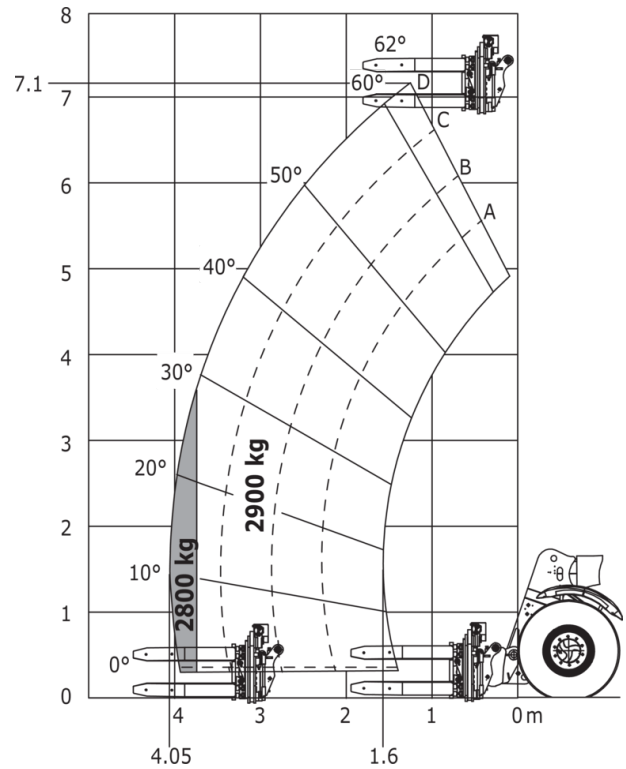


Machine on tyres with tyre handler TH 49 (Metric)

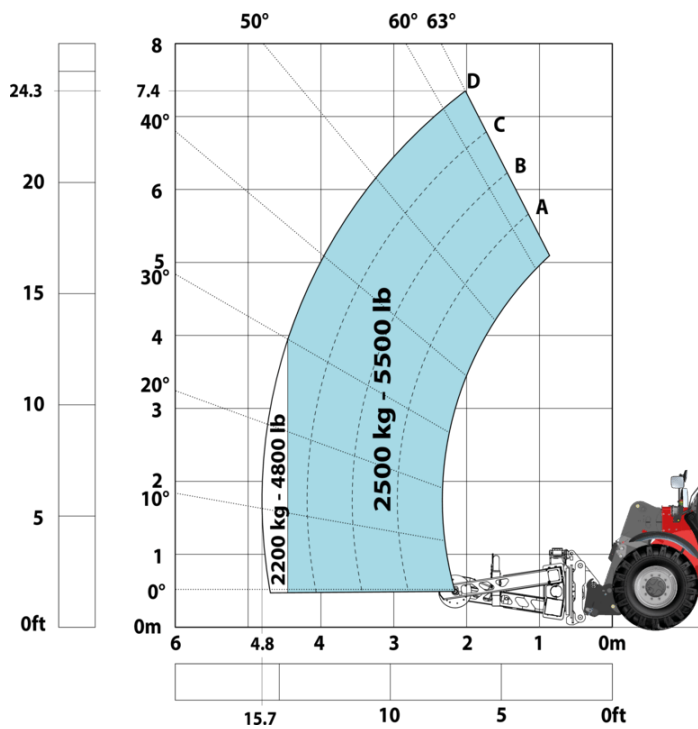

Machine on tyres with tyre handler TH 51 (Metric)

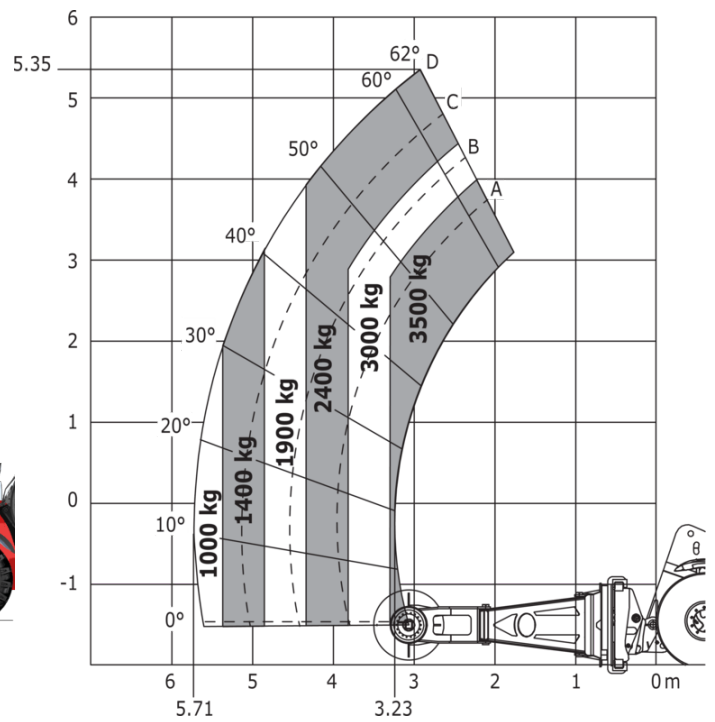

## Machine on tyres with cylinder handler CH 4 (Metric)

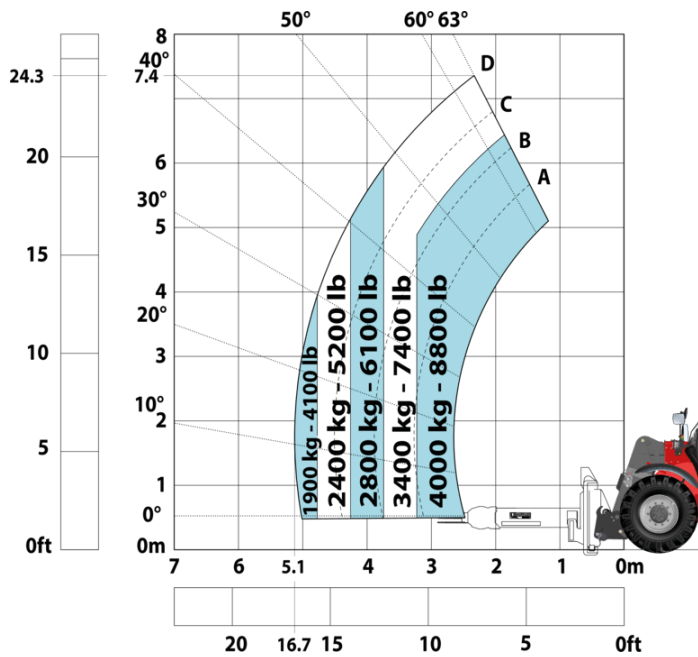

## Mining Specifications

|                                                        | MHT 790 Mining ST5 |
|--------------------------------------------------------|--------------------|
| <b>Lifting function</b>                                |                    |
| Camera in boom head with screen in cab                 | 0                  |
| Clamp predisposition (controls from cabin)             | S                  |
| Comfort Ride Control (CRC) boom suspension             | 0                  |
| Working platform predisposition with remote control    | S                  |
| <b>Lighting</b>                                        |                    |
| Brake Lights ON When Park Brake ON                     | S                  |
| Flat Led Rotating Beacon                               | S                  |
| LED Flashing Lights On Cabin (Marker Lights)           | S                  |
| LED tramming lights                                    | S                  |
| LED work lights on the boom (x2)                       | S                  |
| LED working lights on cab (x4 : 2 front + 2 rear)      | S                  |
| <b>Motorization/Power</b>                              |                    |
| Hydraulic hose sleeve burst protection                 | 0                  |
| Radiator safety cap                                    | S                  |
| <b>Operator station</b>                                |                    |
| Roof and Windshield Guard                              | S                  |
| <b>Other options</b>                                   |                    |
| Battery + Starter Isolators + Jump Start Receptacle    | S                  |
| Stainless steel tool box                               | S                  |
| <b>Secondary functions</b>                             |                    |
| Automatic Greasing System (AGS) - chassis + boom       | 0                  |
| <b>Security</b>                                        |                    |
| "Guardian Angel" System Level 1                        | S                  |
| 360° visibility safety system                          | S                  |
| Boom cylinder lock                                     | S                  |
| Emergency steering                                     | S                  |
| Emergency stop: 1 in cab, 2 on external                | S                  |
| Extinguisher brackets (x3)                             | S                  |
| Fire suppression system                                | 0                  |
| Fuse board protection - MHT's                          | S                  |
| High visibility reflective strips                      | S                  |
| Loose wheel nut indicators                             | S                  |
| Marking - Warning & Danger decals                      | S                  |
| Mining protection grids: right, left and back windows  | S                  |
| Negative brakes on front & rear axles                  | S                  |
| Steel Protection Guards on all working and road lights | S                  |
| System with attachments recognition (E-reco)           | S                  |
| Wheel chocks                                           | S                  |

# Allestimento

| Standard                                               |
|--------------------------------------------------------|
| "Guardian Angel" System Level 1                        |
| 360° visibility safety system                          |
| Battery + Starter Isolators + Jump Start Receptacle    |
| Boom cylinder lock                                     |
| Brake Lights ON When Park Brake ON                     |
| Clamp predisposition (controls from cabin)             |
| Emergency steering                                     |
| Emergency stop: 1 in cab, 2 on external                |
| Extinguisher brackets (x3)                             |
| Flat Led Rotating Beacon                               |
| Fuse board protection - MHT's                          |
| High visibility reflective strips                      |
| LED Flashing Lights On Cabin (Marker Lights)           |
| LED tramming lights                                    |
| LED work lights on the boom (x2)                       |
| LED working lights on cab (x4 : 2 front + 2 rear)      |
| Loose wheel nut indicators                             |
| Marking - Warning & Danger decals                      |
| Mining protection grids: right, left and back windows  |
| Negative brakes on front & rear axles                  |
| Radiator safety cap                                    |
| Roof and Windshield Guard                              |
| Stainless steel tool box                               |
| Steel Protection Guards on all working and road lights |
| System with attachments recognition (E-reco)           |
| Wheel chocks                                           |
| Working platform predisposition with remote control    |

| Opzionale                                        |
|--------------------------------------------------|
| Automatic Greasing System (AGS) - chassis + boom |
| Camera in boom head with screen in cab           |
| Comfort Ride Control (CRC) boom suspension       |
| Fire suppression system                          |
| Hydraulic hose sleeve burst protection           |



**Sede centrale**

MANITOU ITALIA Srl

Via Cristoforo Colombo 2, Loc. Cavazzona - 41013 CASTELFRANCO EMILIA (MO)

Tel: 059.95.98.11 - Fax 059.95.98.65

[www.manitou.com](http://www.manitou.com)



Questa pubblicazione presenta la descrizione delle versioni e delle possibilità di configurazione dei prodotti Manitou, che possono differire per attrezzature. Gli allestimenti presentati nel presente opuscolo possono essere di serie, optional o non disponibili, a seconda delle versioni. Manitou si riserva il diritto di modificare, in qualsiasi momento e senza alcun preavviso, le specifiche tecniche descritte e rappresentate. Le specifiche indicate non rappresentano alcun obbligo per il costruttore. Per maggiori dettagli, rivolgersi al proprio concessionario Manitou. Documento non contrattuale. Elenco delle specifiche non esaustivo. I loghi nonché l'identità visiva dell'azienda sono di proprietà di Manitou e non possono essere utilizzati senza autorizzazione. Tutti i diritti riservati. Le immagini e gli schemi contenuti nel presente opuscolo sono forniti esclusivamente a fini di consultazione e a titolo indicativo.

Manitou BF SA - Società anonima con consiglio di amministrazione. Capitale sociale: 39,668,399 euro - 857 802 508 RCS Nantes