

Fiche technique :

# 180 ATJ E

OXYGEN




 **MANITOU**  
HANDLING YOUR WORLD

| Capacities                              |         | Métrique                                                                                                       |
|-----------------------------------------|---------|----------------------------------------------------------------------------------------------------------------|
| Working height                          | h21     | 18.19 m                                                                                                        |
| Floor height (access)                   | h20     | 0.45 m                                                                                                         |
| Platform height                         | h7      | 16.19 m                                                                                                        |
| Max. outreach                           |         | 10.33 m                                                                                                        |
| Overhang                                |         | 7.43 m                                                                                                         |
| Pendular arm rotation (left / right)    |         | 90 ° / 90 °                                                                                                    |
| Pendular arm rotation (top / bottom)    |         | +65 ° / -59.50 °                                                                                               |
| Platform capacity                       | Q       | 250 kg                                                                                                         |
| Turret rotation                         |         | 350 °                                                                                                          |
| Platform rotation (right / left)        |         | 90 ° / 90 °                                                                                                    |
| Number of people (indoor / outdoor)     |         | 2 / 2                                                                                                          |
| Weight and dimensions                   |         |                                                                                                                |
| Platform weight*                        |         | 7550 kg                                                                                                        |
| Platform dimensions (length x width)    | lp / ep | 1.80 m x 0.76 m                                                                                                |
| Overall length                          | l1      | 7.61 m                                                                                                         |
| Overall width                           | b1      | 2.32 m                                                                                                         |
| Overall height                          | h17     | 2.48 m                                                                                                         |
| Overall length (stowed)                 | l9      | 5.43 m                                                                                                         |
| Overall height (stowed)                 | h18     | 2.83 m                                                                                                         |
| Counterweight offset (turret at 90°)    | a7      | 0.40 m                                                                                                         |
| Counterweight Oversize / Reach          |         | 0.40 m                                                                                                         |
| External turning radius                 | Wa3     | 3.75 m                                                                                                         |
| Ground clearance at centre of wheelbase | m2      | 0.40 m                                                                                                         |
| Wheelbase                               | y       | 2.30 m                                                                                                         |
| Performances                            |         |                                                                                                                |
| Drive speed - stowed                    |         | 5.30 km/h                                                                                                      |
| Drive speed - raised                    |         | 0.70 km/h                                                                                                      |
| Gradeability                            |         | 45 %                                                                                                           |
| Permissible leveling                    |         | 5 °                                                                                                            |
| Wheels                                  |         |                                                                                                                |
| Tires type                              |         | Foam-filled                                                                                                    |
| Standard tires                          |         | 914 x 370 mm                                                                                                   |
| Drive wheels (front / rear)             |         | 2 / 2                                                                                                          |
| Steering wheels (front / rear)          |         | 2 / 2                                                                                                          |
| Braking wheels (front / rear)           |         | 0 / 2                                                                                                          |
| Engine/Battery                          |         |                                                                                                                |
| Engine norm                             |         | Stage V                                                                                                        |
| Battery voltage                         |         | 48 V                                                                                                           |
| Battery nominal voltage / capacity      |         | 48 V / 480 Ah                                                                                                  |
| Battery energy                          |         | 23 kWh                                                                                                         |
| Integrated charger / charger            |         | 48 V / 60 A                                                                                                    |
| Miscellaneous                           |         |                                                                                                                |
| Ground Pressure                         |         | 10.50 dan/cm2                                                                                                  |
| Hydraulic Pressure                      |         | 240 bar                                                                                                        |
| Hydraulic tank capacity                 |         | 24 l                                                                                                           |
| Vibration on hands/arms                 |         | < 0 m/s²                                                                                                       |
| Standards compliance                    |         |                                                                                                                |
| This machine is in compliance with:     |         | European directives: 2006/42/EC- Machinery (revised EN280:2013) - 2004/108/EC (EMC) - 2006/95/EC (Low voltage) |


\*Varies according to options and standards of the country to which the machine is delivered

\*\* According to "REDUCE cycle"

180 ATJ e - Abaques

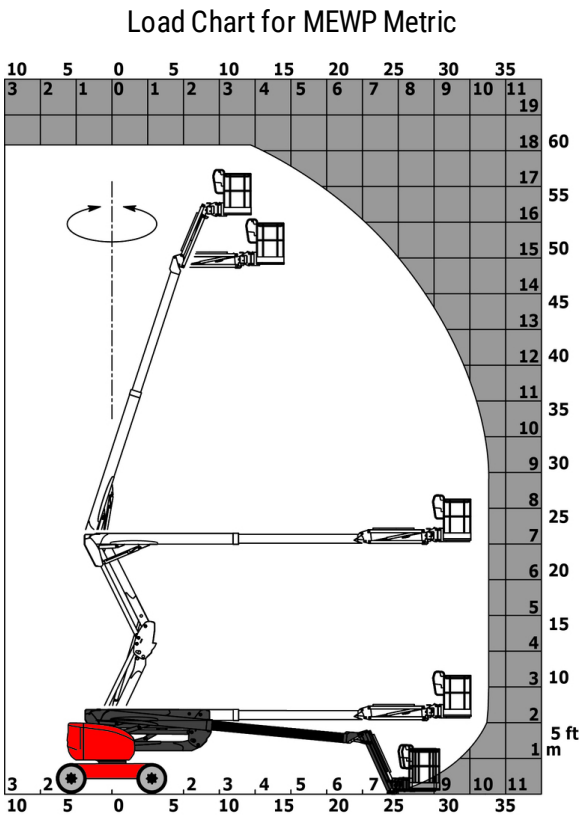

180 ATJ e - Schémas d'encombrement

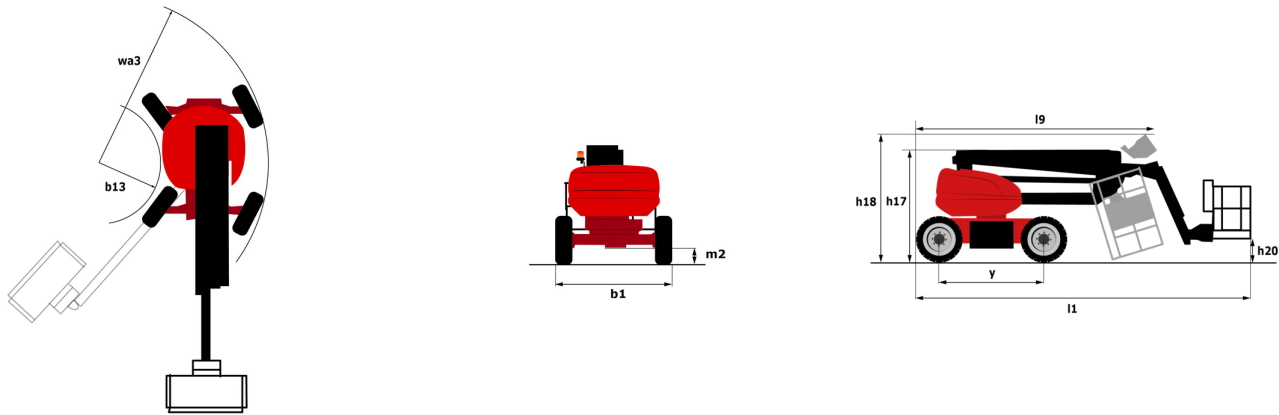

# Équipements

| Standard                                                                    |
|-----------------------------------------------------------------------------|
| 220V predisposition in the platform                                         |
| 4 simultaneous movements                                                    |
| 4 wheel drive                                                               |
| 4 wheel steer with crab mode                                                |
| Audible alarm and illuminated indicator lamp (leveling, overload, lowering) |
| Backup electrical pump                                                      |
| Basket 1,800 mm                                                             |
| CAN bus technology                                                          |
| Differential locking on rear axle                                           |
| Easy Link with 2 year Service                                               |
| Easy Manager                                                                |
| Emergency stop button in platform and on frame                              |
| Fully galvanized basket with demountable floor                              |
| Hom in the platform                                                         |
| Hour meter                                                                  |
| LED rotating beacon                                                         |
| Large color screen on turret                                                |
| Leveling unlocking                                                          |
| Load sensing pump                                                           |
| Operator presence pedal                                                     |
| Oscillating front axle                                                      |
| Rear axle with limited slip differential                                    |
| Screen information in the basket                                            |
| Secondary Protection System (SPS)                                           |
| Simplified lifting system without spreader bar                              |
| Slinging and securing rings                                                 |
| Steer and rotate                                                            |
| Turret orientation information                                              |
| Optionnel                                                                   |
| Beep on forward and backward by Lynx alarm                                  |
| Biodegradable hydraulic oil - Grade 32                                      |
| Biodegradable oil                                                           |
| Bottom screen protection                                                    |
| Continuous turret rotation                                                  |
| Digicode anti-theft device                                                  |
| Easy Link - With access control keypad                                      |
| Easy link - With remote lock                                                |
| Electric centralized filling                                                |
| External pneumatic supply source                                            |
| Fully galvanized basket 1800mm / 5'11" with lateral door                    |
| Galvanized basket 2,100 mm                                                  |
| Galvanized basket 2.100 mm / 6'11" with lateral door                        |
| Key lock on turret cover                                                    |
| Lighting pack                                                               |
| Locking the telescope by parameter setting                                  |
| OSS - Operation Safety System                                               |
| Personalized paintwork                                                      |
| Safety kit - Harness + helmet                                               |
| Socket 230 V + differential circuit breaker                                 |
| Water heater                                                                |
| Water predisposition                                                        |



**Siège Social**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



Cette publication présente le descriptif des versions et possibilités de configuration des produits Manitou qui peuvent différer en équipement. Les équipements présentés dans cette brochure peuvent être de série, en option, ou non disponibles suivant les versions. Manitou se réserve le droit, à tout moment et sans préavis, de modifier les spécifications décrites et représentées. Les spécifications portées n'engagent pas le constructeur. Pour plus de détails, contactez votre concessionnaire Manitou. Document non contractuel. Présentation des produits non contractuelle. Liste des spécifications non exhaustive. Les logos ainsi que l'identité visuelle de l'entreprise sont la propriété de Manitou et ne peuvent être utilisés sans autorisation. Tous droits réservés. Les photos et schémas contenus dans la présente brochure ne sont fournis qu'à des fins de consultation et à titre indicatif.

Manitou BF SA - Société anonyme à conseil d'administration - Capital social : 39 668 399 euros - 857 802 508 RCS Nantes