Technical sheet:

100 VJR








	100 VJR C	ססט Created on December 1, 2025 at 2:04 AM UTC	
Capacities		Metric	
Working height	h21	9.85 m	
Platform height	h7	7.90 m	
Maximum outreach		3.10 m	
Overhang		6.50 m	
Pendular arm rotation (top / bottom)		+58 ° / -56 °	
Platform capacity	Q	200 kg	
Turret rotation		350 °	
Number of people (indoor / outdoor)		2/1	
Weight and dimensions			
Platform weight*		2820 kg	
Platform dimensions (length x width)	lp / ep	1.19 m x 0.93 m	
Floor height (access)	h20	0.46 m	
Overall length	i1	2.80 m	
Overall width	b1	0.99 m	
Overall height	h17	1.99 m	
Jib length	I13	1.45 m	
Counterweight offset (turret at 90°)	a7	0.09 m	
External turning radius	Wa3	2.02 m	
Ground clearance under pothole protection	m6	0.03 m	
Ground clearance at centre of wheelbase	m2	0.09 m	
Wheelbase	У	1.20 m	
Performances	,	1.20 111	
Drive speed - stowed		5 km/h	
Drive speed - raised		0.65 km/h	
Gradeability		25 %	
Permissible leveling		2 °	
Wheels		_	
Tires type		Non marking cushion	
Standard tires		16.5-11 1/4 / 406 x 127 mm	
Drive wheels (front / rear)		0 / 2	
Steering wheels (front / rear)		2 / 0	
Braking wheels (front / rear)		0 / 2	
Engine/Battery		072	
Drive motor power rating		2 x 0.77 kW	
Lift motor power		3 kW	
Number of hydraulic pump / Capacity of hydraulic pump		2 x 3.75 cm ³	
Battery voltage		24 V	
Battery capacity		250 Ah	
On-board charger (V / A)		24 V / 30 A	
Miscellaneous		24 V / 30 A	
Number of cycles with STD Battery (HIRD)		29	
Ground Pressure		11.80 dan/cm2	
Hydraulic Pressure		140 bar	
•		22 l	
Hydraulic tank capacity		< 0.50 m/s ²	
Vibration on hands/arms Standards compliance		< 0.50 III/S*	
This machine is in compliance with:		European directives: 2006/42/EC- Machinery (revised EN280-1:2022) - 2004/108/EC (EMC) - EMC according to EN 12895 / 2015 +A1 / 2019	


^{*}Varies according to options and standards of the country to which the machine is delivered

100 VJR - Load chart


Load Chart for MEWP Metric

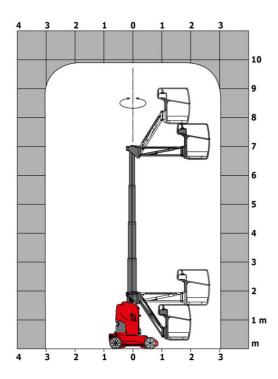

100 VJR - Dimensional drawing








Equipment

Audible alarm and illuminated indicator lamp (leveling, overload, lowering) CAN bus technology Easy Link with 2 year Service Emergency stop button in platform and on frame Fixed pothole protection Fork pockets Horn in the platform Manual emergency lowering Multi-function smartview display Multi-voltage integrated charger Negative-type braking on rear wheels Non-marking rubber tyres Pendular arm Platform with open-work floor Proportional controls Secondary Protection System (SPS) Slinging and securing rings Tool box in platform Traction battery

Optional
110 or 230V plug with differential circuit breaker
Audio warning on all motion
Audio warning on descent
Audio warning on movement
Basket with hinged doors
Biodegradable hydraulic oil - Grade 32
Centralized filling of the battery
Cold weather protection oil
Easy Link - With access control keypad
Easy link with remote lock
LED amber strobe light on the basket
LED strobe light on the turret
Maintenance-free battery
Personalized paintwork
Pre fitting electric supply IP65
Protective cover for control panel
Safety harness reminder indicator
Safety kit - Hamess + helmet
Turret orientation information
Working light (x1) on basket

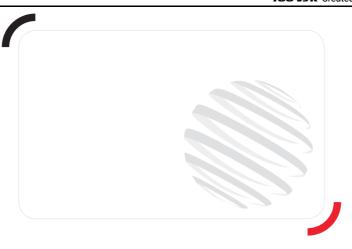



Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes