

:

100 VJR

OXYGEN
by MANITOU




 **MANITOU**
HANDLING YOUR WORLD



	h21	9.85 m
	h7	7.85 m
		3.10 m
		6.50 m
(/)		+58 ° / -56 °
	Q	200 kg
		350 °
		2 / 1
		2820 kg
) x	lp / ep	1.19 m x 0.93 m
	h20	0.46 m
	l1	2.80 m
	b1	0.99 m
	h17	1.99 m
	l13	1.45 m
.	a7	0.09 m
	Wa3	2.02 m
	m6	0.03 m
	m2	0.09 m
	y	1.20 m
		5 km/h
		0.65 km/h
		25 %
		2 °
		16.5-11 1/4 / 406 x 127 mm
/		0 / 2
/		2 / 0
/		0 / 2
/		2 x 0.77 kW
		3 kW
/		2 x 3.75 cm³
		24 V
		250 Ah
V) / A		24 V / 30 A
STD HIRD		29
		11 daN/cm2
		140 bar
		22 l
/		< 0.50 m/s²
		European directives: 2006/42/EC- Machinery (revised EN280-1:2022) - 2004/108/EC (EMC) - EMC according to EN 12895 / 2015 +A1 / 2019

*

100 VJR -

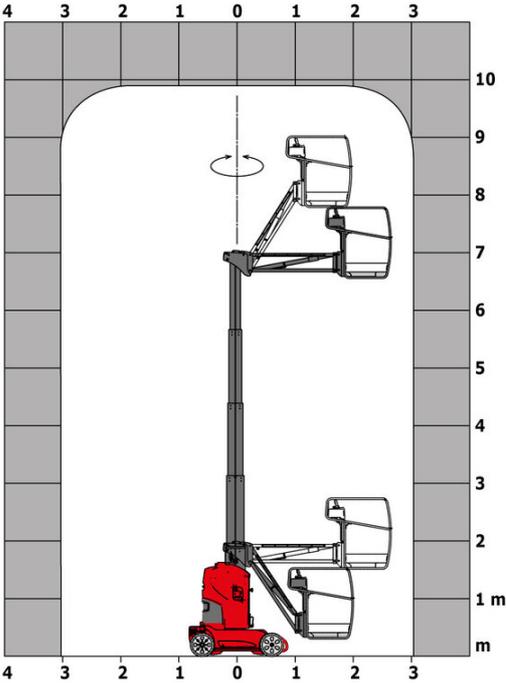

100 VJR -

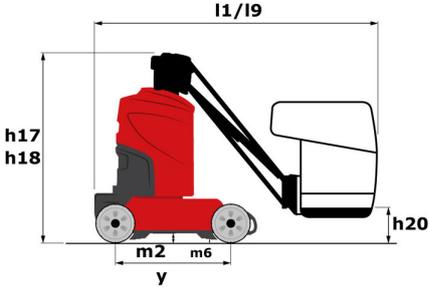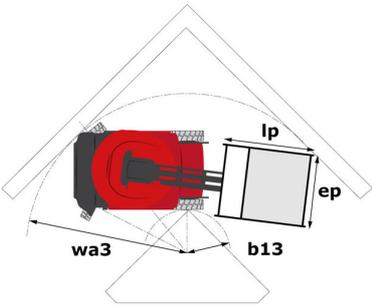

[Red Bar]

Audible alarm and illuminated indicator lamp (leveling, overload, lowering)

CAN

Easy Link 2

Emergency stop button in platform and on frame

Non-marking rubber tyres

Pendular arm

Proportional controls

[Redacted]

[Redacted]

- 48V - 35A - ZIVAN - -

[Redacted]

SPS

[Redacted]

[Redacted]

[Red Bar]

Cold weather protection oil

Easy Link -

Easy Link -

LED -

[Redacted]

LED

LED

[Redacted]

[Redacted]

[Redacted]

- 110V - 16A - (G)

-

- 32

[Redacted]

- 230V - IP65



B.P. 249 - 430 rue de l'Aubinière
44150 Ancenis Cedex - France
+33 (0)2 40 09 10 11 - +33 (0)2 40 09 10 97
www.manitou.com



Manitou

Manitou

MANITOU BF SA - - 39 668 399 - 857 802 508 RCS Nantes