Technical sheet:

170 AETJ-L




	170 AETJ-L Created on December 13, 2025 at 6.2	
Capacities	Metric	
Working height	h21 16.51 m	
Platform height	h7 14.51 m	
Maximum outreach	9 m	
Overhang	7 m	
Pendular arm rotation (top / bottom)	+70 ° / -70 °	
Platform capacity	Q 220 kg	
Turret rotation	355 °	
Platform rotation (right / left)	66 ° / 59 °	
Number of people (indoor / outdoor)	2/2	
Weight and dimensions		
Platform weight*	7225 kg	
Platform dimensions (length x width)	lp / ep 1.20 m x 0.92 m	
Floor height (access)	h20 0.40 m	
Overall length	l1 6.84 m	
Overall width	b1 1.75 m	
Overall height	h17 1.97 m	
Overall length (stowed)	19 5.12 m	
Overall height (stowed)	h18 *** 2.04 m	
Jib length	113 1.26 m	
Counterweight offset (turret at 90°)	a7 0.08 m	
External turning radius	Wa3 4.30 m	
Ground clearance at centre of wheelbase	m2 0.14 m	
Wheelbase	y 2 m	
Performances	y 2 III	
Drive speed - stowed	5 km/h	
Drive speed - raised	0.60 km/h	
Gradeability	22 %	
Permissible leveling	3°	
Wheels		
Tires type	Non marking cushion	
Standard tires	24 x 7.5 in / 600 x 190 m	
Drive wheels (front / rear)	0/2	11111
Steering wheels (front / rear)	2/0	
Braking wheels (front / rear)	0/2	
Engine/Battery	0 / 2	
Drive motor power rating	3 kW	
	3.70 kW	
Lift motor power	3.70 KW 48 V	
Battery voltage		
Battery nominal voltage / capacity	48 V / 240 Ah	
Battery energy	11 kWh	
On-board charger (V / A)	48 V / 30 A	
Miscellaneous		
Number of cycles with STD Battery (HIRD)	46	
Ground Pressure	16.60 dan/cm2	
Hydraulic Pressure	200 bar	
Hydraulic tank capacity	151	
Vibration on hands/arms	0.66 m/s ²	
Standards compliance This machine is in compliance with:	European directives: 2006/42/FC (revised EN280-1:2022) - 2004/108/E according to EN 12895 / 2015 +	C (EMC) - EMC


^{*}Varies according to options and standards of the country to which the machine is delivered

170 AETJ-L - Load chart


Load Chart metric

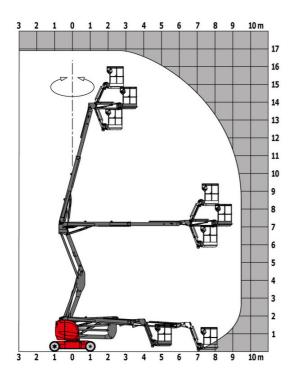

170 AETJ-L - Dimensional drawing







Equipment

230V Predisposition Audible alarm and illuminated indicator lamp (leveling, overload, lowering) CAN bus technology Easy Link with 2 year Service Emergency stop button in platform and on frame Horn in the platform Manual emergency lowering Multi-function smartview display Multi-voltage integrated charger Negative-type braking on rear wheels Non-marking rubber tyres Pendular arm Platform with open-work floor Proportional controls Secondary Protection System (SPS) Slinging and securing rings Tool box in platform Traction battery Travel possible at maximum height

Optional	
110 or 230V plug with differential circuit breaker	
Audio warning on all motion	
Audio warning on movement	
Biodegradable hydraulic oil - Grade 32	
Centralized filling of the battery	
Cold weather protection oil	
Easy Link - With access control keypad	
Easy link with remote lock	
External pneumatic supply source	
High capacity starting battery	
Maintenance-free battery	
Non-marking Foam Inflated Tires 683 x 236 mm / 27 x 10-12 in	
Personalized paintwork	
Protective cover for control panel	
Rail protection	
Safety kit - Hamess + helmet	
Turret orientation information	
Water predisposition	
Working light (x1) on basket	





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes