

Fiche technique :

# 160 ATJ+ RC




 **MANITOU**  
HANDLING YOUR WORLD

| Capacités                               |         | Métrique   |
|---|---------|--|
| Working height                          | h21     | 16.21 m  |
| Platform height                         | h7      | 14.21 m  |
| Max. outreach                           |         | 8.52 m   |
| Overhang                                |         | 7.39 m   |
| Pendular arm rotation (top / bottom)    |         | +66.50 ° / -65.80 °  |
| Platform capacity                       | Q       | 408 kg   |
| Turret rotation                         |         | 360 °  |
| Platform rotation (right / left)        |         | 90 ° / 90 °  |
| Number of people (indoor / outdoor)     |         | 3 / 3  |
| Weight and dimensions                   |         |  |
| Platform weight*                        |         | 7500 kg  |
| Platform dimensions (length x width)    | lp / ep | 2.30 m x 0.90 m  |
| Floor height (access)                   | h20     | 0.38 m   |
| Overall length                          | l1      | 7.09 m   |
| Overall width                           | b1      | 2.38 m   |
| Overall height                          | h17     | 2.47 m   |
| Overall length (stowed)                 | l9      | 4.89 m   |
| Overall height (stowed)                 | h18 *** | 2.94 m   |
| Counterweight offset (turret at 90°)    | a7      | 0.19 m   |
| External turning radius                 | Wa3     | 4.03 m   |
| Ground clearance at centre of wheelbase | m2      | 0.40 m   |
| Wheelbase                               | y       | 2.20 m   |
| Performances                            |         |  |
| Drive speed - stowed                    |         | 5 km/h   |
| Drive speed - raised                    |         | 1 km/h   |
| Gradeability                            |         | 45 %   |
| Permissible leveling                    |         | 5 °  |
| Wheels                                  |         |  |
| Tires type                              |         | Foam-filled  |
| Drive wheels (front / rear)             |         | 2 / 2  |
| Steering wheels (front / rear)          |         | 2 / 2  |
| Braking wheels (front / rear)           |         | 0 / 2  |
| Engine/Battery                          |         |  |
| Engine brand / model                    |         | Kubota - D1105-E4B   |
| Engine norm                             |         | Stage V  |
| I.C. Engine power rating / Power        |         | 24.50 Hp / 18.50 kW  |
| Miscellaneous                           |         |  |
| Ground Pressure                         |         | 11.60 dan/cm2  |
| Hydraulic Pressure                      |         | 340 bar  |
| Hydraulic tank capacity                 |         | 54.20 l  |
| Fuel tank                               |         | 52 l   |
| Noise to environment (LwA)              |         | < 105 dB   |
| Vibration on hands/arms                 |         | < 0.50 m/s <sup>2</sup>  |
| Daily consumption **                    |         | 4.51 l   |
| Standards compliance                    |         |  |
| This machine is in compliance with:     |         | European directives: 2006/42/EC- Machinery (revised EN280-1:2022) - 2004/108/EC (EMC) - 2006/95/EC (Low voltage) |


\*Varies according to options and standards of the country to which the machine is delivered

# 160 ATJ+ RC - Abaques

## Load Chart for MEWP Metric

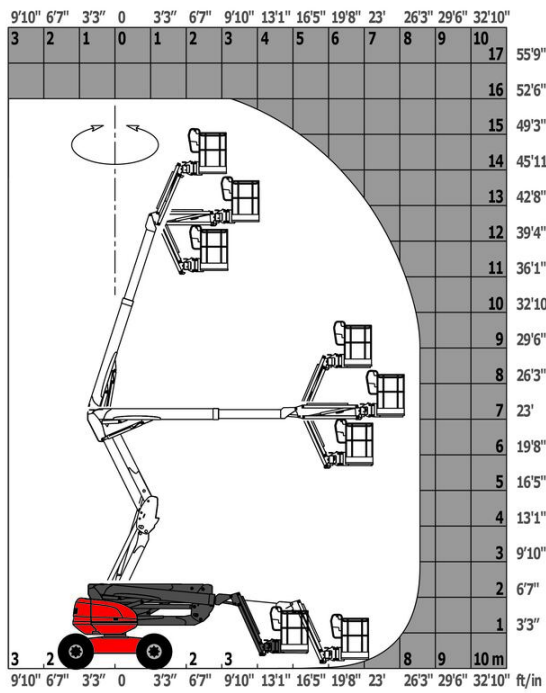

## 160 ATJ+ RC - Schémas d'encombrement

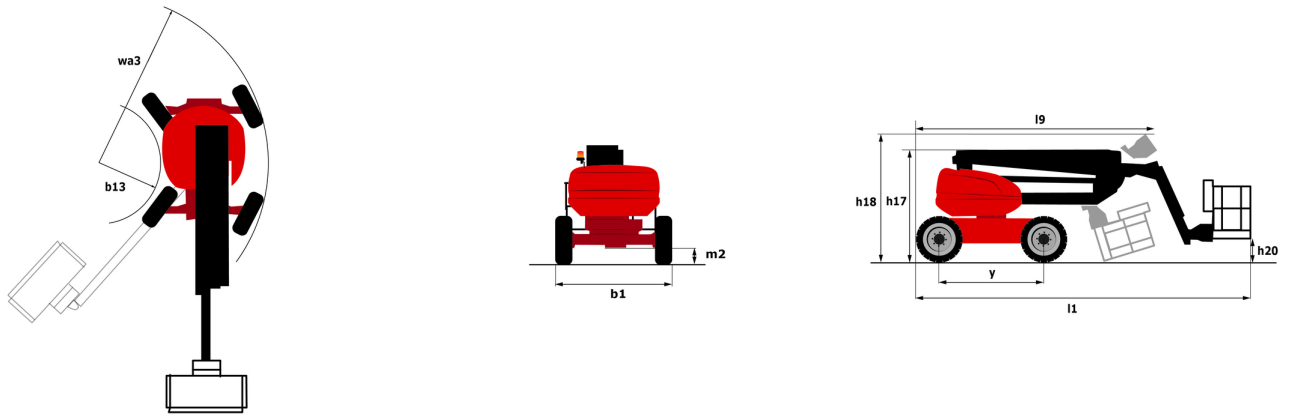

# Équipements

## Standard

230V Predisposition  
 4 simultaneous movements  
 4 wheel drive  
 4 wheel steer with crab mode  
 Audible alarm and illuminated indicator lamp (leveling, overload, lowering)  
 Backup electrical pump  
 CAN bus technology  
 Continuous turret rotation  
 Dead man pedal  
 Differential locking on rear axle  
 Easy Link with 2 year Service  
 Easy fast slinging system  
 Front axle with limited slip  
 Fuel gauge with low level indicator  
 Heavy-duty painted basket 2.30 m  
 Hom in the platform  
 Hour meter  
 Integrated diagnostic assistance  
 LED rotating beacon  
 Large basket with three entries  
 Large color screen on turret  
 Leveling unlocking  
 Management via engine speed bearing  
 Oscillating front axle  
 Secondary Protection System (SPS)  
 Stop & Go system

## Optionnel

Additional storage boxes  
 Battery blanket  
 Battery charger automatic start  
 Biodegradable hydraulic oil - Grade 32  
 Coded anti-start  
 High capacity starting battery  
 Hydraulic oil heater  
 Key lock on turret cover  
 Large basket 2.30m with lateral door  
 Lockable fuel cap  
 Non-marking tyres  
 On-board generator (3,5 or 5 kW)  
 Painted narrow basket for heavy loads 1800mm (5 ft 11 in.)  
 Panel cradle  
 Personalized paintwork  
 Pipe cradle  
 Protection screen and key lock turret  
 Safety kit - Harness + helmet  
 Socket 230 V+ differential circuit breaker  
 Spark arresting muffler  
 Water heater  
 Water predisposition



**Siège Social**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



Cette publication présente le descriptif des versions et possibilités de configuration des produits Manitou qui peuvent différer en équipement. Les équipements présentés dans cette brochure peuvent être de série, en option, ou non disponibles suivant les versions. Manitou se réserve le droit, à tout moment et sans préavis, de modifier les spécifications décrites et représentées. Les spécifications portées n'engagent pas le constructeur. Pour plus de détails, contactez votre concessionnaire Manitou. Document non contractuel. Présentation des produits non contractuelle. Liste des spécifications non exhaustive. Les logos ainsi que l'identité visuelle de l'entreprise sont la propriété de Manitou et ne peuvent être utilisés sans autorisation. Tous droits réservés. Les photos et schémas contenus dans la présente brochure ne sont fournis qu'à des fins de consultation et à titre indicatif.

Manitou BF SA - Société anonyme à conseil d'administration - Capital social : 39 668 399 euros - 857 802 508 RCS Nantes