Technical sheet:

260 TJ+ ST5






	260 TJ+ ST5 Cre	ated on December 15, 2025 at 6:55 PM UTC
Capacities		Metric
Working height	h21	25.89 m
Platform height	h7	23.89 m
Maximum outreach		19.70 m
Pendular arm rotation (top / bottom)		+70 ° / -63 °
Platform capacity	Q	408 kg
Turret rotation	,	360 °
Platform rotation (right / left)		90 ° / 90 °
Number of people (indoor / outdoor)		3 / 3
Weight and dimensions		070
Platform weight*		16710 kg
Platform dimensions (length x width)	lp / ep	2.30 m x 0.90 m
Floor height (access)	h20	0.48 m
- , , ,		
Overall length	11	10.84 m
Overall width	b1	2.48 m
Overall height	h17	2.71 m
Overall length (stowed)	19	7.88 m
Overall height (stowed)	h18 ***	2.80 m
Jib length	l13	2.40 m
Counterweight offset (turret at 90°)	a7	1.43 m
External turning radius	Wa3	4.35 m
Ground clearance at centre of wheelbase	m2	0.42 m
Wheelbase	у	2.80 m
Performances		
Drive speed - stowed		4.50 km/h
Drive speed - raised		0.80 km/h
Gradeability		35 %
Permissible leveling		4 °
Wheels		
Tires type		Solid tires
Standard tires		40 x 14 in / 1025 x 365 mm
Drive wheels (front / rear)		2/2
Steering wheels (front / rear)		2/2
Braking wheels (front / rear)		2/2
Engine/Battery		
Engine brand / model		Yanmar - 4TNV88C
Engine norm		Stage V
Engine power (Hp / kW)		46 Hp / 34.30 kW
Miscellaneous		ie np y o nee ku
Ground Pressure		21.30 dan/cm2
Hydraulic Pressure		400 bar
Hydraulic tank capacity		94
Fuel		76
Sound pressure level (platform work station) (LpA)		76 I 79 dB
Daily consumption **		71
Standards compliance This machine is in compliance with:		European directives: 2006/42/EC- Machinery (revised EN280-1:2022) - 2004/108/EC (EMC) - EMC according to EN 12895 / 2015 +A1 / 2019

^{*}Varies according to options and standards of the country to which the machine is delivered ** According to "REDUCE cycle" $\,$


260 TJ+ ST5 - Load chart


Load Chart for MEWP Metric

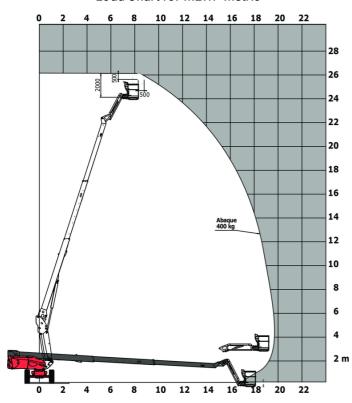

260 TJ+ ST5 - Dimensional drawing







Equipment

Standard

230V Predisposition

4 simultaneous movements

4 wheel drive

4 wheel steer with crab mode

Audible alarm and illuminated indicator lamp (leveling, overload, lowering)

Backup electrical pump

Connected machine

Continuous turret rotation

Differential locking on rear axle

Electronic platform compensation

Emergency stop button in platform and on frame

Engine compartment with key lock

Engine mounted on sliding platform

Engine with DPF (Diesel Particulate Filter)

Front axle with limited slip

Fuel gauge with low level indicator

Hour meter

Integrated diagnostic assistance

LED rotating beacon

LS pump

Large color screen on turret

Leveling unlocking

Operator presence pedal

Oscillating front axle

Painted basket for heavy loads 2,300 mm (7ft 7 in.)

Protective cover for control panel

Remote control for transport

Secondary Protection System (SPS)

Stop & Go system

Turret orientation information

X Y function

Yellow and black safety stickers on moving parts

Optiona

110 or 230V plug with differential circuit breaker

Additional storage boxes

Audio warning on all motion

Audio warning on movement

Pattern blanket

Battery blanket

Battery charger

Battery charger automatic start

Battery cut-off

Biodegradable hydraulic oil - Grade 32

Earthing and shortcircuiting pre-fitting (Bolted ball)

Easy Link - With access control keypad

Easy link with remote lock

Engine Block Heater

External pneumatic supply source

Hydraulic oil for cold temperature

Hydraulic oil heater

Key lock on fuel tank

LED amber strobe light on the basket

Non-marking tires

On-board generator (3,5 or 5 kW)

Packing for containerization

Painted basket - For heavy loads - Width: 2300 mm (7 ft. 7 in.)

Painted narrow basket for heavy loads 1800mm (5 ft 11 in.)

Panel cradle

Pipe cradle

Rail protection

Reflective stripes

Safety kit - Harness + helmet

Safety valve

Socket 230 V + differential circuit breaker

Starter battery charger and engine pre-heater with common outlet

Water predisposition

Working light





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes