Technical sheet:

280 TJ ST5






	280 13 313 016	280 TJ STS Created on December 15, 2025 at 1.51 AM UTC	
Capacities		Metric	
Working height	h21	27.73 m	
Platform height	h7	25.73 m	
Maximum outreach		21.45 m	
Pendular arm rotation (top / bottom)		+56.80 ° / -62 °	
Platform capacity / capacity (maximum)	Q	240 kg / 350 kg	
Turret rotation		360 °	
Platform rotation (right / left)		90 ° / 90 °	
Number of people (indoor / outdoor)		3 / 2	
Weight and dimensions			
Platform weight*		16900 kg	
Platform dimensions (length x width)	lp / ep	2.30 m x 0.90 m	
Floor height (access)	h20	0.48 m	
Overall length	l1	11.36 m	
Overall width	b1	2.48 m	
Overall height	h17	2.73 m	
Overall length (stowed)	19	8.09 m	
Overall height (stowed)	h18 ***	2.71 m	
Jib length	l13	3.80 m	
Counterweight offset (turret at 90°)	a7	1.43 m	
External turning radius	Wa3	4.35 m	
Ground clearance at centre of wheelbase	m2	0.41 m	
Wheelbase	IIIZ	2.80 m	
Performances	У	2.80 III	
Drive speed - stowed		4.50 km/h	
Drive speed - raised		4.50 km/h	
·		0.80 km/m	
Gradeability		4 °	
Permissible leveling Wheels		4	
		Solid tires	
Tires type Standard tires			
		40 x 14 in / 1025 x 365 mm 2 / 2	
Drive wheels (front / rear)			
Steering wheels (front / rear)		2 / 2	
Braking wheels (front / rear)		2/2	
Engine/Battery		V 4711//000	
Engine brand / model		Yanmar - 4TNV88C	
Engine norm		Stage V	
Engine power (Hp / kW)		46 Hp / 34.30 kW	
Miscellaneous			
Ground Pressure		21.30 dan/cm2	
Hydraulic Pressure		400 bar	
Hydraulic tank capacity		941	
Fuel		761	
Sound pressure level (platform work station) (LpA)		79 dB	
Vibration on hands/arms		0.50 m/s²	
Daily consumption **		81	
Standards compliance			
This machine is in compliance with:		European directives: 2006/42/EC- Machinery (revised EN280-1:2022) - 2004/108/EC (EMC) - EMC according to EN 12895 / 2015 +A1 / 2019	

^{*}Varies according to options and standards of the country to which the machine is delivered ** According to "REDUCE cycle" $\,$


280 TJ ST5 - Load chart


Load Chart for MEWP Metric

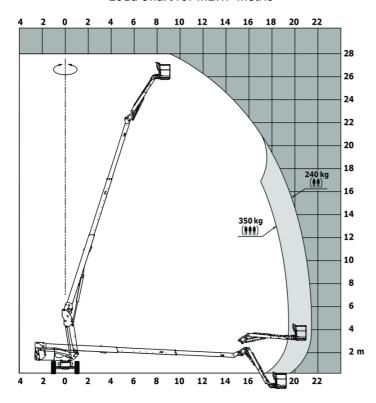

280 TJ ST5 - Dimensional drawing







Equipment

X Y function

Yellow and black safety stickers on moving parts

230V Predisposition 4 simultaneous movements 4 wheel drive 4 wheel steer with crab mode Audible alarm and illuminated indicator lamp (leveling, overload, lowering) Backup electrical pump Connected machine Continuous turret rotation Dead man pedal Differential locking on rear axle Electronic platform compensation Emergency stop button in platform and on frame Engine compartment with key lock Engine on swivel chair Engine with DPF (Diesel Particulate Filter) Front axle with limited slip Fuel gauge with low level indicator Heavy-duty painted basket 2.30 m Horn in the platform Hour meter Integrated diagnostic assistance LED rotating beacon LS pump Large color screen on turret Leveling unlocking Oscillating front axle Painted basket for heavy loads 2,300 mm (7ft 7 in.) Protective cover for control panel Remote control for transport Secondary Protection System (SPS) Stop & Go system Telescopic jib Turret orientation information

Optional
Additional storage boxes
Audio warning on all motion
Audio warning on movement
Battery blanket
Battery charger automatic start
Battery cut-off
Biodegradable hydraulic oil - Grade 32
Cold weather protection oil
Earthing and shortcircuiting pre-fitting (Bolted ball)
Easy Link with access control keypad
Easy link with remote lock
Engine Block Heater
External pneumatic supply source
Hydraulic oil heater
Key lock on fuel tank
LED amber strobe light on the basket
Non marking tires
On-board generator (3,5 or 5 kW)
Packing for containerization
Painted basket - For heavy loads - Width: 2300 mm (7 ft. 7 in.)
Painted narrow basket for heavy loads 1800mm (5 ft 11 in.)
Panel cradle
Personalized paintwork
Pipe cradle
Rail protection
Reflective stripes
Safety kit - Hamess + helmet
Socket 230 V + differential circuit breaker
Water predisposition
Working light





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes