Technical sheet:

SE 0808








Metric 7.80 m 7.80 m 7.80 m 5.80 m 5.80 m 230 kg 115 kg 2 / 1 1500 kg 1.64 m x 0.75 m 2.54 m x 0.75 m 1.02 m 1.88 m
7.80 m 7.80 m 5.80 m 5.80 m 230 kg 115 kg 2 / 1 1500 kg 1.64 m x 0.75 m 2.54 m x 0.75 m
7.80 m 5.80 m 5.80 m 230 kg 115 kg 2 / 1 1500 kg 1.64 m x 0.75 m 2.54 m x 0.75 m
5.80 m 5.80 m 230 kg 115 kg 2 / 1 1500 kg 1.64 m x 0.75 m 2.54 m x 0.75 m
5.80 m 230 kg 115 kg 2 / 1 1500 kg 1.64 m x 0.75 m 2.54 m x 0.75 m
230 kg 115 kg 2 / 1 1500 kg 1.64 m x 0.75 m 2.54 m x 0.75 m 1.02 m
115 kg 2 / 1 1500 kg 1.64 m x 0.75 m 2.54 m x 0.75 m 1.02 m
115 kg 2 / 1 1500 kg 1.64 m x 0.75 m 2.54 m x 0.75 m 1.02 m
2 / 1 1500 kg 1.64 m x 0.75 m 2.54 m x 0.75 m 1.02 m
1500 kg 1.64 m x 0.75 m 2.54 m x 0.75 m 1.02 m
1.64 m x 0.75 m 2.54 m x 0.75 m 1.02 m
1.64 m x 0.75 m 2.54 m x 0.75 m 1.02 m
2.54 m x 0.75 m 1.02 m
1.02 m
0.81 m
2.17 m
1.99 m
0.90 m
2.76 m
1.73 m
0 m
0.01 m
0.01 m
1.40 m
1.40 III
4.50 km/h
0.80 km/h
17 s / 18 s
25 %
3.50 ° / 1.50 °
Oalid was madding the c
Solid non-marking tires
12 x 4 in / 305 x 106 mm
2 / 0
2 / 0
2 / 0
Electric
Semi-traction
4 / 6 V / 185 Ah
4.40 kW/h
24 V / 30 A
146
250 bar
12
66.60 dB
< 0.50 m/s ²
European directives: 2006/42/EC- Machinery


^{*}Varies according to options and standards of the country to which the machine is delivered *** With folded guardrail

SE 0808 - Load chart

Load Chart for MEWP Metric

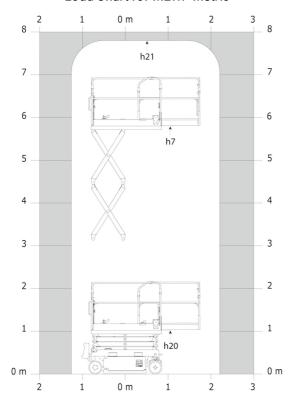

SE 0808 - Dimensional drawing

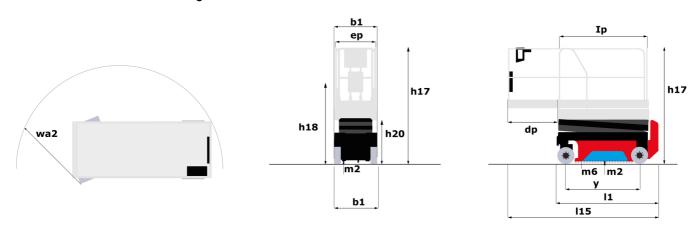

Equipment

2 swing out component trays (hydraulic/electric) Audible alarm and illuminated indicator lamp (leveling, overload, lowering) Battery - 24V - 185Ah - semi-traction Battery charge indicator lamp CAN bus technology Colour screen with integrated diagnostics Descent alarm Easy Link with 2 year Service Electrical front wheel brake Emergency stop button in platform and on frame Folding rails with full height access gate Horn in the platform Hour meter Manual emergency lowering Multi-voltage on-board charger - 24V - 30A - Single-phase Pothole protection with automatic operation Side and rear forklift pockets Sliding basket extension - 90 cm

Optional Audio warning on all motion Audio warning on translation Easy Link - With access control keypad Easy link with remote lock Electric plug - 110 or 230V - In the basket - With differential circuit breaker - European type External pneumatic supply source Working light (x1) on basket





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes