Technical sheet:

# **200 ATJ RC ST5**






eated on November 3, 2025 at 2:05 PM U
Metric
20.37 m
18.37 m
11.99 m
7.97 m
+69 ° / -66 °
230 kg
360 °
90 ° / 90 °
2/2
10050 kg
2.10 m x 0.80 m
500 mm
8.42 m
2.47 m
2.71 m
6.08 m
3.12 m
0.12 m
3.90 m
0.44 m
2.40 m
4.70 km/h
0.80 km/h
40 %
5 °
•
Cured-on solid tires
1025 x 365 mm
2/2
2/2
0 / 2
-, -
Yanmar - 3TNV88C
Stage IIIA
34 Hp / 25.50 kW
0111p7 20100 KH
20.65 dan/cm2
335 bar
80 I
78
701
European directives: 2006/42/EC- Machinery (revised EN280-1:2022) - 2004/108/EC (EMC) - EM
according to EN 12895 / 2015 +A1 / 2019


<sup>\*</sup>Varies according to options and standards of the country to which the machine is delivered


## 200 ATJ RC ST5 - Load chart


### Load Chart metric

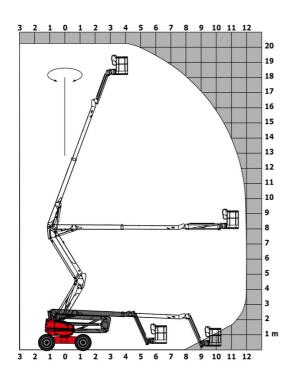

# 200 ATJ RC ST5 - Dimensional drawing







# **Equipment**

#### Standard

230V Predisposition

4 simultaneous movements

4 wheel drive

4 wheel steer with crab mode

Audible alarm and illuminated indicator lamp (leveling, overload, lowering)

Backup electrical pump

CAN bus technology

Continuous turret rotation

Dead man pedal

Differential locking on rear axle

Easy Link with 2 year Service

Emergency stop button in platform and on frame

Engine compartment with key lock

Engine with DPF (Diesel Particulate Filter)

Front axle with limited slip

Fuel gauge with low level indicator

Galvanized basket 2,100 mm

Hour mate

Integrated diagnostic assistance

LED rotating beacon

Large color screen on turret

Management via engine speed bearing

Oscillating front axle

Proportional controls

Secondary Protection System (SPS)

Stop & Go system

#### Optional

110 or 230V plug with differential circuit breaker

Battery charger

Battery cut-off

Biodegradable hydraulic oil - Grade 32

Coded anti-start

Cold weather protection oil

Engine compartment with key lock

Fuel tank locking cap

Galvanized basket 2,100 mm

High capacity starting battery

Oil tank locking cap

On-board generator (3,5 or 5 kW)

Safety kit - Harness + helmet

Screen protection on the lower box control

Socket 230 V + differential circuit breaker

Water heater





#### **Head Office**

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes