

Fiche technique :

# 120 AETJ-C 3D

---




 **MANITOU**  
HANDLING YOUR WORLD

| Capacities                                    |         | Métrique                |
|-----------------------------------------------|---------|-------------------------|
| Working height                                | h21     | 11.95 m                 |
| Floor height (access)                         | h20     | 0.40 m                  |
| Platform height                               | h7      | 9.95 m                  |
| Max. outreach                                 |         | 7 m                     |
| Overhang                                      |         | 6.40 m                  |
| Pendular arm rotation (left / right)          |         | 70 ° / 70 °             |
| Pendular arm rotation (top / bottom)          |         | +70 ° / -70 °           |
| Platform capacity                             | Q       | 200 kg                  |
| Turret rotation                               |         | 360 °                   |
| Platform rotation (right / left)              |         | 66 ° / 59 °             |
| Number of people (indoor / outdoor)           |         | 2 / 2                   |
| Weight and dimensions                         |         |                         |
| Platform weight*                              |         | 6660 kg                 |
| Platform dimensions (length x width)          | lp / ep | 1.20 m x 0.92 m         |
| Overall length                                | l1      | 5.48 m                  |
| Overall width                                 | b1      | 1.20 m                  |
| Overall height                                | h17     | 1.99 m                  |
| Overall length (stowed)                       | l9      | 3.74 m                  |
| Overall height (stowed)                       | h18     | 2.16 m                  |
| Jib length                                    | l13     | 1.26 m                  |
| Counterweight offset (turret at 90°)          | a7      | 0.23 m                  |
| External turning radius                       | Wa3     | 3.34 m                  |
| Ground clearance with pothole guards deployed | m6      | 0.02 m                  |
| Ground clearance at centre of wheelbase       | m2      | 0.10 m                  |
| Wheelbase                                     | y       | 1.65 m                  |
| Performances                                  |         |                         |
| Drive speed - stowed                          |         | 6 km/h                  |
| Drive speed - raised                          |         | 0.60 km/h               |
| Gradeability                                  |         | 25 %                    |
| Permissible leveling                          |         | 3 °                     |
| Wheels                                        |         |                         |
| Tires type                                    |         | Solid non-marking tires |
| Standard tires                                |         | 600 x 190 mm            |
| Drive wheels (front / rear)                   |         | 0 / 2                   |
| Steering wheels (front / rear)                |         | 2 / 0                   |
| Braking wheels (front / rear)                 |         | 0 / 2                   |
| Engine/Battery                                |         |                         |
| Electric engine power rating                  |         | 2 x 4.50 kW             |
| Electric Pump                                 |         | 3.70 kW                 |
| Battery voltage                               |         | 48 V                    |
| Battery nominal voltage / capacity            |         | 48 V / 240 Ah           |
| Battery energy                                |         | 11 kWh                  |
| Integrated charger / charger                  |         | 48 V / 30 A             |
| Miscellaneous                                 |         |                         |
| Number of cycles with STD Battery (HIRD)      |         | 60                      |
| Ground Pressure                               |         | 20 dan/cm2              |
| Hydraulic Pressure                            |         | 200 bar                 |
| Hydraulic oil tank capacity                   |         | 18 l                    |
| Vibration on hands/arms                       |         | < 2.50 m/s²             |


\*Varies according to options and standards of the country to which the machine is delivered

120 AETJ-C 3D - Abaques

Load Chart metric

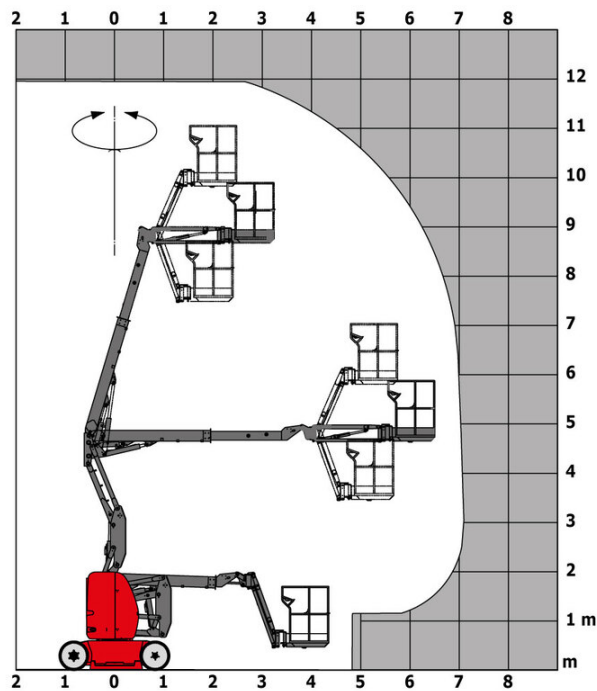

120 AETJ-C 3D - Schémas d'encombrement

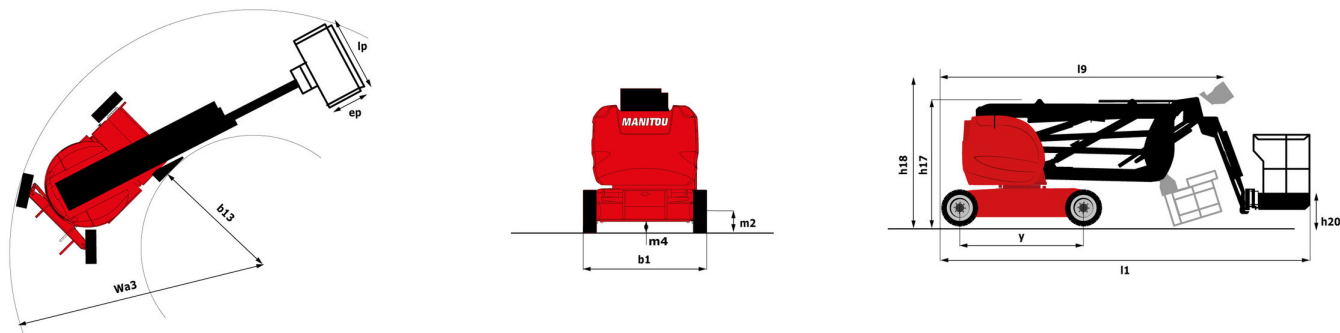

# Équipements

| Standard                                                                    |
|-----------------------------------------------------------------------------|
| 230V Predisposition                                                         |
| 3D                                                                          |
| Audible alarm and illuminated indicator lamp (leveling, overload, lowering) |
| Battery charge indicator lamp                                               |
| CAN bus technology                                                          |
| Easy Manager                                                                |
| Emergency stop button in platform and on frame                              |
| Hom in the platform                                                         |
| Hour meter                                                                  |
| Integrated diagnostic assistance                                            |
| Manual emergency lowering                                                   |
| Multi-voltage integrated charger                                            |
| Negative-type braking on rear wheels                                        |
| Non-marking rubber tyres                                                    |
| Pendular arm                                                                |
| Platform with mesh floor                                                    |
| Pothole protection with automatic operation                                 |
| Proportional controls                                                       |
| Slings and securing rings                                                   |
| Tool box in platform                                                        |
| Traction battery                                                            |

| Optionnel                                          |
|----------------------------------------------------|
| 110 or 230V plug with differential circuit breaker |
| Biodegradable oil                                  |
| Cold weather protection oil                        |
| Highly capacity battery                            |
| Lights                                             |
| Maintenance-free battery                           |
| Personalized paintwork                             |
| Protective cover for control panel                 |
| SMS : Safe Man System                              |
| Safety harness                                     |
| Water predisposition                               |
| Working headlight in platform                      |



**Siège Social**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



Cette publication présente le descriptif des versions et possibilités de configuration des produits Manitou qui peuvent différer en équipement. Les équipements présentés dans cette brochure peuvent être de série, en option, ou non disponibles suivant les versions. Manitou se réserve le droit, à tout moment et sans préavis, de modifier les spécifications décrites et représentées. Les spécifications portées n'engagent pas le constructeur. Pour plus de détails, contactez votre concessionnaire Manitou. Document non contractuel. Présentation des produits non contractuelle. Liste des spécifications non exhaustive. Les logos ainsi que l'identité visuelle de l'entreprise sont la propriété de Manitou et ne peuvent être utilisés sans autorisation. Tous droits réservés. Les photos et schémas contenus dans la présente brochure ne sont fournis qu'à des fins de consultation et à titre indicatif.

Manitou BF SA - Société anonyme à conseil d'administration - Capital social : 39 668 399 euros - 857 802 508 RCS Nantes